

# 10D-VO



## Voltage Output, Digital-to-Analog Signal Conditioner

### DESCRIPTION

10D-VO analog voltage output modules are designed to interface with a wide range of sensors and equipment used in industrial test and measurement applications that accept voltage-level signals.

Each module provides a single channel of 14-bit controlled isolated voltage output for use in industrial process control applications.

Configurable discrete output pins enable real-time fault monitoring and rapid response, ensuring seamless process flow and fail-safe operation for enhanced reliability and efficiency in industrial environments.

Digital-to-output isolation is rated at a robust 1500Vrms and all field-side outputs are protected against accidental power-line connections up to 40Vrms. These features safeguard measurement and control equipment from the harmful effects of signal noise, transient surges, ground loops, and other industrial hazards.

Over-range and under-range up to 10% beyond specified output values are supported with accuracy guaranteed to  $\pm$ full-scale. All 10D modules are housed in rugged thermoplastic packages and are specified to operate over the industrial temperature range of  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ .

### FEATURES


- Interface to Process Voltage Controlled Field Devices
- 1 Output Channel
- Configurable Default Channel Output
- Configurable Discrete Outputs for Fault Detection and Response
- 1500Vrms Digital-to-Output Isolation
- Output Protected up to 40Vrms
- CE Compliant
- 14-Bit Resolution
- Operating temperature:  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$

### BENEFITS

- Small Footprint
- Simplifies Industrial Process Control Design
- Reduces System BOM
- Protects Sensitive System Components
- Breaks Ground Loops
- Reduces EMC Concerns

### APPLICATIONS

- Signal Conditioning
- Relay Switching
- Temperature Regulation
- Test and Measurement
- PID Control
- Motor Control
- Pump Control
- Industrial Process Control

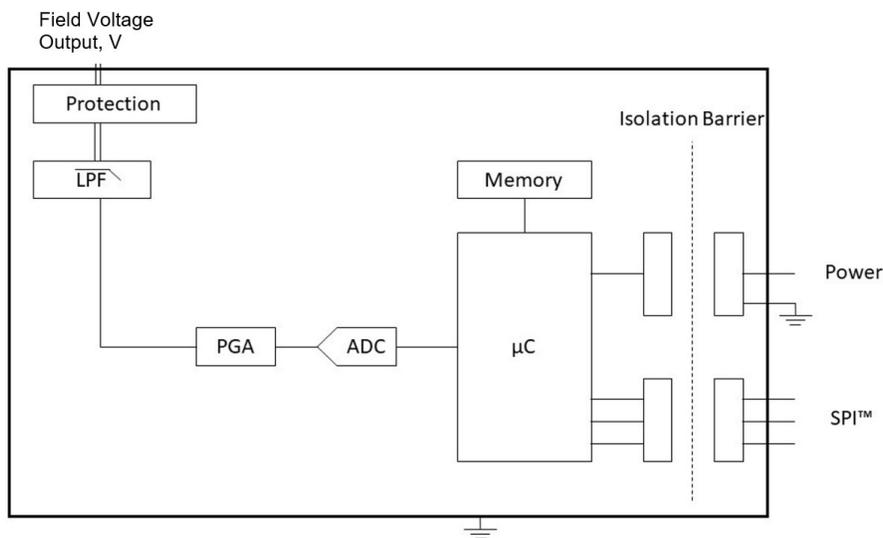

10D-VO Block Diagram

**Specifications** Typical\* at T<sub>A</sub> = +25°C and +3.3VDC power

Module	10D-VO-xxx-xx
10D-VO-xxx-xx	1-channel Process Voltage Output
Output Range	See Ordering Information
Output Drive (Max Load) Over-range Capability	10mA (1000Ω at 10V) 10% Span
Output Protection Continuous <sup>(1)</sup> Transient	40Vrms (max) EN61000-6-2
CMV Digital-to-Output Transient CMR (50Hz or 60Hz)	1500Vrms (max) EN61000-6-2 90dB at 50/60Hz
Accuracy <sup>(2)</sup> Linearity Stability Zero Span	±0.04% Span ±0.03% Span  ±25ppm/°C ±35ppm/°C
Bandwidth, -3dB Update Rate	100Hz 4000 S/s
ADC Resolution Discrete Inputs Discrete Outputs Discrete Output Drive Current	14-bit 1 2 4mA
Interface Clock Input SPI Mode Bit Order	SPI <sup>(3)</sup> 1MHz (max) 1 MSB First
Power Supply Voltage Power Supply Current	+3.0 to +5.25VDC 70mA at No Load, 110mA at Full Load
Mechanical Dimensions (h)(w)(d)	0.350" x 2.00" x 1.00" (8.89mm x 50.8mm x 25.4mm)
Environmental Operating Temp. Range Storage Temp. Range Relative Humidity Emissions EN61000-6-4 Radiated, Conducted Immunity EN61000-6-2 RF ESD, EFT	-40°C to +85°C -40°C to +85°C 0 to 95% Noncondensing ISM, Group 1 Class A ISM, Group 1 Performance A ±0.5% Span Error Performance B

**Ordering Information**

Model	Input	Output Range
10D-VO-1H1-01	SPI	-10V to +10V
10D-VO-1H1-02	SPI	-5V to +5V
10D-VO-1H1-03	SPI	0V to +10V
10D-VO-1H1-04	SPI	0V to +5V

## NOTES:

\*Contact factory or your local Dataforth sales office for maximum values.

- (1) 40Vrms between +OUT and -OUT pins.  
 (2) Includes linearity, hysteresis, and repeatability.  
 (3) Refer to timing diagram in user manual.