

LDM485

Fully-isolated RS-232/485 Converters



DESCRIPTION

The LDM485 is a compact RS-232 to RS-485 converter which features a complete electrical isolation barrier and heavy-duty electrical-surge protectors. These devices feature a rugged aluminum enclosure small enough to mount on the back panel of typical computer equipment, saving valuable desk and floor space. Isolation is provided by optical couplers and a DC-to-DC converter. The RS-232 connection is through male or female EIA 25-pin connectors. The RS-485 connections are made through convenient solderless screw terminals.

The LDM485 series is designed for full-duplex operation over two-wire pairs. Outputs are tri-state, allowing multidropping of up to 64 units. Hardware handshake is available over two separate wire pairs. Data rates are DC to 57.6k bits per second. Six diagnostic LED indicators are provided (see Figure below) for installation guidance and system troubleshooting. The RS-232 interface supports Request To Send, Clear To Send, Data Set Ready, Received Line Signal Detect, and Data Terminal Ready. A convenient null modem switch is provided for the data lines. Also, a line termination switch connects a line termination resistor and line bias resistors to the RS-485 receive lines. The RS-485 interface supports Request To Send and Clear To Send on separate wire pairs. The LDM485 may be used to convert two sets of send and receive channels by using RTS and CTS circuits as the second data channels. Data rates are the same. The units use 12VAC from a wall-mounted transformer to screw terminals 1 and 2 on the RS-485 connector. Alternately, they can use ± 12 VDC to pins 9 (+) and 10 (-) of the RS-232 connector.

FEATURES


- Complete Isolation with Optical Couplers and Power DC-to-DC Converter
- Industrial Surge Protection Devices
- Six LED Diagnostic Indicators
- 19.2kbps at 3 Miles (5km), 57.6kbps at 0.5 Miles (0.8 km)
- Request-to-send, Clear-to-send Handshake
- Tri-state Outputs for Multidrop Applications, Up to 64 Devices
- Selection of Connectors
- Wide Operating Temperature Range
- Solderless Screw Terminal Field Connections
- CE Compliant
- Manufactured per RoHS III Directive 2015/863

BENEFITS

- Extends Communication Distances
- Protects Sensitive Communication Ports
- Wide Power Supply Range

APPLICATIONS

- Factory Automation and Control
- HVAC Systems
- Building Automation

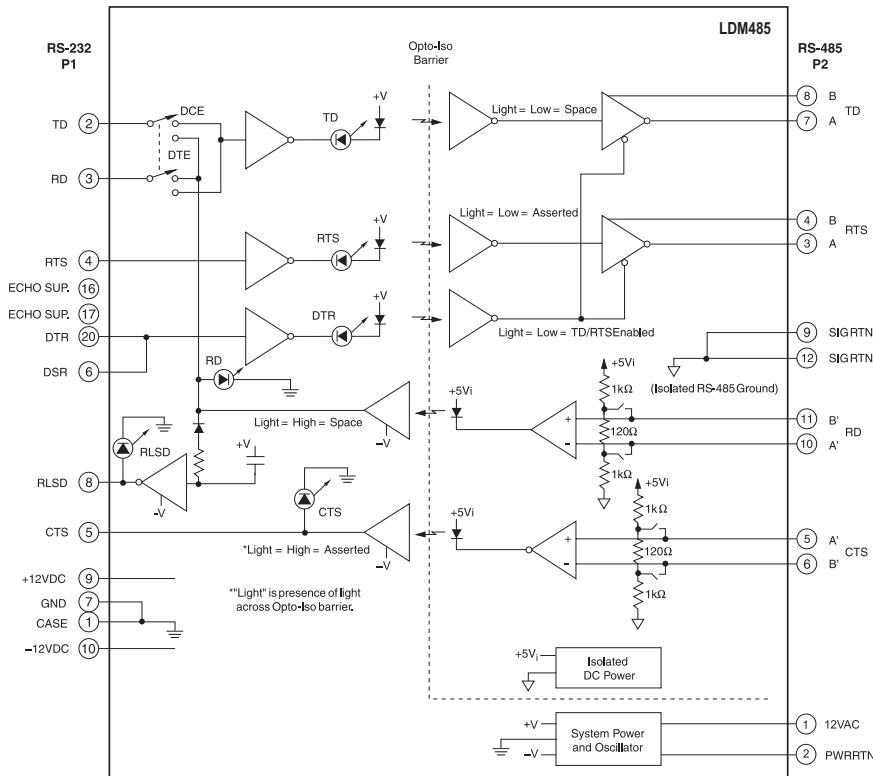

	A or A'	B or B'
TD, RD	Mark	Low
	Space	High
RTS, CTS	Asserted	High
	Not Asserted	Low

NOTE: Open or Tri-State on RD inputs produces a Mark state, and on CTS inputs produces an Asserted state.

TD, RD	Mark = +V, Space = -V
RTS, CTS, DTR, RLSD	Asserted = +V, Not Asserted = -V

LDM485 Block Diagram

Specifications Typical* at T_A = +25°C

Model	LDM485					
Bit Rate (bps)	0-57.6k					
bps vs Distance	57.6k	38.4k	19.2k	9.6k	4.8k	1.2k-0
Distance(miles) ⁽¹⁾	0.5	1.0	3.0	4.0	5.0	8.0
Distance(km)	0.8	1.6	4.8	6.4	8.1	12.9
Wire Capacitance	Equal to 25pf Per Foot and Up to 32 Multidrop Units					
Maximum Multidrop Units	64					
Common-Mode Isolation	Surge: 1500Vp, 1 Minute Continuous: 1000Vrms					
Differential-Mode Surge Protection (9 devices)	(AC input) ANSI/IEEE C37.90.1 (All RS-485 Inputs and Outputs)					
Modes	Asynchronous 4-wire Duplex, 2-wire Half-duplex, 2-wire Simplex					
Channel Lines ⁽²⁾	TD, RD, RTS, CTS					
Control Lines ⁽²⁾	RTS, CTS, DTR, DSR, RLSD					
Null Modem Switch	1 (Reverses RS-232 Pins 2 and 3)					
RS-485 Output Drive	60mA (max) Output					
RS-485 Input Impedance	12kΩ (min) Input					
Power						
AC operation ⁽³⁾	12VAC, ±10%, 10W Screw Terms 1 & 2					
DC operation	+11.5VDC to +17.0VDC at 500mA on Pin 9 -11.5VDC to -17.0VDC at 100mA on Pin 10					
Environmental:						
Operating Temperature Range	0°C to +70°C					
Storage Temperature Range	-40°C to +85°C					
Relative Humidity	0 to 95% Noncondensing					
Dimensions (h)x(w)x(d)	6.6" x 2.1" x 1.28" (167.6mm x 53.3mm x 32.5mm)					
Weight	7 oz (198g) (max)					
PT3	11.0 oz (312g) (max)					
MTTF ⁽⁴⁾	>100,000 Hrs					

NOTES:

*Contact factory or your local Dataforth sales office for maximum values.

(1) Distances reduced if multidropping more than 32 units; by 30% for 33-48 units; 50% for 49-64.

(2) TD = Transmit Data, RD = Receive Data, RTS = Request To Send, CTS = Clear To Send, DTR = Data Terminal Ready, DSR = Data Set Ready, RLSD = Received Line Signal Detect.

(3) 120VAC and 220VAC power transformers are available.

(4) Ground-benign environmental conditions (no salt atmosphere, <50°C ambient temperature).

Ordering Information


Model	Description
LDM485-P*	Male RS-232 Connector
LDM485-S	Female RS-232 Connector
LDM485-PE	Male RS-232 Connector, European Power Transformer

*Last Time Buy

Model	Description
PT3	U.S. Style Wall Mount Transformer, 120VAC

RS-232 Pin Descriptions			RS-485 P2 Pin Desc.	
Pin 1	CASE	Ground	Pin 1	12VAC
Pin 2	TD [3]	Transmit Data	Pin 2	PWR RTN
Pin 3	RD [2]	Receive Data	Pin 3	RTS A
Pin 4	RTS [7]	Request To Send	Pin 4	RTS B
Pin 5	CTS [8]	Clear To Send	Pin 5	CTS A'
Pin 6	DSR [6]	Data Set Ready (Connected to Data Terminal Ready)	Pin 6	CTS B'
Pin 7	GND [5]	Signal Ground	Pin 7	TD A
Pin 8	RLSD [1]	Receive Line Signal Detect	Pin 8	TD B
Pin 9	+12VDC	Positive DC Supply Input	Pin 9	SIG RTN
Pin 10	-12VDC	Negative DC Supply Input	Pin 10	RD A'
Pin 16	Echo Sup	Echo Suppression (tie to pin 17 to enable)	Pin 11	RD B'
Pin 17	Echo Sup	Echo Suppression (tie to pin 16 to enable)	Pin 12	SIG RTN
Pin 20	DTR [4]	Data Terminal Ready (Connected to Data Set Ready)		

Pin Numbers Given are for the 25-pin Connector with the 9-pin Equivalent in [].

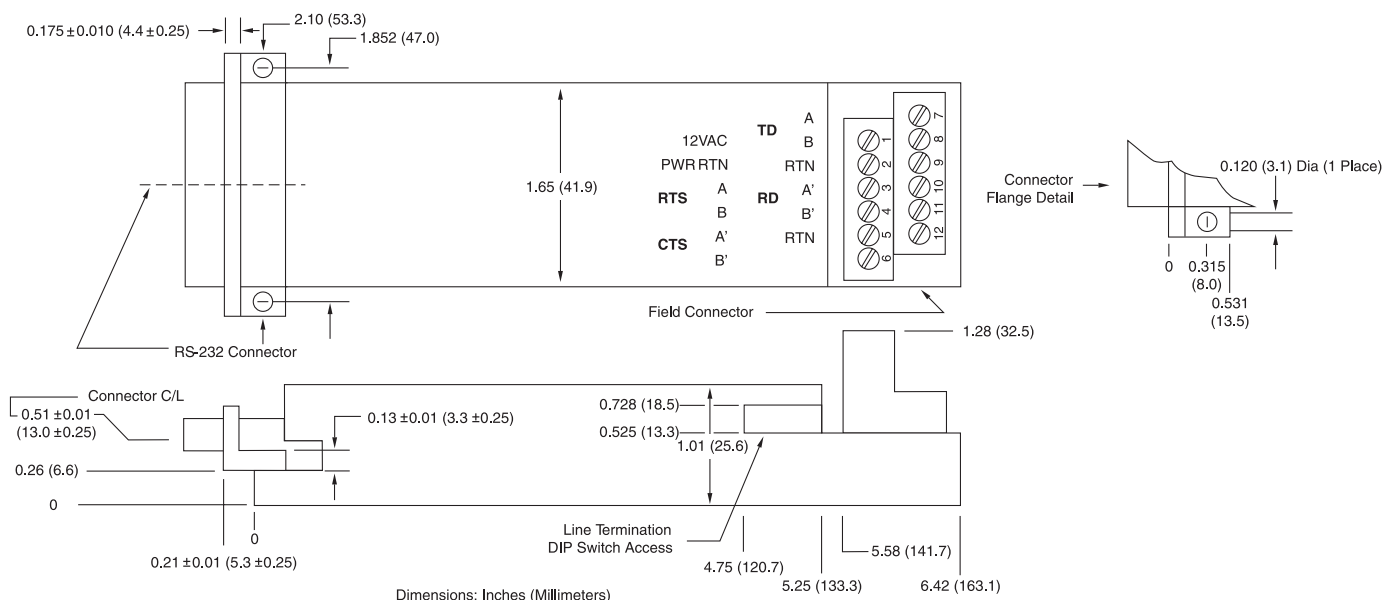

LDM485 Dimensions