



2024 Catalog SCM7B Products

Isolated Process Control
Signal Conditioning Products

Instrument Class®

Industrial Electronics



Celebrating



Instrument Class®
INNOVATION

Table of Contents

Quick Product Selection Guide.....	2-1
------------------------------------	-----

SCM7B Isolated Process Control Signal Conditioning Products

SCM7B Overview and Selection Guide	2-3
Analog Voltage-input Modules: SCM7B21/30/31	2-6
Bipolar Voltage-output Modules: SCM7B22	2-8
Process Current/Voltage-input Modules: SCM7B32/33.....	2-10
Linearized 2- or 3-wire RTD-input Modules: SCM7B34/34N.....	2-12
2-wire Transmitter-interface Modules with Loop Power: SCM7B35	2-14
Potentiometer-input Modules: SCM7B36	2-16
Non-linearized Thermocouple-input Modules: SCM7B37	2-18
Process Current-output Modules: SCM7B39	2-20
Analog Voltage-input Modules, Wide Bandwidth: SCM7B40/41	2-22
Linearized Thermocouple-input Modules: SCM7B47	2-24
SCM7B Module Dimensions and Pinouts.....	2-26

SCM7B Backpanels and Accessories.....	2-27
---------------------------------------	------

Online Technical Library	2-38
Discontinued Parts.....	2-40

The Company

"Our passion at Dataforth Corporation is designing, manufacturing, and marketing the best possible data acquisition and control, signal conditioning, and data communication products. Our mission is to set new standards of product quality, performance, and customer service." **Dataforth Corporation**, with 40 years of experience, is a worldwide leader in *Instrument Class® Industrial Electronics* – rugged, high-performance data acquisition and control, signal conditioning, and data communication products that play a vital role in maintaining the integrity of industrial automation, data acquisition, and quality assurance systems. Our products directly connect to most industrial sensors and protect valuable measurement and control signals and equipment from the dangerous and degrading effects of noise, transient power surges, internal ground loops, and other hazards.

Global Service and Support

Dataforth spans the globe with more than 50 International Distributors and US Representative Companies. Our customers benefit from a team of over 130 sales people highly trained in the application of precision products for industrial markets. In addition, we have a team of application engineers at our Tucson factory ready to solve any in-depth application questions, and we maintain ample inventory that allows small-quantity orders to be shipped from stock.

Research and Development Team

A professional staff of engineering and marketing personnel identify and develop products to satisfy our customers' most stringent requirements. Dataforth's design department specializes in innovative analog and isolation circuit development, high-performance mixed signal design, and software development, to ensure that our customers receive the highest performance products at an affordable price.

Automated Manufacturing and Test

Our products are manufactured in the USA on our state-of-the-art SMT systems to optimize time-to-ship and control costs. All products are tested multiple times, and many undergo a 48-hour burn-in at elevated temperatures to ensure performance and reliability.

Quality Control

Dataforth operates under the ISO9001:2015 quality management system. Since our products are used in critical industrial data acquisition, control, and test and measurement applications, we strive to produce the highest quality, premier performance products available on the market. Zero defects and complete customer satisfaction are our goals. To further strengthen our commitment to quality, Dataforth secures certifications such as UL, CSA, ATEX, and CE.

www.dataforth.com

Our website presents visitors with an intuitive, informative layout that quickly leads them to their areas of interest. A parametric search engine efficiently locates products by model number or functional description, and the ability to quickly access pricing information and place online orders. Fully detailed product data sheets and application and tech notes are available for download. Visitors can also view new product release data, sign up to receive our newsletters, get answers to technical questions, and quickly locate Distributors and Sales Representatives worldwide.

The Future

We fully understand that our ongoing success depends on satisfying our customers' requirements. Building upon our position as marketplace leader, Dataforth continues to seek out the most cost-effective emerging technologies in design and manufacturing in order to provide the highest performance quality products at an affordable price. By intelligently observing and responding to changing market needs, we ensure continuation of our critical customer partnerships.

©1984 - 2024 Dataforth Corporation. All Rights Reserved. ISO9001:2015-Registered QMS

The information in this catalog has been checked carefully and is believed to be accurate; however, Dataforth assumes no responsibility for possible inaccuracies or omissions. Specifications are subject to change without notice.

The information, tables, diagrams, and photographs contained herein are the property of Dataforth Corporation. No part of this catalog may be reproduced or distributed by any means, electronic, mechanical, or otherwise, for any purpose other than the purchaser's personal use, without the express written consent of Dataforth Corporation.

Instrument Class® is a registered trademark of Dataforth Corporation. *isoLynx®* is a registered trademark of Dataforth Corporation. *MAQ®20* is a registered trademark of Dataforth Corporation. *ReDAQ®* is a registered trademark of Dataforth Corporation. *SensorLex®* is a registered trademark of Dataforth Corporation.

LabVIEW™ is a trademark of National Instruments Corporation. *Microsoft Visual Studio®* is a registered trademark of Microsoft Corporation, Inc. *Modbus®* is a registered trademark of the Modbus Organization, Inc. *National Instruments Measurement Studio™* is a trademark of National Instruments Corporation.




Dataforth

- 2000+ Products for Industrial Data Acquisition and Control, Signal Conditioning, and Data Communications
- Energy Monitoring
- 40 Years of Experience
- Better than 6 σ Reliability
- Products Manufactured and Designed in the USA per RoHS III Directive (EU) 2015/863
- Quality Management System is ISO9001:2015 Registered

Additional Resources

- Application Notes
- Tech Notes
- Press and Product Releases

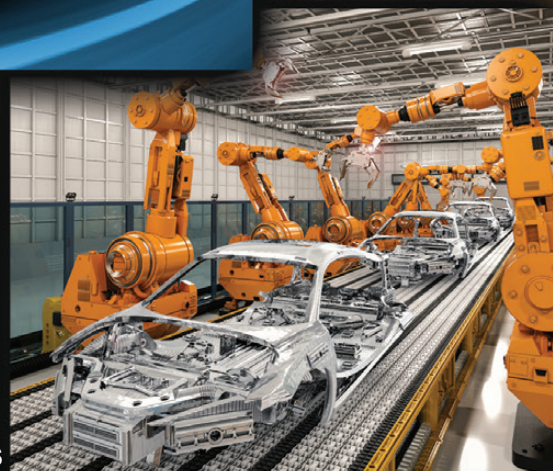

**Our Track Record
Proves We are
Dedicated to Your
Success!**

For Product Information, Certifications,
System Builders, and Online Ordering,
go to: www.dataforth.com

SCM5B Isolated Analog Signal Conditioning Modules

True 3-way Isolation, 5V Supply Voltage, Unparalleled Performance

20 family groups of 300+ different modules: a wide selection of input and output functions

Each SCM5B module provides a single channel of isolated analog input or output. Input modules interface to all types of industrial sensors. Analog inputs include voltage and current in narrow and wide bandwidths, thermocouple, RTD, accelerometer, potentiometer, strain gauge, frequency, and 2-wire and 3-wire, as well as 4-wire transmitter. Output modules accept a high-level analog voltage signal from a host system and provide process current or voltage output to field devices.

SCM5B Key Features

- $\pm 0.03\%$ Accuracy (typ)
- $\pm 0.005\%$ Linearity
- 1500Vrms Transformer Isolation and 240Vrms Field-side Protection
- ANSI/IEEE C37.90.1 Transient Protection
- 5V Power Supply Voltage (30mA (typ))
- 4- to 6-pole Low-pass Filtering
- Low Output Noise
- -40°C to $+85^{\circ}\text{C}$ Operating Temperature
- CSA C/US Certified, (Class I, Division 2, Groups A, B, C, D)
- CE and ATEX Compliant
- Manufactured per RoHS III Directive 2015/863



SCM7B Isolated Process Control Signal Conditioning Modules

2-way Isolation, 14-35VDC Supply Voltage, Industrial Performance

15 family groups of 200+ different modules: a compact, low-cost solution for industrial data acquisition and process control applications

Each SCM7B module provides a single channel of isolated analog input or output. Various input modules accept analog voltage or current signals from all types of field sensors and sources; they provide high-level analog outputs suitable for use in a process control system. Output modules accept high-level analog voltage signals from a process control system and provide current or voltage output to a field device.



SCM7B Key Features

- $\pm 0.03\%$ Accuracy (typ)
- $\pm 0.01\%$ Linearity
- 1500Vrms Transformer Isolation and 120Vrms Field-side Protection
- ANSI/IEEE C37.90.1 Transient Protection
- 14-35VDC Wide Supply Voltage
- 5-pole Low-pass Filtering
- Low Output Noise
- -40°C to $+85^{\circ}\text{C}$ Operating Temperature
- CSA C/US Certified (Class I, Division 2, Groups A, B, C, D)
- CE and ATEX Compliant
- Manufactured per RoHS III Directive 2015/863

The SCM5B, SCM7B product lines include a complete selection of backpanels, DIN-rail mounting options, cables, racks, power supplies, and other accessory items.

Custom SCM5B, SCM7B modules are available: consult factory for minimum quantity and pricing details on custom input ranges, output ranges, bandwidth, and other key parameters.

SensorLex® 8B Isolated Analog Signal Conditioning Modules


Miniature Size, 2-way Isolation, 5V Supply Voltage, *Instrument Class*® Performance

19 family groups of 130+ modules: an optimal solution for monitoring real-world process signals and providing high-level signals for data acquisition

Developed in response to customer requests for a smaller, isolated signal conditioner, SensorLex 8B modules are housed in a miniature package that is ideal for embedded and portable applications. All 8B modules are fully functional and provide *Instrument Class* analog voltage output. They interface to a wide variety of voltage, current, temperature, position, frequency, and strain measuring devices.

8B SensorLex Key Features

- $\pm 0.05\%$ Accuracy (typ)
- $\pm 0.02\%$ Linearity
- 1500Vrms Transformer Isolation and 240Vrms Field-side Protection
- ANSI/IEEE C37.90.1 Transient Protection
- 5V Power Supply Voltage (30mA (typ))
- 3- to 5-pole Low-pass Filtering
- Low Output Noise
- -40°C to $+85^{\circ}\text{C}$ Operating Temperature
- UL/cUL Listed (Class I, Division 2, Groups A, B, C, D)
- CE Compliant
- ATEX Compliance Pending
- Manufactured per RoHS III Directive 2015/863

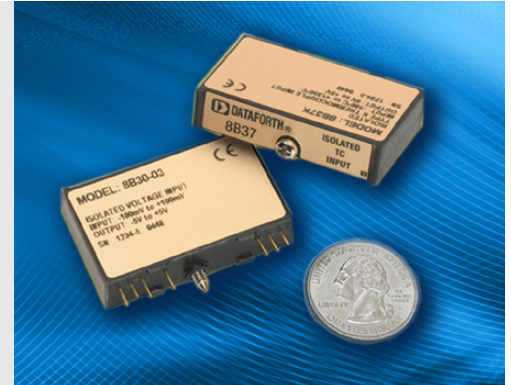

SCMD Isolated Digital I/O Modules


Miniature Digital I/O Modules with 4kV Isolation

A rugged, protective isolation barrier, effective to 4kV, between the field and computer system

SCMD miniature digital I/O modules are solid-state devices that send "On" and "Off" electrical signals to and from a computer. Input modules convert AC or DC voltages to DC logic signals and send them to the computer system. Output modules work in the opposite direction, switching either AC or DC circuits On or Off in response to logic-level voltage commands from the computer.

Key SCMD Features

- 4000Vrms Optical Isolation
- Industry Standard Packaging
- Input Modules Incorporate Input Filtering for Transient-free Switching
- Complete Selection of Backpanels and Accessories
- Optional Low-noise, Fast-switching Models
- UL Listed, CSA Certified, CE Compliant
- Manufactured per RoHS III Directive 2015/863

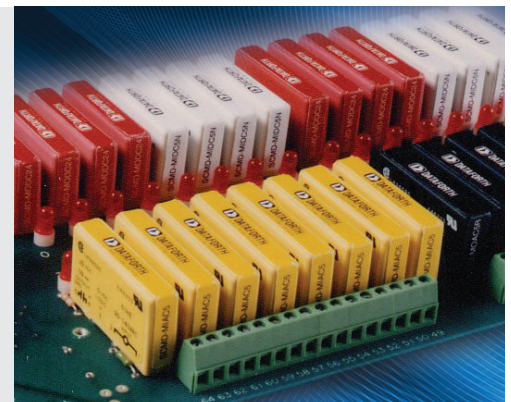

The SensorLex 8B and SCMD product lines include a complete selection of backpanels, DIN-rail mounting options, cables, racks, power supplies, and other accessory items.

Custom SensorLex 8B modules are available: consult factory for minimum quantity and pricing details on custom input ranges, output ranges, bandwidth, and other key parameters.

DSCA High-Performance, DIN-rail Mount, Isolated Signal Conditioners

True 3-way Isolation, High Accuracy, *Instrument Class®* Performance

16 family groups of 375+ different modules: a wide selection of input and output functions

Each *Instrument Class* DSCA module provides a single channel of isolated analog input or output for use in data acquisition, test and measurement, and control system applications.

DSCA Key Features

- $\pm 0.03\%$ Accuracy (typ)
- $\pm 0.01\%$ Linearity
- 1500Vrms Transformer Isolation and 240Vrms Field-side Protection
- ANSI/IEEE C37.90.1 Transient Protection
- 15-30VDC Wide Supply Range
- Industry Standard Outputs of 0-10V, ± 10 V, 0-20mA, or 4-20mA
- 4- to 6-pole Low-pass Filtering
- Low Output Noise
- -40°C to $+80^{\circ}\text{C}$ Operating Temperature
- Plug-in Terminal Blocks Simplify Wiring
- UL/cUL Listed (Class I, Division 2, Groups A, B, C, D)
- CE and ATEX Compliant
- Manufactured per RoHS III Directive 2015/863



SCM9B Isolated Analog Signal Conditioning Modules

Isolated, Intelligent Signal Conditioning Products

11 family groups of 200+ different modules: a wide selection of input and output functions

High-quality 9B modules provide cost-effective protection and conditioning for a wide range of distributed data acquisition and control applications including but not limited to process monitoring and control, remote data logging, product testing, and motion and motor speed control.

Dataforth's extensive line includes fixed and programmable sensor-to-computer and computer-to-analog output interface modules, RS-232/RS-485 converters, RS-485 repeaters, and applications software. Accessories include a complete selection of backpanels, DIN-rail mounting options, interface cables, mounting racks, power supplies, and other accessory items.

SCM9B Key Features

SCM9B Sensor-to-Computer Modules

- 500Vrms Input Isolation
- Programmable Scaling and Linearization
- ASCII Command/Response Protocol
- 15-bit Measurement Resolution
- Continuous Self-calibration
- Analog Readback
- DIN-rail Mountable D100 Series

SCM9B Computer-to-Analog Output Modules

- 0-1V, ± 1 V, 0-5V, ± 5 V, 0-10V, ± 10 V, 0-20mA, 4-20mA Output Ranges
- 500Vrms Output Isolation
- 12-bit Output Resolution
- Programmable 0.01V/s (mA/s) to 10,000V/s (mA/s) Output Slopes
- Analog Readback
- Data Scaling

SCM9B Converters and Repeater

- Transparent to Host
- Optically Isolated Bidirectional Data Flows
- Automatic Internal RS-485 Bus Supervision
- DIN-rail Mountable D192 Model



Custom DSCA modules are available: consult factory for minimum quantity and pricing details on custom input ranges, output ranges, bandwidth, and other key parameters.

DSCL Industrial Loop Isolators and Transmitters

Passive, Active, Programmable 4-20mA Loop Products

Loop and universal AC/DC-powered isolators and transmitters in DIN-rail, component, and head-mount packages

This family includes basic loop-powered isolators, wide-range AC/DC-powered isolators and transmitters, and fixed-gain or hardware- and software-configurable models. They accept voltage, current, thermocouple, and RTD-input signals and provide high-level analog outputs for data acquisition, test and measurement, and control system applications.

Key DSCL Features

- Full Family of Loop Isolators and Transmitters
- Signal-powered Passive Loop Isolator Models
- Wide Range 24-60V or 85-230V AC/DC Powered Models
- Jumper and Software Configurable Models
- 4000Vrms Isolation
- PCB, DIN-rail, Panel Mount, or Instrument Head Mounting
- Multiple Channels per Package Available
- No Recalibration or Maintenance Required
- Fault Detection of Input Signal Available
- CE Compliant
- Manufactured per RoHS III Directive 2015/863

Compact 6.2mm Signal Converters

- Ideal for Applications in Limited Space
- Dip-switch Configuration
- 3 Power Supply Options
- 3.67" x 0.24" x 4.04"
(93.1mm x 6.2mm x 102.5mm) casing
- 1.6 oz (45g) Per Module



DSCP User-Programmable Transmitters

Passive, Active, Programmable 4-20mA Loop Products

Loop and universal AC/DC-powered isolators and transmitters in DIN-rail, component, and head-mount packages

This family includes basic loop-powered isolators, wide-range AC/DC-powered isolators and transmitters, and fixed-gain or hardware and software configurable models. They accept voltage, current, thermocouple, and RTD-input signals and provide high-level analog outputs for data acquisition, test and measurement, and control system applications. The compact 6.2mm DSCP dip-switch configurable signal converters are ideal when space is limited.

Key DSCP Features

- Full Family of Loop Isolators and Transmitters
- Signal-powered Passive Loop Isolator Models
- Wide Range 24-60V or 85-230V AC/DC Powered Models
- Jumper and Software Configurable Models
- 4000Vrms Isolation
- PCB, DIN-rail, Panel Mount, or Instrument Head Mounting
- Multiple Channels per Package Available
- No Recalibration or Maintenance Required
- Fault Detection of Input Signal Available
- CE Compliant
- Manufactured per RoHS III Directive 2015/863

Compact 6.2mm Signal Converters

- Ideal for Applications in Limited Space
- Dip-switch Configuration
- 3 Power Supply Options
- 3.67" x 0.24" x 4.04"
(93.1mm x 6.2mm x 102.5mm) casing
- 1.6 oz (45g) Per Module



DSCT Loop-Powered Isolated Two-wire Transmitters

Instrument Class® Performance in a Low-Cost DIN-rail Mount Package

7 family groups of 45+ transmitter models: economical connections between sensors and control rooms

DSCT 2-wire transmitters condition and send analog signals from sensors located in the field to monitoring and control equipment—usually computers—located thousands of feet away in central control areas. The transmitters accept a wide range of inputs, including millivolt, volt, milliamp, thermocouple, RTD, potentiometer, and slide wire. They operate on power from a 2-wire signal loop and modulate the supply current to represent the input signal within a 4-20mA range.

Key DSCT Features

- $\pm 0.03\%$ Accuracy (typ)
- $\pm 0.01\%$ Linearity
- 1500Vrms Transformer Isolation and 240Vrms Field-side Protection
- ANSI/IEEE C37.90.1 Transient Protection
- 10.8-60V Wide Loop Supply Voltage
- 5-pole Low-pass Filtering
- -40°C to $+80^{\circ}\text{C}$ Operating Temperature
- Mounts on DIN-rail EN 50022, 35x7.5 or 35x15
- CSA C/US Certified (Class I, Division 2, Groups A, B, C, D)
- CE Compliant
- Manufactured per RoHS III Directive 2015/863



DCP and LDM Industrial Data Communication Products

Line Drivers and Converters for RS-232, RS-422, and RS-485 Systems

9 family groups of 40+ transmitter models: economical connections between sensors and control rooms

Industrial LANs and data communication systems stretch over long distances, inside and outside, with signals exposed to electrical transients, noise, ground loops, power surges, and lightning. Our heavy duty products “harden” and protect these systems.

Key Data Communication Features

- Protects Equipment from Damage due to Power Surges, Transients, Lightning
- 1500Vrms Isolation with Optocouplers and Power DC-to-DC Converter (3000Vp, 1 min)
- Extends RS-232 Communication Distances without Expensive Low-capacitance Cabling
- Connects RS-232 Devices to RS-422 and RS-485 Devices
- Data Rates to 115.2kbps
- Distances to 12 Miles (20km)
- 2- or 4-wire Simplex/Duplex Connection
- CE Compliant
- Manufactured per RoHS III Directive 2015/863



SCM5B isoLynx® SLX200 Data Acquisition System


Fast, Intelligent, Modular, Fully Isolated

Implements industry-standard Modbus® RTU and TCP protocols, enabling communication with existing third-party software drivers and HMI/SCADA packages

Fully certified by Modbus-IDA and OPC compatible, the SCM5B isoLynx SLX200 provides superior reliability, accuracy, and isolation for a wide range of rugged industrial applications. The system offers maximum flexibility of analog and digital I/O selection; the modular design combines a 6- or 12-channel I/O Controller base system and optional 8- or 16-channel expansion backplanes, which can be panel or DIN-rail mounted. One I/O controller unit can operate up to 60 channels of differential analog I/O and 128 channels of digital I/O, using Dataforth's SCM5B analog and SCMD digital modules. All I/O is channel-to-channel and input-to-output isolated.

SCM5B isoLynx SLX200 Key Features

- Modbus RTU Support on RS-232 and RS-485
- Modbus TCP Support (optional)
- 1500Vrms Input-to-Output and Channel-to-Channel Isolation
- 240Vrms Field-side Protection
- Dual Ethernet for Redundancy
- System Expansion to 60 Analog Channels and 128 Discrete Channels
- All I/O Mix and Match Isolated
- Fast 16-Bit A/D, D/A
- Best I/O Selection with 250+ Different I/O Modules
- Drop-in Data Acquisition for Existing Installations
- Two Analog Scan Modes
- -40°C to +85°C Operating Temperature
- Free Configuration Software
- CSA C/US Certified (Class I, Division 2, Groups A, B, C, D)
- CE Compliant
- Manufactured per RoHS III Directive 2015/863

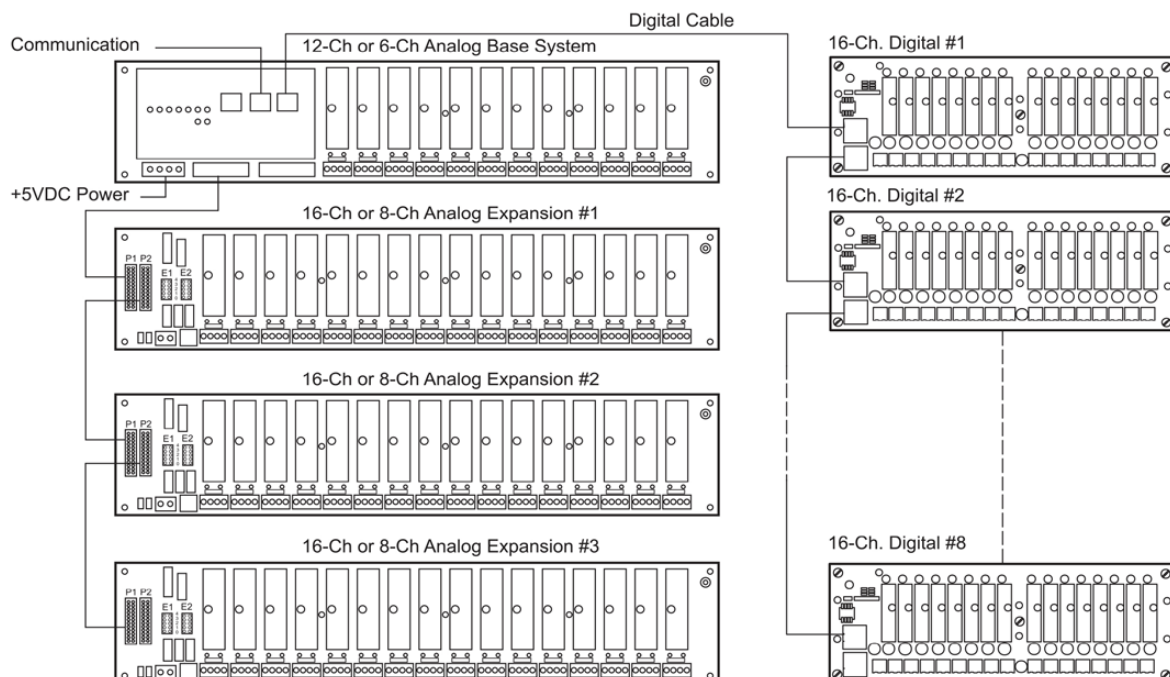

SCM5B isoLynx SLX200 System Example

8B isoLynx® SLX300 Data Acquisition System


Flexible, Compact, Modular, Reliable

Configure with up to 12 isolated analog-input channels, 4 isolated analog-output channels, and 8 isolated digital I/O channels

Building on the proven reliability and outstanding performance of the SCM5B isoLynx SLX200 and miniature-sized SensorLex® 8B isolated signal conditioning modules, the 8B isoLynx SLX300 is a compact, low-cost solution for wide ranging rugged industrial applications. The system enables the mix and match of analog and digital I/Os at sustained rates of up to 3.0kS/s (100kS/s burst) and supports Modbus® RTU and TCP protocols. The SLX300 also offers 7 advanced special functions and 4 alarm states. The system can be panel or DIN-rail mounted.

8B isoLynx SLX300 Key Features


- Modbus RTU and TCP Support
- 1500Vrms Input-to-Output and Channel-to-Channel Isolation
- 240Vrms Field-side Protection
- Wide I/O Selection
 - Analog – 19 product families, 130+ models
 - Digital – 6 product families, 20+ models
- Mix and Match Analog and Digital I/O
- Advanced Features Including Alarms, Counters, Timers, PWMs, and more
- –40°C to +85°C Operating Temperature
- Free Configuration Software
- UL/cUL Listed (Class I, Division 2, Groups A, B, C, D)
- CE Compliant
- ATEX Compliance Pending
- Manufactured per RoHS III Directive 2015/863

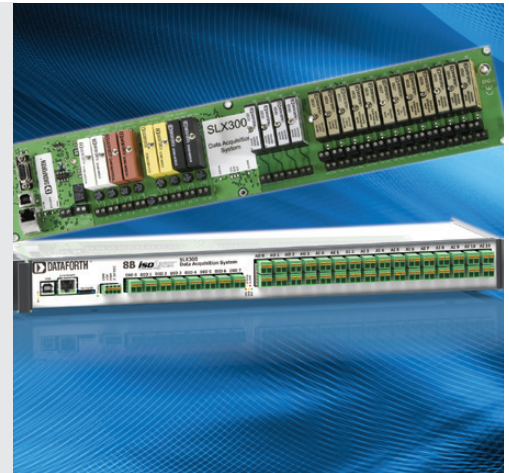

ReDAQ® Shape Software for SLX300

Out-of-the-box DAQ software for the 8B isoLynx SLX300 data acquisition system

ReDAQ Shape software for SLX300 provides the easiest and most efficient development tool to create, save, and open graphical user interface projects for test, process, data collection and data analysis applications. Built-in functions in the software are pre-configured and can be used without setup; just three easy steps are required to create data acquisition and control projects.

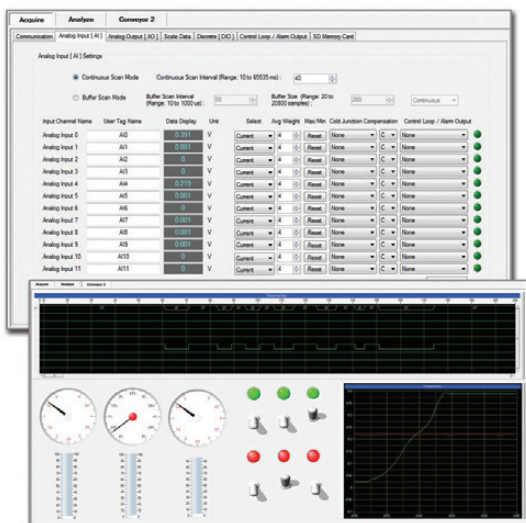

ReDAQ Shape for SLX300 Key Features

- 64 High-quality Toolbox Tools
 - 3 Easy Steps to Create Data Acquisition and Control Projects
 - Pre-configured Built-in Software Functions
 - Supports Any Graphical File Format
 - Integrated, Across-the-Board Applicability
 - Most Effective Way to Set Up and Configure 8B isoLynx SLX300
 - 8 Discrete I/O with 7 Special Functions
 - Pulse/Frequency Counter, Pulse/Frequency Counter with De-Bounce, Waveform Measurement, Time Between Events, Frequency Generator, PWM Generator, One-shot Pulse Generator
 - Customer User Tag Name for Any Input and Output
 - Cold Junction Compensation and Linearization for Thermocouple-input Modules
 - Control Loop and Alarm Output
 - Three-function Timer (Count-down, 24hr/ay, Day/Time) with 10 Programmable Events
- Functions:**
- Continuous and Burst Scan Modes for 12 Analog Input and 4 Analog Output Channels
 - Automatically Scales Data from Counts to Engineering Units

MAQ[®]20 Industrial Data Acquisition and Control System

High Performance, Powerful, Flexible, Industrial, Rugged Design

The industry's lowest cost-per-channel Data Acquisition and Control System offering, integral PID loop control, $\pm 0.035\%$ system accuracy; ideal for test and measurement, factory, process, and machine automation, military and aerospace, power and energy, environmental monitoring, and oil and gas applications

Encompassing more than 35 years of design excellence and quality in the industrial test and measurement and control industry, the MAQ20 family consists of DIN-rail mounted, programmable, multi-channel, rugged industrial signal conditioning input and output modules and communication modules. Each I/O module has a 1500Vrms isolation barrier between field-side and system-side wiring, and many models offer per-channel isolation. The MAQ20 is supported by both ReDAQ[®] Shape software for MAQ20 and your own ModBus[®] compatible data acquisition/test and measurement software.

MAQ20 Key Features

- Industry's Lowest Cost per Channel
- $\pm 0.035\%$ Accuracy (typ)
- 1500Vrms Channel-to-Bus Isolation
- Up to 240Vrms, Continuous Field I/O Protection
- ANSI/IEEE C37.90.1 Transient Protection
- Graphical Control Software
 - ReDAQ Shape for MAQ20 Software
 - Customer own ModBus[®] compatible DAQ Software
- Advanced Features Including Integral PID Control, Alarms, Counters, Timers, PWMs
- 7-34VDC Wide-range Input Power
- -40°C to $+85^{\circ}\text{C}$ Industrial Operating Temperature
- Heavy Industrial CE Compliant
- UL/cUL Listed (Class I, Division 2, Groups A, B, C, D)
- ATEX Compliance Pending
- Manufactured per RoHS III Directive 2015/863




PID Loop Control

This highly effective controller operates in ReDAQ Shape for MAQ20 software

With ReDAQ Shape software, the MAQ20 Data Acquisition System runs in real time and provides up to 8 loops of PID control; faceplates within the software enable an engineer or operator to interact with the MAQ20 Data Acquisition System. Typical PID applications include steam, water, and chemical flow control; tank level control, heat-exchanger/reactor temperature control, and pressure control.

Key PID Controller Features... with ReDAQ Shape Software

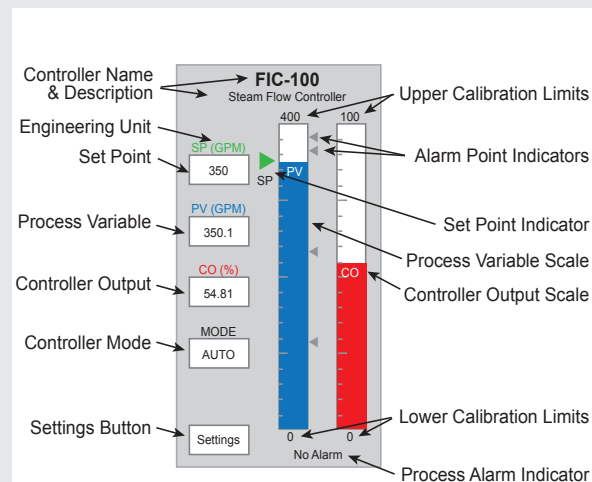

PID Faceplate in ReDAQ Shape Software

- Separate Panels for Setting Basic, Advanced, and Alarm Items
- Noninteracting and Parallel PID Control Algorithms
- Proportional and Derivative Modes Can Act on Error or Process Variable
- Gap Control
- Built-in Process Variable Filtering
- Bumpless Transfer
- Change Tuning Settings Easily
- Process Variable Set Point Tracking
- Limit Controller Output Range
- Anti-reset Windup
- Four Process Alarms
- Full-featured Faceplate for Numeric and Visual Feedback
- Integrated Auto Tuner


ReDAQ® Shape Software for MAQ20®20

Ideal for data acquisition, monitoring and control; enables users to easily interact with the Dataforth MAQ20 Data Acquisition System

ReDAQ Shape software for MAQ20 is an easy and efficient development tool as well as an effective way to configure and customize MAQ20 functions for specific application requirements. Faceplates within the software enable an engineer or operator to interact with the MAQ20 Data Acquisition System and its features, for example PID Loop Control.

ReDAQ Shape for MAQ20 Key Features

- 3 Easy Steps to Create Customized Presentation Panels
 - No Setup or Configuration Required to Acquire and Analyze Data
 - Faceplates for PID Loop Control
 - 65 High-quality Toolbox Tools
 - Supports Any Graphical File Format
 - Integrated, Across-the-board Applicability
- Most Efficient Way to Configure and Run MAQ20 Systems:
 - Continuous Acquisition and Burst Scan Modes
 - Automatically Scales Data from Counts to Engineering Units
 - Discrete I/O Offers 7 Special Functions: Pulse/Frequency Counter, Pulse/Frequency Counter with De-Bounce, Waveform Measurement, Time Between Events, Frequency Generator, PWM Generator, One-Shot Pulse Generator
 - Assign Tag Names for Any Input and Output
 - Configure Control Loops and Alarm Outputs
 - Three Function Timer (Count-Down, 24hr/Day, Day/Time) with 10 Programmable Events

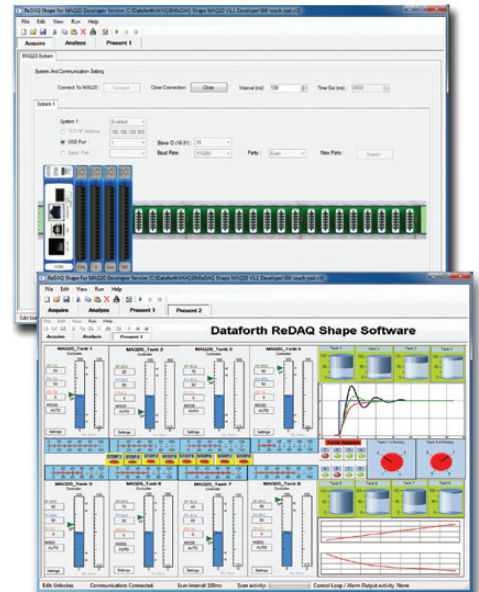

The Dataforth System Builder


Dataforth's System Builder is an innovative, interactive online tool that allows you to create your own system, module by module. Based on your stated requirements and parameters, suggestions are automatically given on which products to choose to build the most effective system. Pricing information is continuously updated, thereby enabling you to obtain the best system for your needs at the most cost-effective price.

Visit Dataforth's Website:

dataforth.com

Dataforth's website is an easy-to-use, comprehensive source for sales, products, and applications information. The site includes:

- Fast, accurate parametric search capabilities for all Dataforth industrial signal conditioning, data acquisition, and data communication products
- Online product quote and purchase
- Online product data sheets, application notes, and user manuals
- Direct applications assistance, sales, and customer service help lines readily available
- Latest news on company operations and new products
- Comprehensive signal conditioning, data acquisition, and control tutorials
- Worldwide corporate and sales contact information

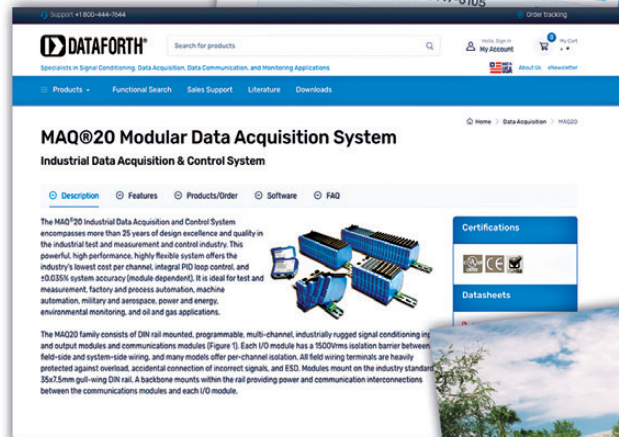

Online Help Online Ordering Data Sheets Application Notes Product Information



SCM5B, SCM7B, 8B, SCM9B

Characteristic	SCM5B	SCM7B	8B	SCM9B
Mechanical Format	Modular Plug-in-board	Modular Plug-in-board	Modular Plug-in-board	Plug-in or Hockey Puck
Isolation: Voltage type	1500Vrms Transformer 3-way	1500Vrms Transformer 2-way	1500Vrms Transformer 2-way	500Vrms Transformer/Optical 2-way
CMR	160dB	110dB	100dB	100dB
NMR (60Hz) Rejection	95dB (4Hz Modules)	85dB (3Hz Modules)	70dB	Software Configurable
Bandwidth	4Hz to 10kHz	3Hz to 10kHz	3Hz to 20kHz	Software Configurable
Filter	6-pole	5-pole	3- to 5-pole	Digital
Input Voltage Withstand	240Vrms	120Vrms	240Vrms	120Vrms or 250Vrms
Input Signals	(1)	(2)	(1)	(3)
Output Range to System	0-5VDC, 0-10VDC, ± 5 VDC, ± 10 VDC, 0-1mA, 0-20mA, 4-20mA	1-5VDC, 0-5VDC, 0-10VDC, ± 10 VDC	0-5VDC, ± 5 VDC	RS-232 or RS-485
Output Range to Field	4-20mA, 0-20mA, ± 20 mA, ± 5 VDC, ± 10 VDC, 0-5VDC, 0-10VDC	± 10 VDC, 4-20mA, 0-20mA	4-20mA, 0-20mA, ± 20 mA, ± 5 VDC, ± 10 VDC, 0-5VDC, 0-10VDC	4-20mA, 0-20mA, 0-1VDC, ± 1 VDC, 0-5VDC, ± 5 VDC, 0-10VDC, ± 10 VDC
Gain/Offset Adjust	Fixed	Fixed	Fixed	Auto Zero, Auto Cal
Accuracy	0.03% (typ)	0.03% (typ)	0.05% (typ)	0.02% (typ)
Output Control	Enable/Disable	Always Enabled	Always Enabled	RS-232 or RS-485
Supply Voltage	+5VDC $\pm 5\%$ at 30-350mA	14-35VDC (+24V Nom) at 12-70mA	+5VDC $\pm 5\%$ at 25-225mA	12-30VDC at 0.75W Max
Dimensions (h)x(w)x(d)	2.28" x 2.26" x 0.6" (58mm x 57mm x 15mm)	2.13" x 1.7" x 0.6" (54.1mm x 43.3mm x 15.4mm)	1.11" x 1.65" x 0.4" (28.1mm x 41.9mm x 10.2mm)	3.60" x 2.45" x 1.10" (91.4mm x 62.2mm x 27.9mm)
Interface	14-pin	5- or 6-pin	5-, 6- or 7-pin	10- or 20-pos Term Block
Customization	Yes	Yes	Yes	No

DIN-rail, Head-mount Products - DSCA, DSCT, DSCL, DSCP

Characteristic	DSCA	DSCT	DSCL	DSCP
Mechanical Format	DIN-rail Mount	DIN-rail Mount	DIN-rail, Component, Panel	DIN-rail, Head Mount
Isolation: Voltage type	1500Vrms Transformer 3-way	1500Vrms Transformer 3-way	500Vrms to 4000Vrms Transformer/Optical	Non/1500Vrms/2300Vrms Transformer/Optical 3-way
CMR	160dB	160dB	70-110dB	Consult Data Sheet
NMR (60Hz) Rejection	85dB (3Hz Modules)	85dB (3Hz XMTRs)	20dB/Decade	SW or Dip-switch Config
Bandwidth	3Hz to 3kHz	3Hz	5Hz to 750Hz	SW or Dip-switch Config
Filter	6-pole	6-pole	2-pole	SW or Dip-switch Config
Input Voltage Withstand	240Vrms	240Vrms	N/A	N/A
Input Signals	(1)	(5)	4-20mA, 0-20mA	(4)
Output Range to System	0-10VDC, ± 10 VDC, 0-1mA, 4-20mA, 0-20mA	4-20mA	4-20mA, 0-20mA, V, and Selectable	SW or Dip-switch Config
Output Range to Field	4-20mA, 0-20mA, ± 20 mA, ± 10 VDC, 0-10VDC	N/A	N/A	N/A
Gain/Offset Adjust	$\pm 5\%$	$\pm 10\%$	$\pm 10\%$ on Some Models	Software Configurable
Accuracy	0.03% (typ)	0.03% (typ)	0.05% to 0.1% (typ)	0.1% (typ)
Output Control	Always Enabled	Always Enabled	Always Enabled	Always Enabled
Supply Voltage	15-30VDC (+24V Nom) at 25-80mA	10.8-100VDC Loop at 4-20mA	24VDC Loop at 4-20mA	24VDC Loop, or 24-230VDC/VAC
Dimensions (h)x(w)x(d)	2.95" x 0.89" x 4.13" (75mm x 22.5mm x 105mm)	2.95" x 0.89" x 4.13" (75mm x 22.5mm x 105mm)	Consult Data Sheet	Consult Data Sheet
Interface	8-pos Term Block	6-pos Term Block	Terminal Block	Terminal Block
Customization	Yes	Yes	No	SW or Dip-switch Config

NOTES:

(1) V, I, RTD, TC, Potentiometer, Strain, True RMS, 2-wire, Frequency (3) V, I, RTD, TC, Frequency, Digital I/O (5) V, I, RTD, TC, Potentiometer
(2) V, I, RTD, TC, Potentiometer, 2-wire (4) V, I, RTD, TC

High-accuracy Energy Monitoring Module

Module	PWRM10-01	PWRM20-01
Phase Voltage Range	85-265VAC	85-525VAC
Phase Frequency	50/60Hz Input	
Electrical System		
	Single-phase (2-wire)	
Voltage Measurement	Two-phase (3-wire)	
(Direct Connection or VT)	Three-phase Wye or Delta (3-wire)	
	Three-phase Wye or Delta (4-wire)	
Current Measurement	Shunt, Ct, Rogowski Coil	
Measured Parameters and Accuracy		
RMS Voltage	±0.1% of Full-scale Range	
RMS Current	±0.1% of Full-scale Range	
Active Power	±0.2%	
Apparent Power	±0.2%	
Reactive Power	±0.2%	
Power Factor	±0.2%	
Frequency Range	45-65Hz	
Active Energy	±0.25%	
Apparent Energy	±0.25%	
Fundamental Active and Reactive Energy	±0.25%	
Phase Angles	±0.1%	
Line Periods	±0.1%	
Measurement Bandwidth		
RMS Voltage and Current (−3dB)		
Total Active Energy (−3dB)	3.3kHz	
Fundamental Reactive Energy (−3dB)	3.3kHz	
Harmonic (−3dB)	3.3kHz (2.8kHz No Attenuation Pass Band)	
Temperature Drift	±100ppm°C	
Events	Over-voltage, Over-current, Sag	
Security	Password to Access Control	
Data Logging	Configurable, Automatic Download and Storage	
Connectivity	Ethernet, TCP/IP	
Mounting	DIN-rail	
Dimensions (h)x(w)x(d)	4.01" x 0.89" x 5.04" (102mm x 22.6mm x 128mm)	

Data Acquisition (DAQ) System - MAQ20

Components - Communication - MAQ20-COM2, -COM4	
Standard Industrial Buses	Ethernet, RS-232, RS-485
USB Software Interfaces	Modbus TPC/IP or RTU
Components - Analog Input - MAQ20-MVDN, -VDN, -VSN, -IDN, -ISN, -FREQ, -BRDG1, -JTC, -KTC, -RSTC, -TTC, -RTD31, -RTD41, -ISO1, -ISOMV1, ISOV2, -ISOV2, -ISOV3, -ISOV4, -ISOV5	
Channel Count	Up to 16 Channels, Independently Configurable
Voltage and Current Inputs	8 Differential or 16 Single-ended
Thermocouple	8-channel Measurement, 5 Thermocouple Types
RTD Inputs	2-, 3-wire Sensors, Including 6 RTD Types and Potentiometers
Strain Gauge Input	Connect to Full-bridge Sensors, Narrow/Wide BW Filtering
Frequency-input	Zero Crossing and TTL Signals of 500Hz-100kHz Frequencies
Components - Analog Output - MAQ20-VO, -IO	
Voltage and Current Outputs	Up to 8 Channels of 300vrms Ch-to-Ch Isolated Output
Components - Discrete Input/Output - MAQ20-DIV20, -DIVC20, -DIOL, -DIOH, -DODC20SK, -DORLY20	
Channel Count	5 Input/5 Output Channels per Module
Inputs	3-60VDC-input; or, 90-280VAC/VDS at 3A
Outputs	3-60VDC-output; or, 24-280VAC at 3A
Overall System Specifications	
Accuracy	±0.035% (typ)
Voltage and Current Outputs	Up to 8 Channels of 300Vrms Ch-To-Ch Isolated Output
Field I/O Protection	Up to 240Vrms, Continuous
Transient Protection	ANSI/IEEE C.37.90.1
Wide-range Input Power	7-34VDC
ReDAQ Shape Software	Up to 8 PID Loops
Operating Temperature	–40°C to +85°C
Advanced PID Control	Alarms, Counters, Timers
Operating Temperature	–40°C to +85°C

High-voltage Attenuator Modules - SCMHVAS-Mxxxx

Module	SCMHVAS-Mxxx
Input Range	±100V _{PEAK} to ±2000V _{PEAK} (70VAC to 1414VAC)
Input Voltage (max)	±2000V _{PEAK}
Input Resistance	>10MΩ
Accuracy	±0.03%
Stability	±50ppm/°C
Output Range	±1V
Output Resistance	<100kΩ
Mechanical Dimensions	2.13" x 1.705" x 0.605"
(h)x(w)x(d)	(54.1mm x 43.3mm x 15.4mm)
Environmental	
Operating Temp. Range	–40°C to +85°C
Storage Temp. Range	–40°C to +85°C
Relative Humidity	0 to 95% Noncondensing

*Contact factory or you local Dataforth sales office for maximum values.

See Discontinued Devices at the End of the Document.

SCM7B



Isolated Process Control Signal Conditioning Products



SCM7B Modules

SCM7B Isolated Process Control Signal Conditioning modules include a complete selection of backpanels, DIN-rail mounting accessories, interface cables, and rack mounting hardware. Each SCM7B module provides a single channel of isolated analog input or output. Various input modules accept analog voltage or current signals from all types of field sensors and sources, filter, isolate, amplify, linearize, and convert these input signals to high-level analog outputs suitable for use in a process control system. Output modules accept high-level analog voltage signals from a process control system, then buffer, isolate, filter, and amplify before providing a current or voltage output to a field device.

Custom Signal Conditioning

Custom modules are available: consult factory for minimum quantity and pricing details on custom input ranges, output ranges, bandwidth, and other key parameters.

FEATURES

- $\pm 0.03\%$ Accuracy (typ)
- $\pm 0.01\%$ Linearity
- 1500Vrms Transformer Isolation and 120Vrms Field-side Protection
- ANSI/IEEE C37.90.1 Transient Protection
- 14 - 35VDC Wide Supply Voltage
- 5-Pole Low-pass Filtering
- Low Peak and RMS Noise
- Low Drift Input Circuitry for Long-term Stability
- Up to 160dB CMRR
- 85dB NMR at 60Hz, 80dB at 50Hz
- -40°C to $+85^{\circ}\text{C}$ Operating Temperature
- Backpanels Allow Use of Industry-standard Digital I/O, Solid-State Relay Modules
- DIN-rail Mounting
- CSA C/US Certified (Class I, Division 2, Groups A, B, C, D)
- CE and ATEX Compliant
- Manufactured per RoHS III Directive 2015/863

BENEFITS

- Small Form-factor for High-density Applications
- Protects User Equipment from Lightning and Heavy Equipment Power-line Voltage
- Reduces Electrical Noise in Measured Signals
- Convenient System Expansion and Repair
- Signal Filtering in Noisy Environments
- Simplifies Sensor Interface and Signal Conditioning Design
- Provides Isolation of External Sensors
- Breaks Ground Loops
- Reduces EMC Concerns

APPLICATIONS

- Analog Signal Conditioning
- Analog Signal Isolation
- Analog Signal Filtering
- Industrial Process Control
- Test and Measurement
- System and Signal Monitoring
- Temperature Measurement
- Torque Measurement
- Civil Engineering
- Geotechnical Monitoring

SCM7B Selection Guide

† OUTPUT RANGES AVAILABLE

Output Range	Part No. Suffix	Example
+1 to +5V	NONE	SCM7B30-01
0 to +5V	A	SCM7B30-01A
0 to +10V	D	SCM7B30-01D

‡ THERMOCOUPLE ALLOY COMBINATIONS

STANDARDS: DIN IEC 584, ANSI MC96-1-82, JIS C 1602-1981

Type	Material
J	Iron vs. Copper-Nickel
K	Nickel-Chromium vs. Nickel-Aluminum
T	Copper vs. Copper-Nickel
E	Nickel-Chromium vs. Copper-Nickel
R	Platinum-13% Rhodium vs. Platinum
S	Platinum-10% Rhodium vs. Platinum
B	Platinum-30% Rhodium vs. Platinum-6% Rhodium
C	Tungsten-5% Rhenium vs. Tungsten-26% Rhenium
N	Nickel-14.2% Chromium-1.4% Silicon vs. Nickel-4.4% Silicon-0.1% Magnesium

ISOLATED VOLTAGE-INPUT MODULES

MODEL	INPUT RANGE	OUTPUT RANGE
SCM7B21	±10V	±10V
SCM7B30-01	0 to +10mV	†
SCM7B30-02	0 to +100mV	†
SCM7B30-03	0 to +1V	†
SCM7B30-05	+1 to +5V	†
SCM7B30-06	±10mV	†
SCM7B30-07	±100mV	†
SCM7B30-08	±1V	†
SCM7B31-01	0 to +10V	†
SCM7B31-02	±5V	†
SCM7B31-03	±10V	†
SCM7B31-04	0 to +5V	†
SCM7B31-05	0 to +20V	†
SCM7B31-06	±20V	†
SCM7B31-07	0 to +50V	†
SCM7B31-08	±50V	†

ISOLATED BIPOLAR VOLTAGE-OUTPUT MODULES

MODEL	INPUT RANGE	OUTPUT RANGE
SCM7B22	±10V	±10V of Span

ISOLATED PROCESS CURRENT-INPUT MODULES

MODEL	INPUT RANGE	OUTPUT RANGE
SCM7B32-01	4-20mA	†
SCM7B32-02	0-20mA	†

ISOLATED PROCESS VOLTAGE-INPUT MODULES

MODEL	INPUT RANGE	OUTPUT RANGE
SCM7B33-01	+1 to +5V	†
SCM7B33-02	0 to +5V	†

ISOLATED LINEARIZED 100Ω Pt RTD-INPUTS MODULES**

MODEL	INPUT RANGE	OUTPUT RANGE
SCM7B34-01	-100°C to +100°C (-148°F to +212°F)	†
SCM7B34-02	0°C to +100°C (+32°F to +212°F)	†
SCM7B34-03	0°C to +200°C (+32°F to +392°F)	†
SCM7B34-04	0°C to +600°C (+32°F to +1112°F)	†
SCM7B34-05	-50°C to +350°C (-58°F to +662°F)	†

ISOLATED LINEARIZED 120Ω Ni RTD-INPUTS MODULES**

MODEL	INPUT RANGE	OUTPUT RANGE
SCM7B34N-01	0°C to +300°C (+32°F to +572°F)	†
SCM7B34N-02	0°C to +200°C (+32°F to +392°F)	†

ISOLATED 2-WIRE XMTR INTERFACE MODULES WITH LOOP POWER

MODEL	INPUT RANGE	OUTPUT RANGE
SCM7B35-01	4-20mA	†
SCM7B35-02	4-20mA	+2V to +10V

ISOLATED POTENTIOMETER-INPUT MODULES

MODEL	INPUT RANGE	OUTPUT RANGE
SCM7B36-01	0 to 100Ω	†
SCM7B36-02	0 to 200Ω	†
SCM7B36-03	0 to 500Ω	†
SCM7B36-04	0 to 1kΩ	†
SCM7B36-05	0 to 5kΩ	†
SCM7B36-06	0 to 10kΩ	†

ISOLATED THERMOCOUPLE-INPUT MODULES

MODEL	TYPE†	INPUT RANGE	OUTPUT RANGE
SCM7B37J-01	J	-100°C to +760°C (-148°F to +1400°F)	†
SCM7B37J-10	J	0°C to +200°C (+32°F to +392°F)	†
SCM7B37J-11	J	0°C to +400°C (+32°F to +752°F)	†
SCM7B37J-12	J	0°C to +600°C (+32°F to +1112°F)	†
SCM7B37J-13	J	+300°C to +600°C (+572°F to +1112°F)	†
SCM7B37K-02	K	-100°C to +1350°C (-148°F to +2462°F)	†
SCM7B37K-20	K	0°C to +300°C (+32°F to +572°F)	†
SCM7B37K-21	K	0°C to +600°C (+32°F to +1112°F)	†
SCM7B37K-22	K	0°C to +1200°C (+32°F to +2192°F)	†
SCM7B37K-23	K	+600°C to +1200°C (+1112°F to +2192°F)	†
SCM7B37T-03	T	-100°C to +400°C (-148°F to +752°F)	†
SCM7B37E-04	E	0°C to +900°C (+32°F to +1652°F)	†
SCM7B37R-05	R	0°C to +1750°C (+32°F to +3182°F)	†
SCM7B37S-06	S	0°C to +1750°C (+32°F to +3182°F)	†
SCM7B37B-07	B	0°C to +1800°C (+32°F to +3272°F)	†

ISOLATED PROCESS CURRENT-OUTPUT MODULES

MODEL	INPUT RANGE	OUTPUT RANGE
SCM7B39-01	+1V to +5V	4-20mA
SCM7B39-02	0 to +10V	0-20mA
SCM7B39-03	0 to +10V	4-20mA
SCM7B39-04	4-20mA	4-20mA

SCM7B Selection Guide (Continued)
ISOLATED VOLTAGE-INPUT MODULES, WIDE BANDWIDTH

MODEL	INPUT RANGE	OUTPUT RANGE
SCM7B40-02	0 to +100mV	†
SCM7B40-03	0 to +1V	†
SCM7B40-07	±100mV	†
SCM7B40-08	±1V	†
SCM7B41-01	0 to +10V	†
SCM7B41-02	±5V	†
SCM7B41-03	±10V	†
SCM7B41-04	0 to +5V	†
SCM7B41-05	0 to +20V	†
SCM7B41-06	0 to +40V	†

ISOLATED LINEARIZED THERMOCOUPLE-INPUT MODULES

MODEL	TYPE†	INPUT RANGE	OUTPUT RANGE
SCM7B47J-01	J	0°C to +760°C (+32°F to +1400°F)	†
SCM7B47J-02	J	-100°C to +300°C (-148°F to +572°F)	†
SCM7B47K-03	K	0°C to +1300°C (+32°F to +2372°F)	†
SCM7B47K-04	K	0°C to +600°C (+32°F to +1112°F)	†
SCM7B47T-05	T	0°C to +400°C (+32°F to +752°F)	†
SCM7B47T-06	T	-100°C to +200°C (-148°F to +392°F)	†
SCM7B47E-07	E	0°C to +900°C (+32°F to +1652°F)	†
SCM7B47R-08	R	+500°C to +1750°C (+932°F to +3182°F)	†
SCM7B47S-09	S	+700°C to +1750°C (+1292°F to +3182°F)	†
SCM7B47B-10	B	+800°C to +1800°C (+1472°F to +3272°F)	†
SCM7B47N-11	N	+200°C to +1300°C (+392°F to +2372°F)	†

† OUTPUT RANGES AVAILABLE

Output Range	Part No. Suffix	Example
+1 to +5V	NONE	SCM7B30-01
0 to +5V	A	SCM7B30-01A
0 to +10V	D	SCM7B30-01D

‡ THERMOCOUPLE ALLOY COMBINATIONS

STANDARDS: DIN IEC 584, ANSI MC96-1-82, JIS C 1602-1981

Type	Material
J	Iron vs. Copper-nickel
K	Nickel-chromium vs. Nickel-aluminum
T	Copper vs. Copper-nickel
E	Nickel-chromium vs. Copper-nickel
R	Platinum-13% Rhodium vs. Platinum
S	Platinum-10% Rhodium vs. Platinum
B	Platinum-30% Rhodium vs. Platinum-6% Rhodium
C	Tungsten-5% Rhenium vs. Tungsten-26% Rhenium
N	Nickel-14.2% Chromium-1.4% Silicon vs. Nickel-4.4% Silicon-0.1% Magnesium

****RTD STANDARDS**

Type	Alpha Coefficient	DIN	JIS	IEC
100Ω Pt	0.00385			
120Ω Ni	0.00672	DIN 43760	JIS C 1604-1989	IEC 751
10Ω Cu	0.004274			

ACCESSORIES

MODEL	DESCRIPTION
SCM7BXEV	1-channel Evaluation Backpanel
SCM7BP01	1-channel Backpanel
SCM7BP02	2-channel Backpanel
SCM7BP01-DIN	SCM7BP01 with DIN-rail Mounting Option
SCM7BP02-DIN	SCM7BP02 with DIN-rail Mounting Option
SCMXBEFE	DIN Base Element with Snap Foot
SCMXBE	DIN Base Element with Snap Foot
SCMXSE	DIN Side Elements
SCMXVS	DIN Connection Pins
SCMXRAIL1-XX	DIN EN 50022-35x7.5 (Slotted Steel), Length -XX in Meters
SCMXRAIL2-XX	DIN EN 50035-G32 (Slotted Steel), Length -XX in Meters
SCMXRAIL3-XX	DIN EN 50022-35x15 (Slotted Steel), Length -XX in Meters
SCM7BP04	4-channel Backpanel
SCM7BP04-DIN	SCM7BP04 with DIN-rail Mounting Option
SCM7BP08	8-channel Backpanel
SCM7BP08-DIN	SCM7BP08 with DIN-rail Mounting Option
SCM7BP16	16-channel Backpanel
SCM7BP16-DIN	SCM7BP16 with DIN-rail Mounting Option
SCMXRK-002	19" Rack for Mounting Backplanes
SCM7BXCA01	6" System Adapter Cable (DB25F to 26M)
SCM7BXCA02	3' System Adapter Cable (DB25F to DB25F)
SCMXCA004-XX	xx-Meter System Interface Cable (26F to 26F)
SCMXCA006-XX	System Interface Cable for Backpanels
8BXIF	DB25 to Screw Terminal Interface Board
SCM7BXR1	250Ω Current Conversion Resistor
SCM7BPT	Non-isolated Signal Pass thru Module
SCM7B-PROTO	Breadboard Kit

POWER SUPPLIES

PWR-PS5R7W	Power Supply, 24V, 0.3A, 100-240VAC-input
PWR-PS5R15W	Power Supply, 24V, 0.65A, 100-240VAC-input
PWR-PS5R30W	Power Supply, 24V, 1.3A, 100-240VAC-input
PWR-PS5R60W	Power Supply, 24V, 2.5A, 100-240VAC-input
PWR-PS5R120W	Power Supply, 24V, 5.0A, 100-240VAC-input

SCM7B21/30/31

Isolated Analog Voltage-input Modules



DESCRIPTION

Each SCM7B21/30/31 voltage input module accepts one channel of analog voltage input which is filtered, isolated, amplified, and converted to a high-level analog voltage for output to the process control system.

These modules incorporate a five-pole filtering approach to maximize both time and frequency response by taking advantage of both Thomson (Bessel) and Butterworth characteristics. One pole of the filter is on the field side of the isolation barrier; four are on the process control system side.

After the initial field-side filtering, the input signal is chopped by a proprietary chopper circuit and transferred across the transformer isolation barrier, suppressing transmission of common mode spikes and surges. The signal is then reconstructed and filtered for process control system output.

Modules accept a wide 14 - 35VDC power supply range (+24VDC nominal). Their compact packages (2.13"x1.705"x0.605") save space and are ideal for high channel density applications. They are designed for easy DIN-rail mounting using any of the -DIN backpanels.

FEATURES


- Accepts Millivolt and Voltage Level Signals
- Provides High-level Voltage-outputs
- 1500Vrms Transformer Isolation
- Accuracy, $\pm 0.03\%$ of Span (typ), $\pm 0.1\%$ (max)
- ANSI/IEEE C37.90.1 Transient Protection
- Input Protected to 120Vrms, Continuous
- Noise, 500 μ Vp-p (5MHz), 250 μ Vrms (100kHz)
- Up to 160dB CMRR
- 85dB NMR at 60Hz, 80dB at 50Hz
- Easy DIN-rail Mounting
- CSA C/US Certified
- CE and ATEX Compliant
- Manufactured per RoHS III Directive 2015/863

BENEFITS

- Small Form-factor for High-density Applications
- Protects User Equipment from Lightning and Heavy Equipment Power-line Voltage
- Reduces Electrical Noise in Measured Signals
- Convenient System Expansion and Repair
- Signal Filtering in Noisy Environments
- Simplifies Sensor Interface and Signal Conditioning Design
- Provides Isolation of External Sensors
- Breaks Ground Loops
- Reduces EMC Concerns

APPLICATIONS

- Analog Signal Conditioning
- Industrial Process Control
- Test and Measurement
- System and Signal Monitoring
- Temperature Measurement
- Torque Measurement
- Civil Engineering
- Geotechnical Monitoring

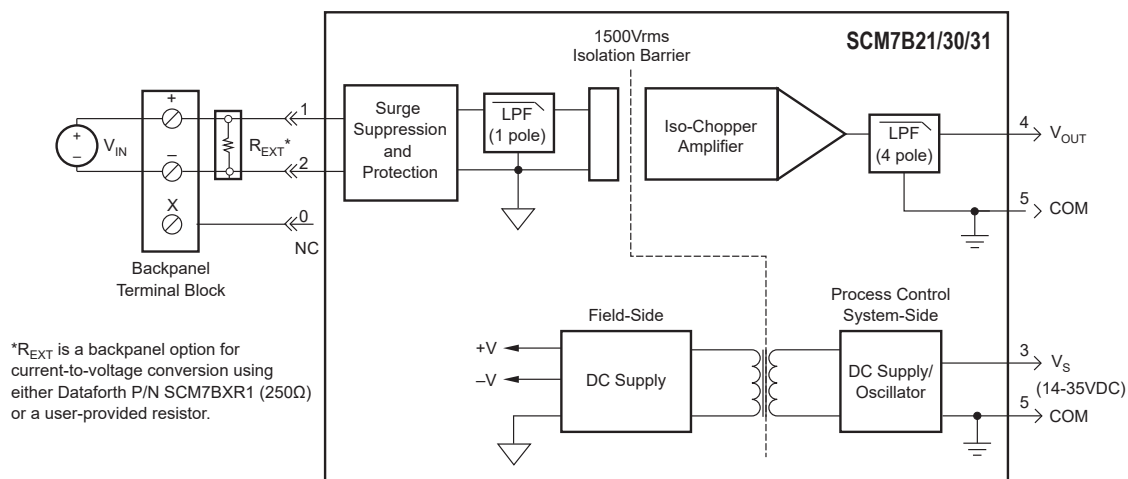

SCM7B21/30/31 Block Diagram - [For Module Dimensions and Pinouts, See Page 2-26](#)

Specifications Typical* at T_A = +25°C and +24VDC

Module	SCM7B21	SCM7B30	SCM7B31
Input			
Signal Range	±10V	See Table**	See Table**
Bias Current	±0.1nA	±0.5nA	±0.05nA
Resistance			
Normal	2MΩ (min)	50MΩ	500kΩ (min)
Power Off	2MΩ (min)	30kΩ (min)	500kΩ (min)
Overload	2MΩ (min)	30kΩ (min)	500kΩ (min)
Protection			
Continuous	120Vrms (max)	120Vrms (max)	120Vrms (max)
Transient	ANSI/IEEE C37.90.1	ANSI/IEEE C37.90.1	ANSI/IEEE C37.90.1
Output			
Signal Range ⁽¹⁾	±10V	†	†
Effective Available Power ⁽¹⁾	10mW	40mW	40mW
Resistance	<1Ω	<1Ω	<1Ω
Protection	Continuous Short-to-Ground	Continuous Short-to-Ground	Continuous Short-to-Ground
Voltage/Current Limit	±12V, ±14mA	±12V, ±14mA	±12V, ±14mA
CMV (Input-to-Output)			
Continuous	1500Vrms	1500Vrms	1500Vrms
Transient	ANSI/IEEE C37.90.1	ANSI/IEEE C37.90.1	ANSI/IEEE C37.90.1
CMRR (50 or 60Hz)	100dB	160dB	120dB
Accuracy ⁽²⁾	±0.03% Span (typ) ±0.1% Span (max)	±0.03% Span (typ) ±0.1% Span (max)	±0.03% Span (typ) ±0.1% Span (max)
Linearity ⁽³⁾	±0.01% Span (typ) ±0.02% Span (max)	±0.01% Span (typ) ±0.02% Span (max)	±0.01% Span (typ) ±0.02% Span (max)
Stability (−40°C to +85°C)			
Gain	±55ppm/°C	±35ppm/°C	±55ppm/°C
Input Offset	N/A ⁽⁴⁾	±0.5μV/°C	±5μV/°C
Zero Suppression	N/A	±0.005%(V _Z) ⁽⁵⁾ /°C	±0.005%(V _Z) ⁽⁵⁾ /°C
Output Offset	±0.001% Span/°C	±0.002% Span/°C	±0.002% Span/°C
Noise			
Peak at 5MHz B/W	1mV	500μV	500μV
RMS at 10Hz to 100kHz B/W	250μV	250μV	250μV
Peak at 0.1Hz to 10Hz B/W	1μV RTI ⁽⁶⁾	1μV RTI ⁽⁶⁾	1μV RTI ⁽⁶⁾
Frequency and Time Response			
Bandwidth, −3dB	300Hz	3Hz	3Hz
NMR (50/60Hz)	80dB per Decade above 300Hz	80/85dB	80/85dB
Step Response, 90% Span	1.5ms	165ms	165ms
Supply Voltage	14 - 35VDC	14 - 35VDC	14 - 35VDC
Current ⁽¹⁾	16mA	12mA	12mA
Sensitivity	±0.0002%/V _S	±0.0001%/V _S	±0.0001%/V _S
Mechanical Dimensions (h)x(w)x(d)	2.13" x 1.705" x 0.605" (54.1mm x 43.3mm x 15.4mm)	2.13" x 1.705" x 0.605" (54.1mm x 43.3mm x 15.4mm)	2.13" x 1.705" x 0.605" (54.1mm x 43.3mm x 15.4mm)
Environmental			
Operating Temperature Range	−40°C to +85°C	−40°C to +85°C	−40°C to +85°C
Storage Temperature Range	−40°C to +85°C	−40°C to +85°C	−40°C to +85°C
Relative Humidity	0 to 95% Noncondensing	0 to 95% Noncondensing	0 to 95% Noncondensing
Emissions EN61000-6-4	ISM, Group 1	ISM, Group 1	ISM, Group 1
Radiated, Conducted	Class A	Class A	Class A
Immunity EN61000-6-2	ISM, Group 1	ISM, Group 1	ISM, Group 1
RF	Performance A ±0.5% Span Error	Performance A ±0.5% Span Error	Performance A ±0.5% Span Error
ESD, EFT	Performance B	Performance B	Performance B

**** Ordering Information**

Model	Input Range
SCM7B21 ⁽⁷⁾	±10V
SCM7B30-01	0 to +10mV
SCM7B30-02	0 to +100mV
SCM7B30-03	0 to +1V
SCM7B30-05	+1V to +5V
SCM7B30-06	±10mV
SCM7B30-07	±100mV
SCM7B30-08	±1V
SCM7B31-01	0 to +10V
SCM7B31-02	±5V
SCM7B31-03	±10V
SCM7B31-04	0 to +5V
SCM7B31-05	0 to +20V
SCM7B31-06	±20V
SCM7B31-07	0 to +50V
SCM7B31-08	±50V

† Output Ranges Available

Output Range	Part No. Suffix	Example
+1V to +5V	NONE	SCM7B30-01
0 to +5V	A	SCM7B30-01A
0 to +10V	D	SCM7B30-01D

NOTES:

*Contact factory or your local Dataforth sales office for maximum values.

(1) Output Range and Supply Current specifications are based on minimum output load resistance. Minimum output load resistance is calculated by V_{OUT}^2/P_E , where P_E is the Output Effective Available Power that guarantees output range, accuracy, and linearity specifications.

(2) Accuracy includes the effects of repeatability, hysteresis, and linearity.

(3) Linearity is calculated using the best-fit straight line method.

(4) Input offset term included in output offset specification.

(5) V_Z is the nominal input voltage that results in a 0V output.

(6) RTI = Referenced to Input.

(7) SCM7B21 is available only as ±10V output.

SCM7B22

Isolated Bipolar Voltage-output Modules



DESCRIPTION

SCM7B22 voltage-output modules accept input signals in the $\pm 10V$ range from the process control system. The signal is isolated, buffered, and filtered to provide a unity gain field voltage output.

These modules incorporate a five-pole filtering approach to maximize both time and frequency response by taking advantage of both Thomson (Bessel) and Butterworth characteristics. One pole of the filter is on the process control system side of the isolation barrier; four are on the field side.

After the initial process control system-side filtering, the input signal is chopped by a proprietary chopper circuit and transferred across the transformer isolation barrier, suppressing transmission of common-mode spikes and surges. The signal is then reconstructed and filtered for field-side output.

Modules accept a wide 19-29VDC power supply range (+24VDC nominal). Their compact packages (2.13"x1.705"x0.605") save space and are ideal for high channel density applications. They are designed for easy DIN-rail mounting using any of the DIN backpanels.

FEATURES


- Accepts High-level Input to $\pm 10V$
- Provides High-level Output to $\pm 10V$
- 1500Vrms Transformer Isolation
- Accuracy, $\pm 0.03\%$ of Span (typ), $\pm 0.1\%$ (max)
- ANSI/IEEE C37.90.1 Transient Protection
- Output Protected to 120Vrms, Continuous
- Input Protected to $\pm 35VDC$
- Noise, 2mVp-p (5MHz), 1mVrms (100kHz)
- 100dB CMRR
- Easy DIN-rail Mounting
- CSA C/US Certified
- CE and ATEX Compliant
- Manufactured per RoHS III Directive 2015/863

BENEFITS

- Small Form-factor for High-density Applications
- Protects User Equipment from Lightning and Heavy Equipment Power-line Voltage
- Reduces Electrical Noise in Measured Signals
- Convenient System Expansion and Repair
- Signal Filtering in Noisy Environments
- Simplifies Sensor Interface and Signal Conditioning Design
- Provides Isolation of External Sensors
- Breaks Ground Loops
- Reduces EMC Concerns

APPLICATIONS

- Analog Signal Conditioning
- Industrial Process Control
- Test and Measurement
- System and Signal Monitoring
- Temperature Measurement
- Torque Measurement
- Civil Engineering
- Geotechnical Monitoring

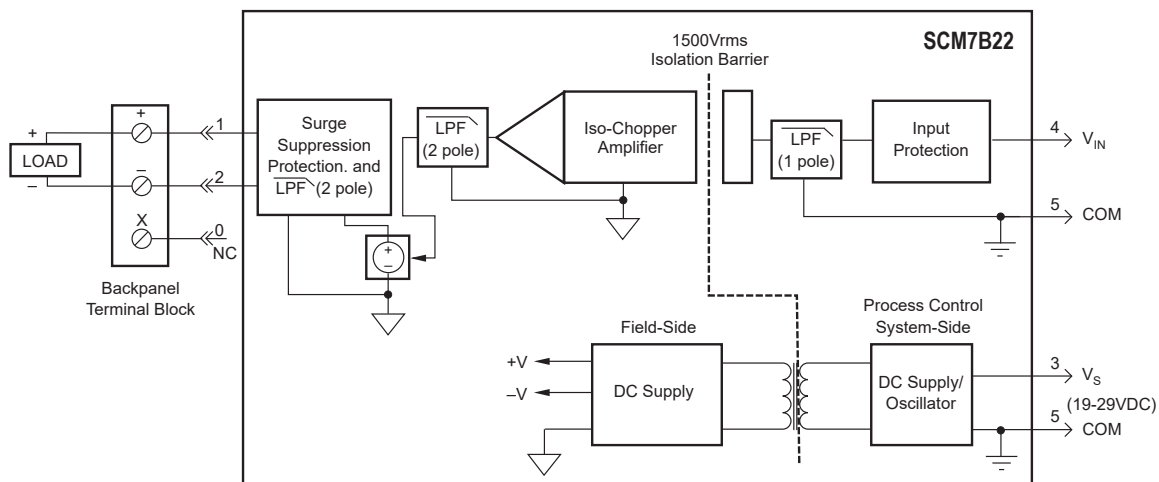

SCM7B22 Block Diagram - [For Module Dimensions and Pinouts. See Page 2-26](#)

Specifications Typical* at $T_A = +25^{\circ}\text{C}$ and +24VDC

Module	SCM7B22
Output	
Signal Range	$\pm 10\text{V}$
Drive Capability	$\pm 20\text{mA}$
Resistance	$< 1\Omega$
Protection	
Continuous	120Vrms
Transient	ANSI/IEEE C37.90.1
Voltage/Current Limit	$\pm 12.5\text{V}, \pm 40\text{mA}$
Input	
Signal Range	$\pm 10\text{V}$
Bias Current	$\pm 0.5\text{nA}$
Resistance	2M Ω (min)
Protection	$\pm 35\text{VDC}$ (no damage)
CMV (Input-to-Output)	
Continuous	1500Vrms
Transient	ANSI/IEEE C37.90.1
CMRR (50 or 60Hz)	100dB
Accuracy ⁽¹⁾	$\pm 0.03\%$ Span (typ)
	$\pm 0.1\%$ Span (max)
Linearity ⁽²⁾	$\pm 0.01\%$ Span (typ)
	$\pm 0.02\%$ Span (max)
Stability (-40°C to $+85^{\circ}\text{C}$)	
Gain	$\pm 35\text{ppm}/^{\circ}\text{C}$
Output Offset	$\pm 0.001\%$ Span/ $^{\circ}\text{C}$
Noise	
Peak at 5MHz B/W	2mV
RMS at 10Hz to 100kHz B/W	1mV
Peak at 0.1Hz to 10Hz B/W	10 μV RTI ⁽³⁾
Frequency and Time Response	
Bandwidth, -3dB	400Hz
NMR (-3dB at 400Hz)	100dB per Decade above 400Hz
Step Response, 90% Span	1ms
Supply Voltage	19-29VDC
Current	16mA
Sensitivity	$\pm 0.0001\%/V_s$
Mechanical Dimensions (h)x(w)x(d)	2.13" x 1.705" x 0.605" (54.1mm x 43.3mm x 15.4mm)
Environmental	
Operating Temperature Range	-40°C to $+85^{\circ}\text{C}$
Storage Temperature Range	-40°C to $+85^{\circ}\text{C}$
Relative Humidity	0 to 95% Noncondensing
Emissions EN61000-6-4	ISM, Group 1
Radiated, Conducted	Class A
Immunity EN61000-6-2	ISM, Group 1
RF	Performance A $\pm 0.5\%$ Span Error
ESD, EFT	Performance B

NOTES:

*Contact factory or your local Dataforth sales office for maximum values.

(1) Accuracy includes the effects of repeatability, hysteresis, and linearity.

(2) Linearity is calculated using the best-fit straight line method.

(3) RTI = Referenced to Input.

Ordering Information

Model	Input Range	Output Range
SCM7B22	$\pm 10\text{V}$	$\pm 10\text{V}$

SCM7B32/33

Isolated Process Current/Voltage-input Modules



DESCRIPTION

The SCM7B32 current-input modules accept input signals in the 4-20mA or 0-20mA ranges from the field and provide a high-level output to the process control system (Figure below). Current-to-voltage conversion occurs internal to the module, which is factory calibrated to ensure the highest accuracy.

SCM7B33 voltage-input modules accept input signals in the +1V to +5V or 0 to +5V ranges from the field and provide a high-level output to the process control system. As an alternative, the SCM7B33 can be used with an external 250Ω resistor (Dataforth SCM7BXR1 or equivalent), to accept input signals in the 4-20mA or 0-20mA ranges. Using the external sense resistor allows the module to be removed without disrupting the current loop. All SCM7B33s are shipped with a SCM7BXR1 resistor.

These modules incorporate a five-pole filtering approach to maximize both time and frequency response by taking advantage of both Thomson (Bessel) and Butterworth characteristics. One pole of the filter is on the field side of the isolation barrier; four are on the process control system side.

After the initial field-side filtering (conversion-SCM7B32 only), the input signal is chopped by a proprietary chopper circuit and transferred across the transformer isolation barrier, suppressing transmission of common mode spikes and surges. The signal is then reconstructed and filtered for process control system output.

Modules accept a wide 14-35VDC power supply range (+24VDC nominal). Their compact packages (2.13"x1.705"x0.605") save space and are ideal for high-channel density applications. They are designed for easy DIN-rail mounting using any of the DIN backpanels.

FEATURES


- Accepts Current or Voltage Input
- Provides High-level Voltage-outputs
- 1500Vrms Transformer Isolation
- Accuracy, $\pm 0.03\%$ of Span (typ), $\pm 0.1\%$ (max)
- ANSI/IEEE C37.90.1 Transient Protection
- Input Protected to 120Vrms, Continuous
- Noise, 500μVp-p (5MHz), 300μVrms (100kHz)
- 105dB CMRR
- Easy DIN-rail Mounting
- CSA C/US Certified
- CE and ATEX Compliant
- Manufactured per RoHS III Directive 2015/863

BENEFITS

- Small Form-factor for High-density Applications
- Protects User Equipment from Lightning and Heavy Equipment Power-line Voltage
- Reduces Electrical Noise in Measured Signals
- Convenient System Expansion and Repair
- Signal Filtering in Noisy Environments
- Simplifies Sensor Interface and Signal Conditioning Design
- Provides Isolation of External Sensors
- Breaks Ground Loops
- Reduces EMC Concerns

APPLICATIONS

- Analog Signal Conditioning
- Industrial Process Control
- Test and Measurement
- System and Signal Monitoring
- Temperature Measurement
- Torque Measurement
- Civil Engineering
- Geotechnical Monitoring

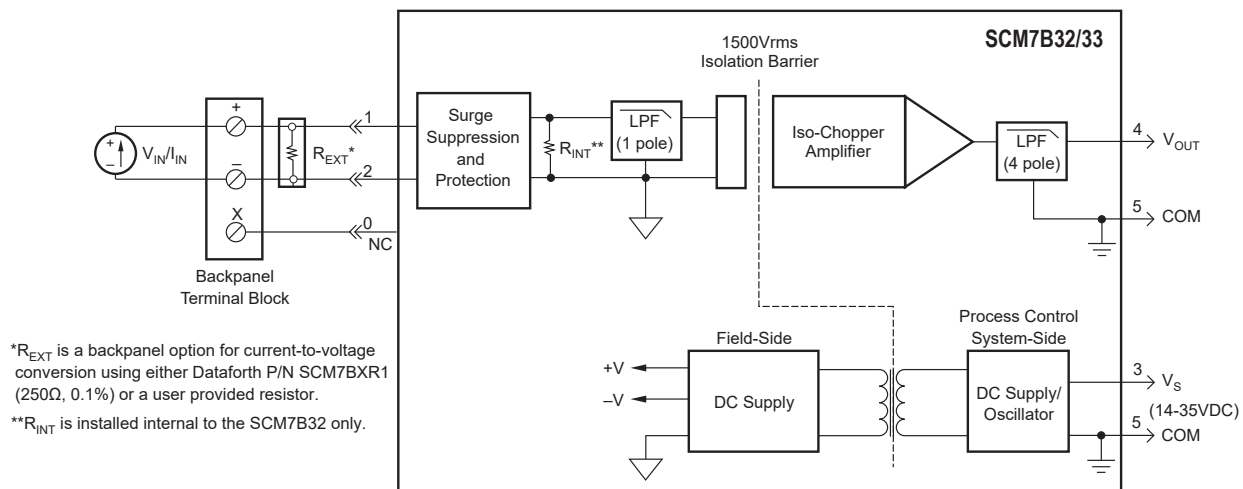

SCM7B32/33 Block Diagram - [For Module Dimensions and Pinouts, See Page 2-26](#)

Specifications Typical* at T_A = + 25°C and +24VDC

Module	SCM7B32	SCM7B33
Input		
Signal Range	4-20mA, 0-20mA	+1V to +5V, 0 to +5V
Bias Current	N/A	±0.1nA
Resistance		
Normal	<100Ω	2MΩ
Power Off	<100Ω	2MΩ
Overload	30kΩ	2MΩ
Protection		
Continuous	120Vrms (max)	120Vrms (max)
Transient	ANSI/IEEE C37.90.1	ANSI/IEEE C37.90.1
Output		
Signal Range ⁽¹⁾	†	†
Effective Available Power ⁽¹⁾	40mW	40mW
Resistance	<1Ω	<1Ω
Protection	Continuous Short-to-Ground	Continuous Short-to-Ground
Voltage/Current Limit	±12V, ±14mA	±12V, ±14mA
CMV (Input-to-Output)		
Continuous	1500Vrms	1500Vrms
Transient	ANSI/IEEE C37.90.1	ANSI/IEEE C37.90.1
CMRR (50 or 60Hz)	105dB	105dB
Accuracy ⁽²⁾	±0.03% Span (typ) ±0.1% Span (max)	±0.03% Span (typ) ±0.1% Span (max)
Linearity ⁽³⁾	±0.01% Span (typ) ±0.02% Span (max)	±0.01% Span (typ) ±0.02% Span (max)
Stability (–40°C to +85°C)		
Gain	±35ppm/°C	±35ppm/°C
Input Offset	N/A ⁽⁴⁾	N/A ⁽⁴⁾
Output Offset	±0.003% Span/°C	±0.003% Span/°C
Noise		
Peak at 5MHz B/W	500μV	500μV
RMS at 10Hz to 100kHz B/W	300μV	300μV
Peak at 0.1Hz to 10Hz B/W	1μV RTI ⁽⁵⁾	1μV RTI ^{(5)*}
Frequency and Time Response		
Bandwidth, –3dB	100Hz	100Hz
NMR (–3dB at 100Hz)	80dB per Decade Above 100Hz	80dB per Decade Above 100Hz
Step Response, 90% Span	5ms	5ms
Supply Voltage	14 - 35VDC	14 - 35VDC
Current ⁽¹⁾	12mA	12mA
Sensitivity	±0.0001%/°V _S	±0.0001%/°V _S
Mechanical Dimensions (h)x(w)x(d)	2.13" x 1.705" x 0.605" (54.1mm x 43.3mm x 15.4mm)	2.13" x 1.705" x 0.605" (54.1mm x 43.3mm x 15.4mm)
Environmental		
Operating Temperature Range	–40°C to +85°C	–40°C to +85°C
Storage Temperature Range	–40°C to +85°C	–40°C to +85°C
Relative Humidity	0 to 95% Noncondensing	0 to 95% Noncondensing
Emissions EN61000-6-4	ISM, Group 1	ISM, Group 1
Radiated, Conducted	Class A	Class A
Immunity EN61000-6-2	ISM, Group 1	ISM, Group 1
RF	Performance A ±0.5% Span Error	Performance A ±0.5% Span Error
ESD, EFT	Performance B	Performance B

NOTES:

*Contact factory or your local Dataforth sales office for maximum values.

(1) Output Range and Supply Current specifications are based on minimum output load resistance. Minimum output load resistance is calculated by V_{OUT}^2/P_E , where P_E is the output Effective Available Power that guarantees output range, accuracy, and linearity specifications.

(2) Accuracy includes the effects of repeatability, hysteresis, and linearity.

For SCM7B33, does not include SCM7BXR1 accuracy.

(3) Linearity is calculated using the best-fit straight line method.

(4) Input offset term included in output offset specification.

(5) RTI = Referenced to Input.

Ordering Information

Model	Input Range
SCM7B32-01	4-20mA
SCM7B32-02	0-20mA
SCM7B33-01	+1V to +5V
SCM7B33-02	0 to +5V

†Output Ranges Available

Output Range	Part No. Suffix	Example
+1V to +5V	NONE	SCM7B32-01
0 to +5V	A	SCM7B32-01A
0 to +10V	D	SCM7B32-01D

SCM7B34/34N



Isolated Linearized 2- or 3-wire RTD-input Modules

DESCRIPTION

Each SCM7B34/34N RTD-input module accepts a single channel of 100Ω Platinum ($\alpha = 0.00385$) or 120Ω Nickel ($\alpha = 0.00672$) RTD input and produces an input voltage in response to a low-level current excitation. The input signal is filtered, isolated, amplified, linearized, and converted to a high-level analog voltage for output to the process control system.

These modules incorporate a five-pole filtering approach to maximize both time and frequency response by taking advantage of both Thomson (Bessel) and Butterworth characteristics. One pole of the filter is on the field side of the isolation barrier; four are on the process control system side.

In response to the low-level current excitation signal, the RTD Input signal is chopped by a proprietary chopper circuit and transferred across the transformer isolation barrier, suppressing transmission of common-mode spikes and surges. The signal is then reconstructed and filtered for process control system output.

Linearization is achieved by creating a non-linear transfer function through the module itself. This non-linear transfer function is configured at the factory and is designed to be equal and opposite to the specific RTD non-linearity. Lead compensation is achieved by matching two current paths thus canceling the effects of lead resistance.

Modules accept a wide 14-35VDC power supply range (+24VDC nominal). Their compact packages (2.13"x1.705"x0.605") save space and are ideal for high channel density applications. They are designed for easy DIN-rail mounting using any of the -DIN backpanels.

FEATURES


- Interfaces to 100Ω Platinum or 120Ω Nickel RTDs
- Provides 250μA RTD Excitation Current
- Linearizes RTD Signal Response
- Provides High-level Voltage-outputs
- 1500Vrms Transformer Isolation
- Accuracy, $\pm 0.05\%$ to $\pm 0.15\%$ of Span (typ)
- Nonconformity, $\pm 0.025\%$ to $\pm 0.07\%$ of Span (typ)
- ANSI/IEEE C37.90.1 Transient Protection
- Input Protected to 120Vrms, Continuous
- Noise, 500μVp-p (5MHz), 250μVrms (100kHz)
- 160dB CMRR
- 85dB NMR at 60Hz, 80dB at 50Hz
- Easy DIN-rail Mounting
- CSA C/US Certified
- CE and ATEX Compliant
- Manufactured per RoHS III Directive 2015/863

BENEFITS

- Breaks Ground Loops
- Protects User Equipment from Lightning and Heavy Equipment Power-line Voltage
- Small Form-factor for High-density Applications
- Reduces EMC Concerns
- Reduces Electrical Noise in Measured Signals
- Signal Filtering in Noisy Environments

APPLICATIONS

- Analog Signal Conditioning
- Industrial Process Control
- Test and Measurement
- System and Signal Monitoring
- Temperature Measurement
- Torque Measurement
- Civil Engineering
- Geotechnical Monitoring

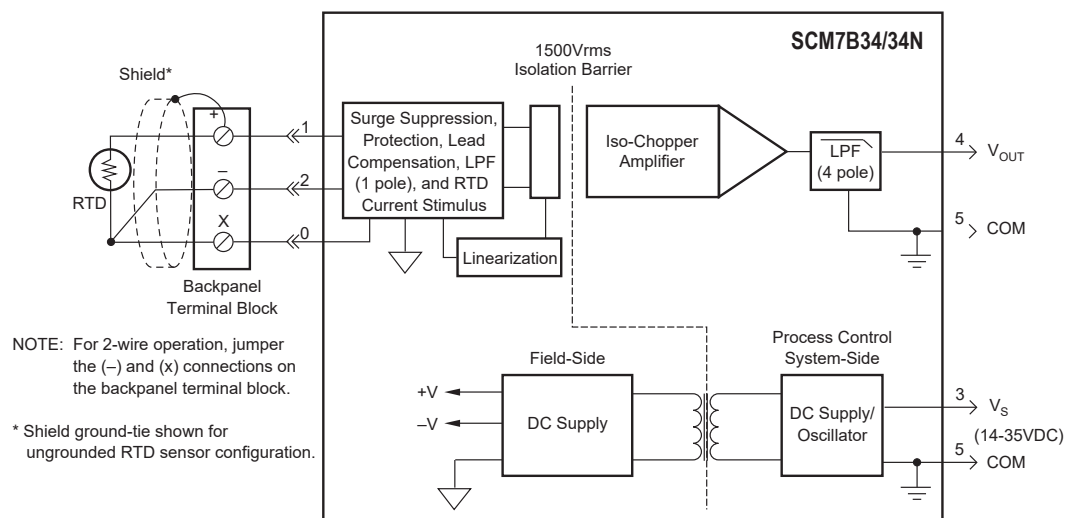

SCM7B34/34N Block Diagram - [For Module Dimensions and Pinouts. See Page 2-26](#)

Specifications Typical* at T_A = +25°C and +24VDC

Module	SCM7B34	SCM7B34N
Input Signal Range	100Ω Pt RTD See Ordering Information	120Ω Ni RTD See Ordering Information
Protection Continuous Transient	120Vrms (max) ANSI/IEEE C37.90.1	120Vrms (max) ANSI/IEEE C37.90.1
Sensor Excitation Current ⁽¹⁾ Lead Resistance Effect	≈250μA ±0.02°C/Ω (max)	≈250μA ±0.02°C/Ω (max)
Output Signal Range ⁽²⁾ Effective Available Power ⁽²⁾ Resistance Protection Voltage/Current Limit	† 40mW <1Ω Continuous Short-to-Ground ±12V, ±14mA	† 40mW <1Ω Continuous Short-to-Ground ±12V, ±14mA
CMV (Input-to-Output) Continuous Transient CMRR (50 or 60Hz)	1500Vrms ANSI/IEEE C37.90.1 160dB	1500Vrms ANSI/IEEE C37.90.1 160dB
Accuracy ⁽³⁾ Nonconformity ⁽⁴⁾ Stability (–40°C to +85°C) Gain Input Offset Zero Suppression Output Offset Noise Peak at 5MHz B/W RMS at 10Hz to 100kHz B/W Peak at 0.1Hz to 10Hz B/W Open Input Response ‘+’ Lead ‘-’ Lead ‘x’ Lead Open Input Detection Time	See Ordering Information See Ordering Information ±60ppm/°C ±1μV/°C ±0.002%(R _L /R _{SPAN}) ⁽⁵⁾ /°C ±0.002% Span/°C 500μV 250μV 1μV RTI ⁽⁶⁾ Upscale Non-deterministic Downscale <5s	See Ordering Information See Ordering Information ±60ppm/°C ±1μV/°C ±0.002%(R _L /R _{SPAN}) ⁽⁵⁾ /°C ±0.002% Span/°C 500μV 250μV 1μV RTI ⁽⁶⁾ Upscale Non-deterministic Downscale <5s
Frequency and Time Response Bandwidth, –3dB NMR (50/60Hz) Step Response, 90% Span	3Hz 80/85dB 250ms	3Hz 80/85dB 250ms
Supply Voltage Current ⁽²⁾ Sensitivity	14 - 35VDC 12mA ±0.0001%/°V _S	14 - 35VDC 12mA ±0.0001%/°V _S
Mechanical Dimensions (h)x(w)x(d)	2.13" x 1.705" x 0.605" (54.1mm x 43.3mm x 15.4mm)	2.13" x 1.705" x 0.605" (54.1mm x 43.3mm x 15.4mm)
Environmental Operating Temperature Range Storage Temperature Range Relative Humidity Emissions EN61000-6-4 Radiated, Conducted Immunity EN61000-6-2 RF ESD, EFT	–40°C to +85°C –40°C to +85°C 0 to 95% Noncondensing ISM, Group 1 Class A ISM, Group 1 Performance A ±0.5% Span Error Performance B	–40°C to +85°C –40°C to +85°C 0 to 95% Noncondensing ISM, Group 1 Class A ISM, Group 1 Performance A ±0.5% Span Error Performance B

Ordering Information

Model†	Input Range	Accuracy ⁽²⁾ (typ) (max)		Nonconformity ⁽³⁾ (typ) (max)	
100Ω Pt **					
SCM7B34-01	–100°C to +100°C (–148°F to +212°F)	±0.075% (0.15°C)	±0.15% (0.30°C)	±0.025% (0.05°C)	±0.05% (0.10°C)
SCM7B34-02	0°C to +100°C (+32°F to +212°F)	±0.10% (0.10°C)	±0.2% (0.20°C)	±0.025% (0.025°C)	±0.05% (0.05°C)
SCM7B34-03	0°C to +200°C (+32°F to +392°F)	±0.075% (0.15°C)	±0.15% (0.30°C)	±0.025% (0.05°C)	±0.05% (0.10°C)
SCM7B34-04	0°C to +600°C (+32°F to +1112°F)	±0.05% (0.30°C)	±0.1% (0.60°C)	±0.025% (0.15°C)	±0.05% (0.30°C)
SCM7B34-05	–50°C to +350°C (–58°F to +662°F)	±0.05% (0.20°C)	±0.1% (0.40°C)	±0.025% (0.1°C)	±0.05% (0.20°C)
120Ω Ni **					
SCM7B34N-01	0°C to +300°C (+32°F to +572°F)	±0.15% (0.45°C)	±0.3% (0.90°C)	±0.06% (0.18°C)	±0.12% (0.36°C)
SCM7B34N-02	0°C to +200°C (+32°F to +392°F)	±0.15% (0.30°C)	±0.3% (0.60°C)	±0.07% (0.14°C)	±0.14% (0.28°C)

†Output Ranges Available

Output Range	Part No. Suffix	Example
+1V to +5V	NONE	SCM7B34-01
0 to +5V	A	SCM7B34-01A
0 to +10V	D	SCM7B34-01D

****RTD Standards**

Type	Alpha Coefficient	DIN	JIS	IEC
100Ω Pt	0.00385	DIN 43760	JIS C 1604-1989	IEC 751
120Ω Ni	0.00672			

NOTES:

*Contact factory or your local Dataforth sales office for maximum values.

(1) Sensor excitation current is model dependent.

(2) Output Range and Supply Current specifications are based on minimum output load resistance. Minimum output load resistance is calculated by V_{OUT}^2/P_E , where P_E is the output Effective Available Power that guarantees output range, accuracy, and conformity specifications.

(3) Accuracy includes the effects of repeatability, hysteresis, and conformity.

(4) Nonconformity is calculated using the best-fit straight line method.

(5) R_L is the value of the RTD resistance at the lowest measurement point. R_{SPAN} is the change in resistance over the measurement span.

(6) RTI = Referenced to Input.

SCM7B35



Isolated 2-wire Transmitter-interface Modules with Loop Power

DESCRIPTION

SCM7B35 current-input modules accept input signals in the 4-20mA range from the field and provide a high-level voltage output to the process control system. Current-to-voltage conversion occurs internal to the module, which is factory calibrated to ensure the highest accuracy.

Loop power is provided by the module, enabling a 2-wire transmitter to be directly connected without the need for a separate DC power supply for the 2-wire transmitter.

These modules incorporate a five-pole filtering approach to maximize both time and frequency response by taking advantage of both Thomson (Bessel) and Butterworth characteristics. One pole of the filter is on the field side of the isolation barrier; four are on the process control system side.

After the initial field-side filtering, the input signal is chopped by a proprietary chopper circuit and transferred across the transformer isolation barrier, suppressing transmission of common-mode spikes and surges. The signal is then reconstructed and filtered for process control system output.

Modules accept a wide 18-35VDC power supply range (+24VDC nominal). Their compact packages (2.13"x1.705"x0.605") save space and are ideal for high channel density applications. They are designed for easy DIN-rail mounting using any of the DIN backpanels.

FEATURES


- 2-wire Transmitter Interface
- Accepts 4-20mA Signals
- Provides an Isolated +24VDC Supply to Power the Loop
- Provides High-level Voltage-outputs
- 1500Vrms Transformer Isolation
- Accuracy, $\pm 0.03\%$ of Span (typ) $\pm 0.1\%$ (max)
- ANSI/IEEE C37.90.1 Transient Protection
- 120Vrms Input Protection
- 105dB CMRR
- Easy DIN-rail Mounting
- CSA C/US Certified
- CE and ATEX Compliant
- Manufactured per RoHS III Directive 2015/863

BENEFITS

- Small Form-factor for High-density Applications
- Protects User Equipment from Lightning and Heavy Equipment Power-line Voltage
- Reduces Electrical Noise in Measured Signals
- Convenient System Expansion and Repair
- Signal Filtering in Noisy Environments
- Simplifies Sensor Interface and Signal Conditioning Design
- Provides Isolation of External Sensors
- Breaks Ground Loops
- Reduces EMC Concerns

APPLICATIONS

- Analog Signal Conditioning
- Industrial Process Control
- Test and Measurement
- System and Signal Monitoring
- Temperature Measurement
- Torque Measurement
- Civil Engineering
- Geotechnical Monitoring

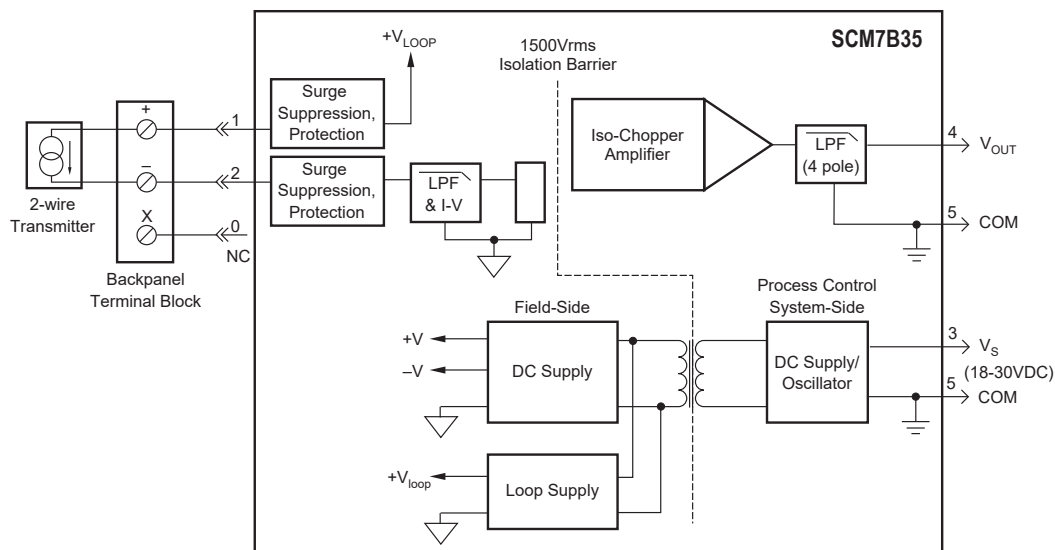

SCM7B35 Block Diagram - [For Module Dimensions and Pinouts. See Page 2-26](#)

Specifications Typical* at $T_A = +25^\circ\text{C}$ and +24VDC

Module	SCM7B35
Input	
Signal Range	4-20mA
Protection	
Continuous	120Vrms (max)
Transient	ANSI/IEEE C37.90.1
Loop Voltage ⁽¹⁾	+24VDC
Output	
Signal Range ⁽²⁾	See Ordering Information
Effective Available Power ⁽²⁾	40mW
Resistance	<1 Ω
Protection	Continuous Short-to-Ground
Voltage/Current Limit	$\pm 16\text{V}$, $\pm 14\text{mA}$
CMV (Input-to-Output)	
Continuous	1500Vrms
Transient	ANSI/IEEE C37.90.1
CMRR (50 or 60Hz)	105dB
Accuracy ⁽³⁾	$\pm 0.03\%$ Span (typ)
	$\pm 0.1\%$ Span (max)
Linearity ⁽⁴⁾	$\pm 0.01\%$ Span (typ)
	$\pm 0.02\%$ Span (max)
Stability (-40°C to $+85^\circ\text{C}$)	
Gain	$\pm 40\text{ppm}/^\circ\text{C}$
Input Offset	N/A ⁽⁵⁾
Output Offset	$\pm 0.003\%$ Span/ $^\circ\text{C}$
Noise	
Peak at 5MHz B/W	5mV
RMS at 10Hz to 100kHz B/W	500 μV
Peak at 0.1Hz to 10Hz B/W	3 μV RTI ⁽⁶⁾
Frequency and Time Response	
Bandwidth, -3dB	100Hz
NMR (-3dB at 100Hz)	80dB per Decade above 100Hz
Step Response, 90% Span	5ms
Supply Voltage	18 to 30VDC
Current ⁽²⁾	56mA
Sensitivity	$\pm 0.0002\%/V_S$
Mechanical Dimensions	
(h)x(w)x(d)	2.13" x 1.705" x 0.605" (54.1mm x 43.3mm x 15.4mm)
Environmental	
Operating Temperature Range	-40°C to $+85^\circ\text{C}$
Storage Temperature Range	-40°C to $+85^\circ\text{C}$
Relative Humidity	0 to 95% Noncondensing
Emissions EN61000-6-4	ISM, Group 1
Radiated, Conducted	Class A
Immunity EN61000-6-2	ISM, Group 1
RF	Performance A $\pm 0.5\%$ Span Error
ESD, EFT	Performance B

NOTES:

*Contact factory or your local Dataforth sales office for maximum values.

(1) +24V will be supplied to the loop for an open-loop condition. Approximately +22V to +16V will be supplied for a corresponding 4mA-to-20mA input. Loop voltage is independent of supply voltage.

(2) Output Range and Supply Current specifications are based on minimum output-load resistance. Minimum output-load resistance is calculated by V_{out}^2/P_E , where P_E is the Output Effective Available Power that guarantees output range, accuracy, and linearity specifications.

(3) Accuracy includes the effects of repeatability, hysteresis, and linearity.

(4) Linearity is calculated using the best-fit straight line method.

(5) Input offset term included in output offset specification.

(6) RTI = Referenced to Input.

Ordering Information

Model	Input Range	Output Range
SCM7B35-01	4-20mA	+1V to +5V
SCM7B35-01A	4-20mA	0 to +5V
SCM7B35-01D	4-20mA	0 to +10V
SCM7B35-02	4-20mA	+2V to +10V

SCM7B36

Isolated Potentiometer-input Modules



DESCRIPTION

Each SCM7B36 Potentiometer-input module provides a single channel of resistance input which is filtered, isolated, amplified, and converted to a high-level analog voltage output.

The SCM7B36 module interfaces to slidewires and potentiometers in both two-wire or three-wire configuration and incorporates a five-pole filtering approach to maximize both time and frequency response by taking advantage of both (Bessel) and Butterworth characteristics. One pole of the filter is on the field side of the isolation barrier; four are on the process control system side. In the 3-wire configuration, lead resistance compensation is provided if the resistance of the "x" lead is closely equivalent to that of the "+" lead. Internal to the module, measurement error due to lead resistance is canceled.

In response to the low-level current excitation, and after initial field-side filtering, the input signal is chopped by a proprietary chopper circuit and transferred across the transformer isolation barrier, suppressing transmission of common-mode spikes and surges. The signal is then reconstructed and filtered for process control system output.

Six standard input resistance ranges are offered, from 100Ω to 10kΩ, with three output ranges available: 0-5V, 1-5V, and 0-10V. Modules accept a wide 14-35VDC power supply range (+24VDC nominal). Their compact packages (2.13" x 1.705" x 0.605") save space and are ideal for high channel density applications. They are designed for easy DIN-rail mounting using any of the DIN backpanels.

FEATURES


- 2-wire Transmitter Interface
- Accepts 4-20mA Signals
- Provides an Isolated +24VDC Supply to Power the Loop
- Provides High-level Voltage-outputs
- 1500Vrms Transformer Isolation
- Accuracy, $\pm 0.03\%$ of Span (typ) $\pm 0.1\%$ (max)
- ANSI/IEEE C37.90.1 Transient Protection
- 120Vrms Input Protection
- 105dB CMRR
- Easy DIN-rail Mounting
- CSA C/US Certified
- CE and ATEX Compliant
- Manufactured per RoHS III Directive 2015/863

BENEFITS

- Small Form-factor for High-density Applications
- Protects User Equipment from Lightning and Heavy Equipment Power-line Voltage
- Reduces Electrical Noise in Measured Signals
- Convenient System Expansion and Repair
- Signal Filtering in Noisy Environments
- Simplifies Sensor Interface and Signal Conditioning Design
- Provides Isolation of External Sensors
- Breaks Ground Loops
- Reduces EMC Concerns

APPLICATIONS

- Analog Signal Conditioning
- Industrial Process Control
- Test and Measurement
- System and Signal Monitoring
- Temperature Measurement
- Torque Measurement
- Civil Engineering
- Geotechnical Monitoring

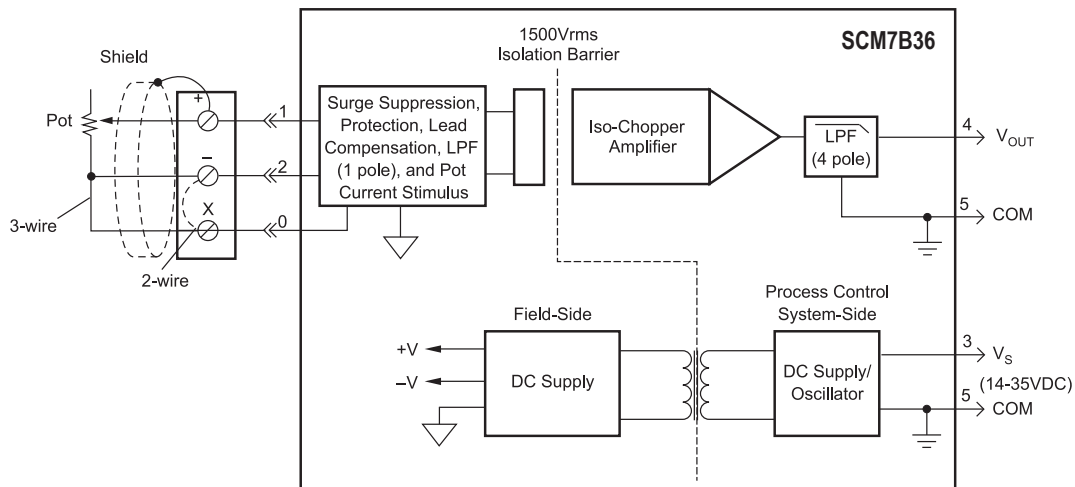

SCM7B36 Block Diagram - [For Module Dimensions and Pinouts, See Page 2-26](#)

Specifications Typical* at T_A = +25°C and +24VDC

Module	SCM7B36
Input Range Protection Continuous Transient	(See Ordering Information) 120Vrms (max) ANSI/IEEE C37.90.1
Sensor Excitation Current Lead Resistance Effect (3-wire) ⁽¹⁾	65µA (10kΩ) to 260µA (100Ω) -01 thru -04 : ±0.005Ω/ -05 : ±0.02Ω/Ω -06 : ±0.04Ω/Ω
Output Range ⁽²⁾ (See Output Range) Effective Available Power ⁽²⁾ Resistance Protection Voltage/Current Limit	† 40mW < 1Ω Continuous Short-to-Ground ±12V, ±14mA
CMV (Input to Output) Continuous Transient CMRR (50 or 60Hz)	1500Vrms ANSI/IEEE C37.90.1 120dB
Accuracy ⁽³⁾	±0.03% Span (typ) ±0.1% Span (max)
Linearity ⁽⁴⁾	±0.01% Span (typ) ±0.02% Span (max)
Stability (–40°C to +85°C) Input Offset Output Offset Gain	±0.01Ω/°C ±30µV/°C ±60ppm/°C
Noise Peak at 5MHz B/W RMS at 10Hz to 100kHz B/W Peak at 0.1Hz to 10Hz B/W	1mV 250µV 1µV RTI ⁽⁵⁾
Open Input Response '+' Lead '–' Lead 'x' Lead Open Input Detection Time	Upscale Non-deterministic Downscale <5s
Frequency and Time Response Bandwidth, –3dB NMR (50/60Hz) Step Response, 0 to 90%	3Hz 80/85dB 250ms
Supply Voltage Current ⁽²⁾ Sensitivity	14-35VDC 12mA ±0.0001%/V _S
Mechanical Dimensions (h)x(w)x(d)	2.13" x 1.705" x 0.605" (54.1mm x 43.3mm x 15.4mm)
Environmental Operating Temperature Range Storage Temperature Range Relative Humidity Emissions EN61000-6-4 Radiated, Conducted Immunity EN61000-6-2 RF ESD, EFT	–40°C to +85°C –40°C to +85°C 0 to 95% Noncondensing ISM, Group 1 Class A ISM, Group 1 Performance A ±0.5% Span Error Performance B

NOTES:

*Contact factory or your local Dataforth sales office for maximum values.

(1) Lead resistance effect is given for the condition of not having the NTC thermistor installed in the backpanel. As a general rule, as long as the lead resistance of the (+) lead matches the parallel combination of the thermistor and lead resistance in the (X) lead, the given specifications apply.

(2) Output Range and Supply Current specifications are based on minimum output load resistance. Minimum output load resistance is calculated by V_{OUT}^2/P_E , where P_E is the output Effective Available Power that guarantees output range and accuracy specifications.

(3) Accuracy includes the effects of repeatability, hysteresis, and linearity, but does not include sensor accuracy.

(4) Linearity is calculated using the best-fit straight line method.

(5) RTI = Referenced to Input.

Ordering Information

Model	Input Range
SCM7B36-01	0 to 100Ω
SCM7B36-02	0 to 200Ω
SCM7B36-03	0 to 500Ω
SCM7B36-04	0 to 1kΩ
SCM7B36-05	0 to 5kΩ
SCM7B36-06	0 to 10kΩ

†Output Ranges Available

Output Range	Part No. Suffix	Example
+1V to +5V	NONE	SCM7B36-01
0 to +5V	A	SCM7B36-01A
0 to +10V	D	SCM7B36-01D

SCM7B37



Non-linearized Isolated Thermocouple-input Modules

DESCRIPTION

SCM7B37 non-linearized modules accept a single channel of input from Type J, K, T, E, R, S, or B thermocouples. The signal is filtered, isolated, amplified, and converted to a high-level analog voltage for output to the process control system.

Cold junction compensation (CJC) is performed using an NTC thermistor (see "Additional SCM7B Part Numbers" section for P/N and AN701 for further information) externally mounted under the field-side terminal block on the backpanel. Open thermocouple detection is upscale using a 30nA current source in the input circuitry.

These modules incorporate a five-pole filtering approach to maximize both time and frequency response by taking advantage of both Thomson (Bessel) and Butterworth characteristics. One pole of the filter is on the field side of the isolation barrier; four are on the process control system side.

After the initial field-side filtering, the input signal is chopped by a proprietary chopper circuit and transferred across the transformer isolation barrier, suppressing transmission of common-mode spikes and surges. The signal is then reconstructed and filtered for process control system output.

Modules accept a wide 14-35VDC power supply range (+24VDC nominal). Their compact packages (2.13"x1.705"x0.605") save space and are ideal for high channel density applications. They are designed for easy DIN-rail mounting using any of the DIN backpanels.

FEATURES


- Interfaces to Type J, K, T, E, R, S, and B Thermocouples
- Provides High-level Voltage-outputs
- 1500Vrms Transformer Isolation
- Accuracy, $\pm 0.03\%$ of Span (typ) $\pm 0.1\%$ (max)
- ANSI/IEEE C37.90.1 Transient Protection
- Input Protected to 120Vrms, Continuous
- Noise, 500 μ Vp-p (5MHz), 250 μ Vrms (100kHz)
- 160dB CMRR
- 85dB NMR at 60Hz, 80dB at 50Hz
- Easy DIN-rail Mounting
- CSA C/US Certified
- CE and ATEX Compliant
- Manufactured per RoHS III Directive 2015/863

BENEFITS

- Small Form-factor for High-density Applications
- Protects User Equipment from Lightning and Heavy Equipment Power-line Voltage
- Reduces Electrical Noise in Measured Signals
- Convenient System Expansion and Repair
- Signal Filtering in Noisy Environments
- Simplifies Sensor Interface and Signal Conditioning Design
- Provides Isolation of External Sensors
- Breaks Ground Loops
- Reduces EMC Concerns

APPLICATIONS

- Analog Signal Conditioning
- Industrial Process Control
- Test and Measurement
- System and Signal Monitoring
- Temperature Measurement
- Torque Measurement
- Civil Engineering
- Geotechnical Monitoring

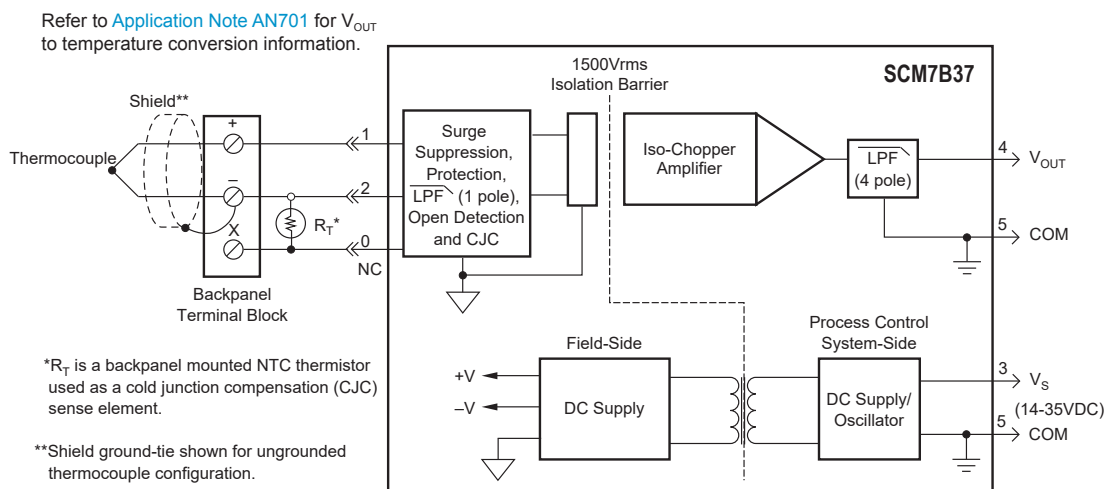

SCM7B37 Block Diagram - [For Module Dimensions and Pinouts, See Page 2-26](#)

Specifications Typical* at T_A = +25°C and +24VDC

Module	SCM7B37
Input	
Signal Range	Thermocouple ⁽¹⁾ (See Ordering Information)
Bias Current	–30nA
Resistance	
Normal	50MΩ
Power Off	30kΩ (min)
Overload	30kΩ (min)
Protection	
Continuous	120Vrms (max)
Transient	ANSI/IEEE C37.90.1
Output	
Signal Range ⁽²⁾	†
Effective Available Power ⁽²⁾	40mW
Resistance	<1Ω
Protection	Continuous Short-to-Ground
Voltage/Current Limit	±12V, ±14mA
CMV (Input-to-Output)	
Continuous	1500Vrms
Transient	ANSI/IEEE C37.90.1
CMRR (50 or 60Hz)	160dB
Accuracy ⁽³⁾	±0.03% Span (typ) ±0.1% Span (max)
Linearity ⁽⁴⁾	See Ordering Information
Stability (–40°C to +85°C)	
Gain	±35ppm/°C
Input Offset	±0.5μV/°C
Zero Suppression	±0.005%(V _Z) ⁽⁵⁾ /°C
Output Offset	±0.002% Span/°C
Noise	
Peak at 5MHz B/W	500μV
RMS at 10Hz to 100kHz B/W	250μV
Peak at 0.1Hz to 10Hz B/W	1μV RTI ⁽⁶⁾
CJC Accuracy ⁽⁷⁾	±0.25°C typ, ±1°C (max)
+5°C to +45°C ambient	
Open Input Response	Upscale
Open Input Detection Time	<10s
Frequency and Time Response	
Bandwidth, –3dB	3Hz
NMR (50/60Hz)	80/85dB
Step Response, 90% Span	165ms
Supply Voltage	14 - 35VDC
Current ⁽²⁾	12mA
Sensitivity	±0.0001%/V _S
Mechanical Dimensions (h)x(w)x(d)	2.13" x 1.705" x 0.605" (54.1mm x 43.3mm x 15.4mm)
Environmental	
Operating Temperature Range	–40°C to +85°C
Storage Temperature Range	–40°C to +85°C
Relative Humidity	0 to 95% Noncondensing
Emissions EN61000-6-4	ISM, Group 1
Radiated, Conducted	Class A
Immunity EN61000-6-2	ISM, Group 1
RF	Performance A ±0.5% Span Error
ESD, EFT	Performance B

NOTES:

*Contact factory or your local Dataforth sales office for maximum values.

(1) Thermocouple characteristics per NIST monograph 175, ITS-90.

(2) Output Range and Supply Current specifications are based on minimum output load resistance. Minimum output load resistance is calculated by V_{out}^2/P_E , where P_E is the output Effective Available Power that guarantees output range, accuracy, and linearity specifications.

(3) Accuracy includes the effects of repeatability, hysteresis, and linearity.

(4) Linearity is calculated using the best-fit straight line method.

(5) V_S is the nominal input voltage that results in a 0V output.

(6) RTI = Referenced to Input

(7) The CJC sensor accuracy should be added to the module accuracy and thermocouple accuracy to compute the overall measurement accuracy.

Ordering Information

Model†	Input Range	Accuracy ⁽³⁾		Linearity ⁽⁴⁾	
		(typ)	(max)	(typ)	(max)
SCM7B37J-01	100°C to +760°C (–148°F to +1400°F)	±0.03% (0.26°C)	±0.1% (0.86°C)	±0.01% (0.09°C)	±0.02% (0.17°C)
SCM7B37J-10	0°C to +200°C (+32°F to +392°F)	±0.03% (0.06°C)	±0.1% (0.20°C)	±0.01% (0.02°C)	±0.02% (0.04°C)
SCM7B37J-11	0°C to +400°C (+32°F to +752°F)	±0.03% (0.12°C)	±0.1% (0.40°C)	±0.01% (0.04°C)	±0.02% (0.08°C)
SCM7B37J-12	0°C to +600°C (+32°F to +1112°F)	±0.03% (0.18°C)	±0.1% (0.60°C)	±0.01% (0.06°C)	±0.02% (0.12°C)
SCM7B37J-13	300°C to +600°C (572°F to +1112°F)	±0.03% (0.09°C)	±0.1% (0.30°C)	±0.01% (0.03°C)	±0.02% (0.24°C)
SCM7B37K-02	–100°C to +1350°C (–148°F to +2462°F)	±0.03% (0.44°C)	±0.1% (1.45°C)	±0.01% (0.15°C)	±0.02% (0.29°C)
SCM7B37K-20	0°C to +300°C (+32°F to +572°F)	±0.03% (0.09°C)	±0.1% (0.30°C)	±0.01% (0.03°C)	±0.02% (0.06°C)
SCM7B37K-21	0°C to +600°C (+32°F to +1112°F)	±0.03% (0.18°C)	±0.1% (0.60°C)	±0.01% (0.06°C)	±0.02% (0.12°C)
SCM7B37K-22	0°C to +1200°C (+32°F to +2192°F)	±0.03% (0.36°C)	±0.1% (1.20°C)	±0.01% (0.12°C)	±0.02% (0.24°C)
SCM7B37K-23	600°C to +1200°C (+1112°F to +2192°F)	±0.03% (0.18°C)	±0.1% (0.60°C)	±0.01% (0.06°C)	±0.02% (0.12°C)
SCM7B37T-03	–100°C to +400°C (–148°F to +752°F)	±0.03% (0.15°C)	±0.1% (0.50°C)	±0.01% (0.05°C)	±0.02% (0.10°C)
SCM7B37E-04	0°C to +900°C (+32°F to +1652°F)	±0.03% (0.27°C)	±0.1% (0.90°C)	±0.01% (0.09°C)	±0.02% (0.18°C)
SCM7B37R-05	0°C to +1750°C (+32°F to +3182°F)	±0.03% (0.53°C)	±0.1% (1.75°C)	±0.01% (0.18°C)	±0.02% (0.35°C)
SCM7B37S-06	0°C to +1750°C (+32°F to +3182°F)	±0.03% (0.53°C)	±0.1% (1.75°C)	±0.01% (0.18°C)	±0.02% (0.35°C)
SCM7B37B-07	0°C to +1800°C (+32°F to +3272°F)	±0.03% (0.54°C)	±0.1% (1.80°C)	±0.01% (0.18°C)	±0.02% (0.36°C)

†Output Ranges Available

Output Range	Part No. Suffix	Example
+1V to +5V	NONE	SCM7B37J-01
0 to +5V	A	SCM7B37J-01A
0 to +10V	D	SCM7B37J-01D

***Thermocouple Alloy Combinations**

Standards: DIN IEC 584, ANSI MC96-1-82, JIS C 1602-1981

Type	Material
J	Iron vs. Copper-nickel
K	Nickel-chromium vs. Nickel-aluminum
T	Copper vs. Copper-nickel
E	Nickel-chromium vs. Copper-nickel
R	Platinum-13% Rhodium vs. Platinum
S	Platinum-10% Rhodium vs. Platinum
B	Platinum-30% Rhodium vs. Platinum-6% Rhodium

SCM7B39

Isolated Process Current Output Modules



DESCRIPTION

SCM7B39 process current modules accept high-level signals from the process control system and provide either 0-20mA or 4-20mA current to the field.

These modules incorporate a five-pole filtering approach to maximize both time and frequency response by taking advantage of both Thomson (Bessel) and Butterworth characteristics. One pole of the filter is on the process control system side of the isolation barrier, and the other four poles are on the field side.

After the initial process control system side filtering, the signal is chopped by a proprietary chopper circuit and transferred across the transformer isolation barrier, suppressing transmission of common mode spikes and surges. The signal is then reconstructed, filtered, and converted to a process current for output to the field.

Modules accept a wide 18-35VDC power supply range (+24VDC nominal). Their compact packages (2.13"x1.705"x0.605") save space and are ideal for high channel density applications. They are designed for easy DIN-rail mounting using any of the DIN backpanels.

FEATURES


- Accepts High-level Voltage Input
- Provides 0-20mA or 4-20mA Current Output
- 1500Vrms Transformer Isolation
- Accuracy, $\pm 0.03\%$ of Span (typ) $\pm 0.1\%$ (max)
- ANSI/IEEE C37.90.1 Transient Protection
- Output Protected to 120Vrms, Continuous
- Noise, $46\mu\text{Ap-p}$ (5MHz), $4\mu\text{Arms}$ (100kHz)
- 110dB CMRR
- Easy DIN-rail Mounting
- CSA C/US Certified
- CE and ATEX Compliant
- Manufactured per RoHS III Directive 2015/863

BENEFITS

- Small Form-factor for High-density Applications
- Protects User Equipment from Lightning and Heavy Equipment Power-line Voltage
- Reduces Electrical Noise in Measured Signals
- Convenient System Expansion and Repair
- Signal Filtering in Noisy Environments
- Simplifies Sensor Interface and Signal Conditioning Design
- Provides Isolation of External Sensors
- Breaks Ground Loops
- Reduces EMC Concerns

APPLICATIONS

- Analog Signal Conditioning
- Industrial Process Control
- Test and Measurement
- System and Signal Monitoring
- Temperature Measurement
- Torque Measurement
- Civil Engineering
- Geotechnical Monitoring

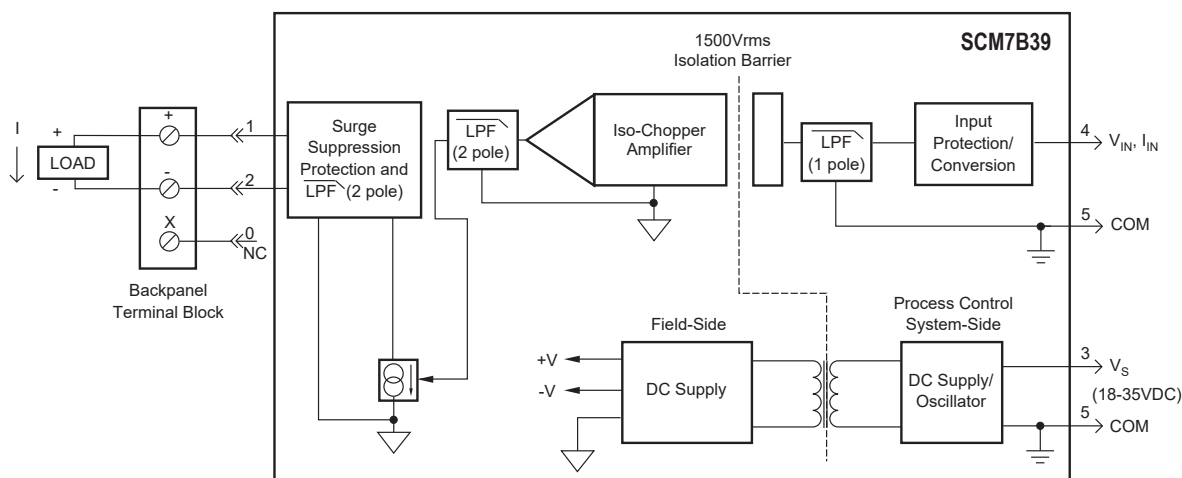

SCM7B39 Block Diagram - [For Module Dimensions and Pinouts. See Page 2-26](#)

Specifications Typical* at $T_A = +25^{\circ}\text{C}$ and +24VDC

Module	SCM7B39-01,-02,-03	SCM7B39-04
Output		
Signal Range ⁽¹⁾	4-20mA, 0-20mA	4-20mA
Effective Available Power ⁽¹⁾	320mW	320mW
Protection		
Continuous	120Vrms (max)	120Vrms (max)
Transient	ANSI/IEEE C37.90.1	ANSI/IEEE C37.90.1
Current Limit	32mA	32mA
Input		
Signal Range	1 to +5V, 0 to +10V	4-20mA
Bias Current	±1nA	N/A
Resistance		
Normal	10MΩ	270Ω
Power Off	30kΩ (min)	>20kΩ
Overload	30kΩ (min)	N/A
Protection	±35Vpeak (no damage)	±7.5V peak
Compliance	N/A	35VDC (max)
CMV (Input-to-Output)		
Continuous	1500Vrms	1500Vrms
Transient	ANSI/IEEE C37.90.1	ANSI/IEEE C37.90.1
CMRR (50 or 60Hz)	110dB	110dB
Accuracy ⁽²⁾	±0.03% Span (typ) ±0.1% Span (max)	±0.03% Span (typ) ±0.1% Span (max)
Linearity ⁽³⁾	±0.01% Span (typ) ±0.02% Span (max)	±0.01% Span (typ) ±0.02% Span (max)
Stability (−40°C to +85°C)		
Gain	±25ppm/°C	±50ppm/°C
Output Offset	±0.0035% Span/°C	±0.0045% Span/°C
Noise		
Peak at 5MHz B/W	46μA	46μA
RMS at 10Hz to 100kHz B/W	4μA	4μA
Peak at 0.1Hz to 10Hz B/W	42nA	42nA
Frequency and Time Response		
Bandwidth, −3dB	100Hz	100Hz
NMR (−3dB at 100Hz)	80dB per Decade Above 100Hz	80dB per Decade Above 100Hz
Step Response, 90% Span	5ms	5ms
Supply Voltage	18 to 35VDC	18 to 35VDC
Current ⁽¹⁾	56mA	56mA
Sensitivity	±0.0003%/V _s	±0.0003%/V _s
Mechanical Dimensions (h)x(w)x(d)	2.13" x 1.705" x 0.605" (54.1mm x 43.3mm x 15.4mm)	2.13" x 1.705" x 0.605" (54.1mm x 43.3mm x 15.4mm)
Environmental		
Operating Temperature Range	−40°C to +85°C	−40°C to +85°C
Storage Temperature Range	−40°C to +85°C	−40°C to +85°C
Relative Humidity	0 to 95% Noncondensing	0 to 95% Noncondensing
Emissions EN61000-6-4	ISM, Group 1	ISM, Group 1
Radiated, Conducted	Class A	Class A
Immunity EN61000-6-2	ISM, Group 1	ISM, Group 1
RF	Performance A ±0.5% Span Error	Performance A ±0.5% Span Error
ESD, EFT	Performance B	Performance B

NOTES:

*Contact factory or your local Dataforth sales office for maximum values.

(1) Output Range and Supply Current specifications are based on maximum output load resistance. Maximum output load resistance is calculated by P_E/I_{OUT}^2 where P_E is the Output Effective Available Power that guarantees output range, accuracy, and linearity specifications. Output effective available power is independent of supply voltage.

(2) Accuracy includes the effects of repeatability, hysteresis, and linearity.

(3) Linearity is calculated using the best-fit straight line method.

Ordering Information

Model	Input Range	Output Range
SCM7B39-01	+1 to +5V	4-20mA
SCM7B39-02	0 to +10V	0-20mA
SCM7B39-03	0 to +10V	4-20mA
SCM7B39-04	4-20mA	4-20mA

SCM7B40/41



Isolated Analog Voltage-input Modules, Wide Bandwidth

DESCRIPTION

Each SCM7B40/41 voltage-input module accepts one channel of analog voltage input which is filtered, isolated, amplified, and converted to a high-level analog voltage for output to the process control system.

These modules incorporate a five-pole filtering approach to maximize both time and frequency response by taking advantage of both Thomson (Bessel) and Butterworth characteristics. One pole of the filter is on the field side of the isolation barrier; four are on the process control system side.

After the initial field-side filtering, the input signal is chopped by a proprietary chopper circuit and transferred across the transformer isolation barrier, suppressing transmission of common mode spikes and surges. The signal is then reconstructed and filtered for process control system output.

Modules accept a wide 14-35VDC power supply range (+24VDC nominal). Their compact packages (2.13"x1.705"x0.605") save space and are ideal for high channel density applications. They are designed for easy DIN-rail mounting using any of the DIN backpanels.

FEATURES


- Accepts Millivolt or Voltage Inputs
- Provides High-level Voltage-outputs
- 10kHz Bandwidth
- 1500Vrms Transformer Isolation
- Accuracy, $\pm 0.03\%$ of Span (typ) $\pm 0.1\%$ (max)
- ANSI/IEEE C37.90.1 Transient Protection
- Input Protected to 120Vrms, Continuous
- Noise, 2mVp-p (5MHz), 1mVrms (100kHz)
- Up to 110dB CMRR
- Easy DIN-rail Mounting
- CSA C/US Certified
- CE and ATEX Compliant
- Manufactured per RoHS III Directive 2015/863

BENEFITS

- Small Form-factor for High-density Applications
- Protects User Equipment from Lightning and Heavy Equipment Power-line Voltage
- Reduces Electrical Noise in Measured Signals
- Convenient System Expansion and Repair
- Signal Filtering in Noisy Environments
- Simplifies Sensor Interface and Signal Conditioning Design
- Provides Isolation of External Sensors
- Breaks Ground Loops
- Reduces EMC Concerns

APPLICATIONS

- Analog Signal Conditioning
- Industrial Process Control
- Test and Measurement
- System and Signal Monitoring
- Temperature Measurement
- Torque Measurement
- Civil Engineering
- Geotechnical Monitoring

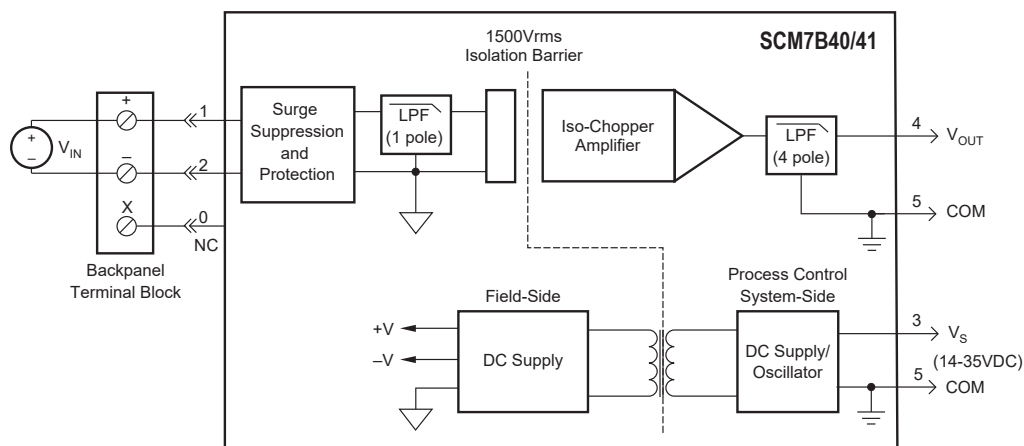

SCM7B40/41 Block Diagram - [For Module Dimensions and Pinouts, See Page 2-26](#)

Specifications Typical* at T_A = +25°C and +24VDC

Module	SCM7B40	SCM7B41
Input		
Signal Range	–1V to +1V	–10V to +40V
Bias Current	±1nA	±0.1nA
Resistance		
Normal	50MΩ	500kΩ (min)
Power Off	30kΩ (min)	500kΩ (min)
Overload	30kΩ (min)	500kΩ (min)
Protection		
Continuous Transient	120Vrms (max) ANSI/IEEE C37.90.1	120Vrms (max) ANSI/IEEE C37.90.1
Output		
Signal Range ⁽¹⁾	†	†
Effective Available Power ⁽¹⁾	40mW	40mW
Resistance	<1Ω	<1Ω
Protection		
Voltage/Current Limit	Continuous Short-to-Ground ±12V, ±14mA	Continuous Short-to-Ground ±12V, ±14mA
CMV (Input-to-Output)		
Continuous	1500Vrms	1500Vrms
Transient	ANSI/IEEE C37.90.1	ANSI/IEEE C37.90.1
CMRR (50 or 60Hz)	110dB	110dB
Accuracy ⁽²⁾	±0.03% Span (typ) ±0.1% Span (max)	±0.03% Span (typ) ±0.1% Span (max)
Linearity ⁽³⁾	±0.01% Span (typ) ±0.02% Span (max)	±0.01% Span (typ) ±0.02% Span (max)
Stability (–40°C to +85°C)		
Gain	±35ppm/°C	±55ppm/°C
Input Offset	±0.5μV/°C	±5μV/°C
Zero Suppression	±0.005%(V _Z) ⁽⁴⁾ /°C	±0.005%(V _Z) ⁽⁴⁾ /°C
Output Offset	±0.002% Span/°C	±0.002% Span/°C
Noise		
Peak at 5MHz B/W	2mV	2mV
RMS at 10Hz to 100kHz B/W	1mV	1mV
Peak at 0.1Hz to 10Hz B/W	1μV RTI ⁽⁵⁾	1μV RTI ⁽⁵⁾
Frequency and Time Response		
Bandwidth, –3dB	10kHz	10kHz
NMR	80dB per Decade above 10kHz	80dB per Decade above 10kHz
Step Response, 90% Span	50μs	50μs
Supply Voltage	14 - 35VDC	14 - 35VDC
Current ⁽¹⁾	12mA	12mA
Sensitivity	±0.0001%/V _S	±0.0001%/V _S
Mechanical Dimensions (h)x(w)x(d)	2.13" x 1.705" x 0.605" (54.1mm x 43.3mm x 15.4mm)	2.13" x 1.705" x 0.605" (54.1mm x 43.3mm x 15.4mm)
Environmental		
Operating Temperature Range	–40°C to +85°C	–40°C to +85°C
Storage Temperature Range	–40°C to +85°C	–40°C to +85°C
Relative Humidity	0 to 95% Noncondensing	0 to 95% Noncondensing
Emissions EN61000-6-4	ISM, Group 1	ISM, Group 1
Radiated, Conducted	Class A	Class A
Immunity EN61000-6-2	ISM, Group 1	ISM, Group 1
RF	Performance A ±0.5% Span Error	Performance A ±0.5% Span Error
ESD, EFT	Performance B	Performance B

NOTES:

*Contact factory or your local Dataforth sales office for maximum values.

(1) Output Range and Supply Current specifications are based on minimum output load resistance. Minimum output load resistance is calculated by V_{OUT}^2/P_E , where P_E is the Output Effective Available Power that guarantees output range, accuracy, and linearity specifications.

(2) Accuracy includes the effects of repeatability, hysteresis, and linearity.

(3) Linearity is calculated using the best-fit straight line method.

(4) V_Z is the nominal input voltage that results in a 0V output.

(5) RTI = Referenced to Input.

Ordering Information

Model	Input Range
SCM7B40-02	0 to +100mV
SCM7B40-03	0 to +1V
SCM7B40-07	±100mV
SCM7B40-08	±1V
SCM7B41-01	0 to +10V
SCM7B41-02	±5V
SCM7B41-03	10V
SCM7B41-04	0 to +5V
SCM7B41-05	0 to +20V
SCM7B41-06	0 to +40V

†Output Ranges Available

Output Range	Part No. Suffix	Example
+1V to +5V	NONE	SCM7B40-02
0 to +5V	A	SCM7B40-02A
0 to +10V	D	SCM7B40-02D

SCM7B47

Isolated Linearized Thermocouple-input Modules



DESCRIPTION

SCM7B47 modules accept a single channel of input from Type J, K, T, E, R, S, B, or N thermocouples. The signal is filtered, isolated, amplified, linearized, and converted to a high-level analog voltage for output to the process control system.

Linearization is achieved by creating a non-linear transfer function through the module itself; refer to [Application Note AN505](#). This non-linear transfer function is configured at the factory and is designed to be equal and opposite to the thermocouple non-linearity.

Cold junction compensation (CJC) is performed using an NTC thermistor (see "Additional SCM7B Part Numbers" section for P/N and [Application Note AN701](#) for further information) externally mounted under the field-side terminal block on the backpanel (Figure below). Open thermocouple detection is upscale using a 30nA current source in the input circuitry.

These modules incorporate a five-pole filtering approach to maximize both time and frequency response by taking advantage of both Thomson (Bessel) and Butterworth characteristics. One pole of the filter is on the field side of the isolation barrier; four are on the process control system side.

After the initial field-side filtering, the input signal is chopped by a proprietary chopper circuit and transferred across the transformer isolation barrier, suppressing transmission of common-mode spikes and surges. The signal is then reconstructed and filtered for process control system output.

Modules accept a wide 14-35VDC power supply range (+24VDC nominal). Their compact packages (2.13"x1.705"x0.605") save space and are ideal for high channel density applications. They are designed for easy DIN-rail mounting using any of the DIN backpanels.

FEATURES


- Interfaces to Type J, K, T, E, R, S, B, and N Thermocouples
- Linearizes Thermocouple Signals
- Provides High-level Voltage-outputs
- 1500Vrms Transformer Isolation
- Accuracy, $\pm 0.06\%$ to $\pm 0.16\%$ of Span (typ)
- ANSI/IEEE C37.90.1 Transient Protection
- Input Protected to 120Vrms, Continuous
- 1mVp-p (5MHz), 500 μ Vrms (100kHz) Noise
- 160dB CMRR
- 85dB NMR at 60Hz, 80dB at 50Hz
- Easy DIN-rail Mounting
- CSA C/US Certified
- CE and ATEX Compliant
- Manufactured per RoHS III Directive 2015/863

BENEFITS

- Small Form-factor for High-density Applications
- Protects User Equipment from Lightning and Heavy Equipment Power-line Voltage
- Reduces Electrical Noise in Measured Signals
- Convenient System Expansion and Repair
- Signal Filtering in Noisy Environments
- Provides Isolation of External Sensors
- Breaks Ground Loops
- Reduces EMC Concerns

APPLICATIONS

- Analog Signal Conditioning
- Industrial Process Control
- Test and Measurement
- System and Signal Monitoring
- Temperature Measurement
- Torque Measurement
- Civil Engineering
- Geotechnical Monitoring

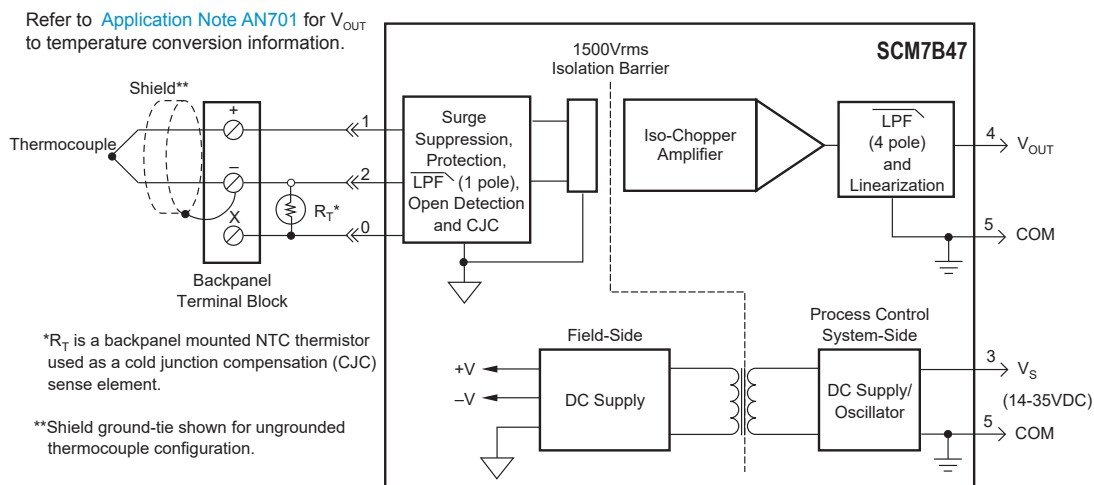

SCM7B47 Block Diagram - [For Module Dimensions and Pinouts, See Page 2-26](#)

Specifications Typical* at T_A = +25°C and +24VDC

Module	SCM7B47
Input	
Signal Range	Thermocouple ⁽¹⁾ (See Ordering Information) –30nA
Current	
Resistance	50MΩ
Normal	30kΩ (min)
Power Off	30kΩ (min)
Overload	
Protection	120Vrms (max)
Continuous	ANSI/IEEE C37.90.1
Transient	
Output	
Signal Range ⁽²⁾	↑
Effective Available Power ⁽²⁾	40mW
Resistance	<1Ω
Protection	Continuous Short-to-Ground
Voltage/Current Limit	±12V, ±14mA
CMV (Input-to-Output)	
Continuous	1500Vrms
Transient	ANSI/IEEE C37.90.1
CMRR (50 or 60Hz)	160dB
Accuracy ⁽³⁾	(See Ordering Information)
Stability (–40°C to +85°C)	
Gain	±40ppm/°C
Input Offset	±0.5μV/°C
Zero Suppression	±0.005%(V _Z) ⁽⁴⁾ /°C
Output Offset	±0.002% Span/°C
Noise	
Peak at 5MHz B/W	1mV
RMS at 10Hz to 100kHz B/W	500μV
Peak at 0.1Hz to 10Hz B/W	1μV RTI ⁽⁵⁾
CJC Accuracy ⁽⁶⁾	±0.25°C Typ, ±1°C (max)
+5°C to +45°C ambient	
Open Input Response	Upscale
Open Input Detection Time	<10s
Frequency and Time Response	
Bandwidth, –3dB	3Hz
NMR (50/60Hz)	80/85dB
Step Response, 90% Span	165ms
Supply Voltage	14 - 35VDC
Current ⁽²⁾	16mA
Sensitivity	±0.0001%/°V _S
Mechanical Dimensions	2.13" x 1.705" x 0.605"
(h)x(w)x(d)	(54.1mm x 43.3mm x 15.4mm)
Environmental	
Operating Temperature Range	–40°C to +85°C
Storage Temperature Range	–40°C to +85°C
Relative Humidity	0 to 95% Noncondensing
Emissions EN61000-6-4	ISM, Group 1
Radiated, Conducted	Class A
Immunity EN61000-6-2	ISM, Group 1
RF	Performance A ±0.5% Span Error
ESD, EFT	Performance B

NOTES:

*Contact factory or your local Dataforth sales office for maximum values.

(1) Thermocouple characteristics per NIST monograph 175, ITS-90.

(2) Output Range and Supply Current specifications are based on minimum output load resistance. Minimum output load resistance is calculated by V_{out}^2/P_E , where P_E is the output Effective Available Power that guarantees output range, accuracy, and linearity specifications.

(3) Accuracy includes the effects of repeatability, hysteresis, and conformity.

(4) V_Z is the nominal input voltage that results in a 0V output.

(5) RTI = Referenced to Input.

(6) The CJC sensor accuracy should be added to the module accuracy and thermocouple accuracy to compute overall measurement accuracy.

Ordering Information

Model†	Input Range	Accuracy ⁽³⁾⁽⁵⁾	
		(typ)	(max)
SCM7B47J-01	0°C to +760°C (+32°F to +1400°F)	±0.11% Span (0.84°C)	±0.32% Span (3.43°C)
SCM7B47J-02	–100°C to +300°C (–148°F to +572°F)	±0.10% Span (0.40°C)	±0.30% Span (1.20°C)
SCM7B47K-03	0°C to +1300°C (+32°F to +2372°F)	±0.11% Span (1.43°C)	±0.32% Span (4.16°C)
SCM7B47K-04	0°C to +600°C (+32°F to +1112°F)	±0.06% Span (0.36°C)	±0.18% Span (1.08°C)
SCM7B47T-05	0°C to +400°C (+32°F to +752°F)	±0.13% Span (0.52°C)	±0.38% Span (1.52°C)
SCM7B47T-06	–100°C to +200°C (–148°F to +392°F)	±0.16% Span (0.48°C)	±0.47% Span (1.41°C)
SCM7B47E-07	0°C to +900°C (+32°F to +1652°F)	±0.11% Span (0.99°C)	±0.34% Span (3.06°C)
SCM7B47R-08	+500°C to +1750°C (+932°F to +3182°F)	±0.10% Span (1.25°C)	±0.30% Span (3.75°C)
SCM7B47S-09	+700°C to +1750°C (+1292°F to +3182°F)	±0.08% Span (0.84°C)	±0.25% Span (2.63°C)
SCM7B47B-10	+800°C to +1800°C (+1472°F to +3272°F)	±0.12% Span (1.20°C)	±0.35% Span (3.50°C)
SCM7B47N-11	+200°C to +1300°C (+392°F to +2372°F)	±0.09% Span (0.99°C)	±0.27% Span (2.97°C)

†Output Ranges Available

Output Range	Part No. Suffix	Example
+1 to +5V	NONE	SCM7B47J-01
0 to +5V	A	SCM7B47J-01A
0 to +10V	D	SCM7B47J-01D

‡Thermocouple Alloy Combinations

Standards: DIN IEC 584, ANSI MC96-1-82, JIS C 1602-1981


Type	Material
J	Iron vs. Copper-nickel
K	Nickel-chromium vs. Nickel-aluminum
T	Copper vs. Copper-nickel
E	Nickel-chromium vs. Copper-nickel
R	Platinum-13% Rhodium vs. Platinum
S	Platinum-10% Rhodium vs. Platinum
B	Platinum-30% Rhodium vs. Platinum-6% Rhodium
C	Tungsten-5% Rhenium vs. Tungsten-26% Rhenium
N	Nickel-14.2% Chromium-1.4% Silicon vs. Nickel-4.4% Silicon-0.1% Magnesium

SCM7B

Module Dimensions and Pinouts

The following mechanical drawing is useful if designing circuit boards to mount the SCM7B modules. Many sockets are available which accept the mounting pins. As an example, AMP Inc. provides a socket with part number [50865-5](#).

The captive nut for the 4-40 mounting screw can be obtained from PEM (Penn Engineering and Manufacturing), part number [KFS2-440](#).

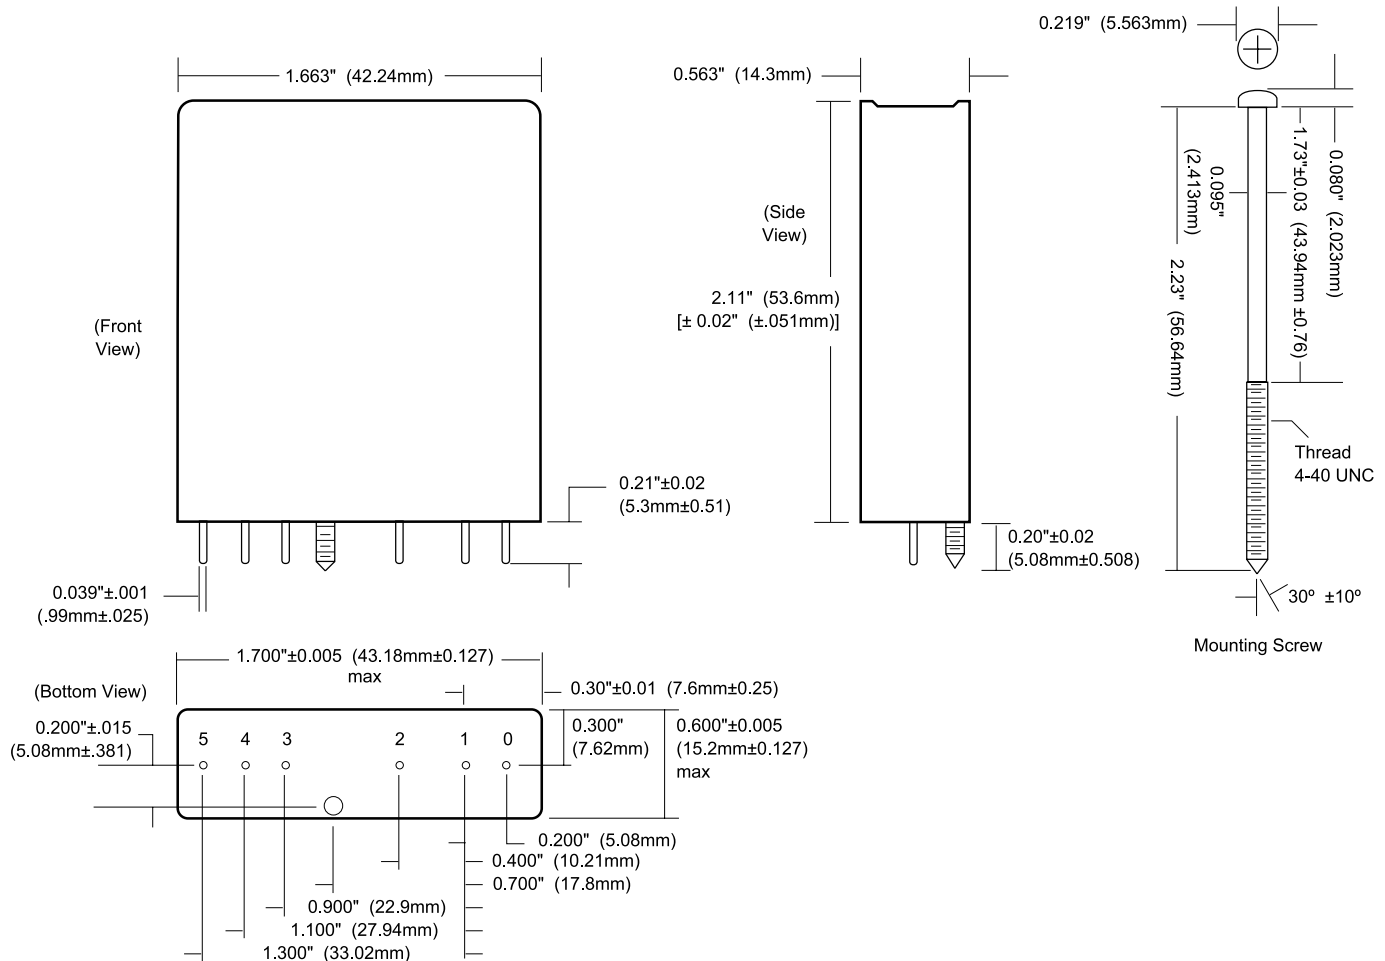

NOTES: 1) All dimensions are "Typical" unless otherwise noted.
 2) Mounting pin plating is 20µ in. gold.

SCM7B Module Dimensions

Input Module		Output Module
Excitation (7B34, 36, 37, 47) x	0	NC
Input High +	1	+ Output High
Input Low -	2	- Output Low
DC Power Supply V_S	3	V_S DC Power Supply
Output Voltage V_O	4	V_{IN} Input Voltage/Current
Common COM	5	COM Common

(Bottom View)

SCM7B Pinouts

Accessories for SCM7B Analog Modules

SCM7BXEV

Single-channel, Module-evaluation Backpanel

DESCRIPTION

The SCM7BXEV (Figures 1 and 2) is a single-channel backpanel that can accept any of the SCM7B analog modules. It is meant to be used primarily for module evaluation. Unlike multiple-channel backpanels, the single high-level system output (or input) signal is routed to all channel pins on the system interface DB25 connector. The backpanel contains four standoffs to allow mounting, using a #6 or smaller screw.

System Side - Power

Using the “V+” supply input, the power supply voltage can be as little as +14VDC. If +15VDC is available, it is recommended that the supply be connected between the “V+A” or “V+B” connections and “COM”; this will protect the module against accidental supply reversal. Using both these connections with two power supplies enables redundant operation. It is also recommended that a diode transient absorber be installed to reduce power supply transient events from degrading system performance. An “accessory” location, between the supply and common lines, is provided for this purpose. The backpanel is fused at 1/4 Amp for module protection.

System Side - Signal

The SCM7BXEV uses either the SCM7BXCA01 (DB25-to-26-pin adapter cable) and SCMXCA004-XX (26-pin-to-26-pin interface cable), or the SCM7BXCA02 (DB25 to DB25 interface cable), depending on system requirements.

Field Side - Signal

On the field side, a temperature sensor is mounted underneath the field side terminal block to provide cold junction compensation for thermocouple modules, and a current-to-voltage conversion resistor (P/N SCM7BXR1) socketing location is provided (supplied with SCM7B33 modules). Field connections are terminated with three screw terminals.

Specifications

Operating Temperature	–40°C to +85°C
Relative Humidity	95% Noncondensing
Interface Connector:	
Field	High-density Screw Clamp, 10-24 AWG
System	DB25 (male) with 4-40 Screw Locks and High-density Screw Clamp, 10-24 AWG

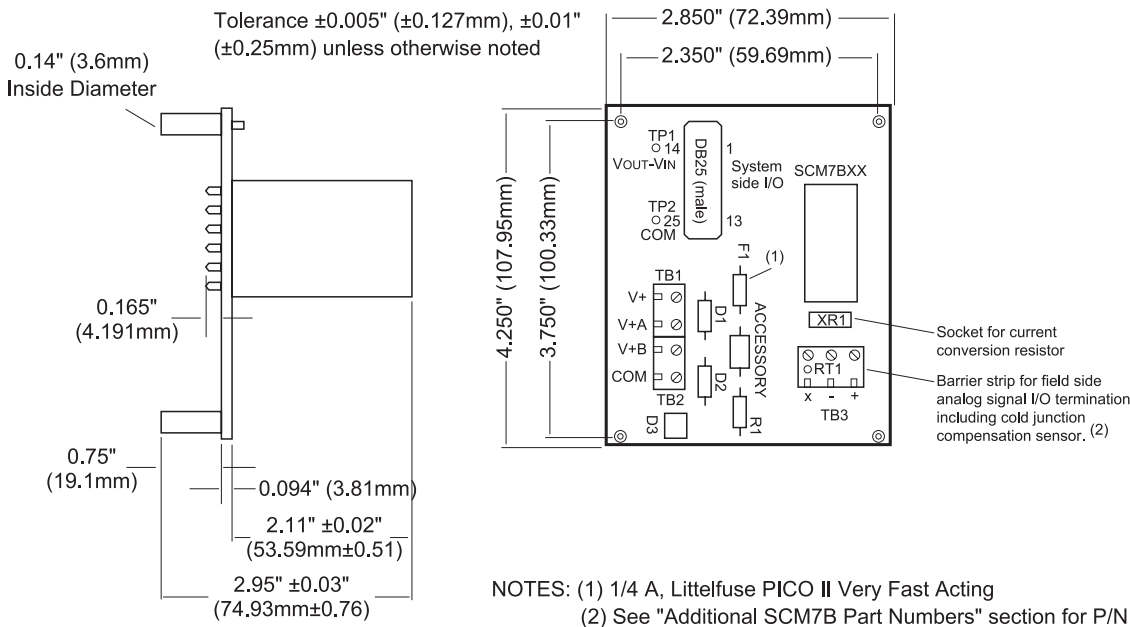


Figure 1: SCM7BXEV Dimensions

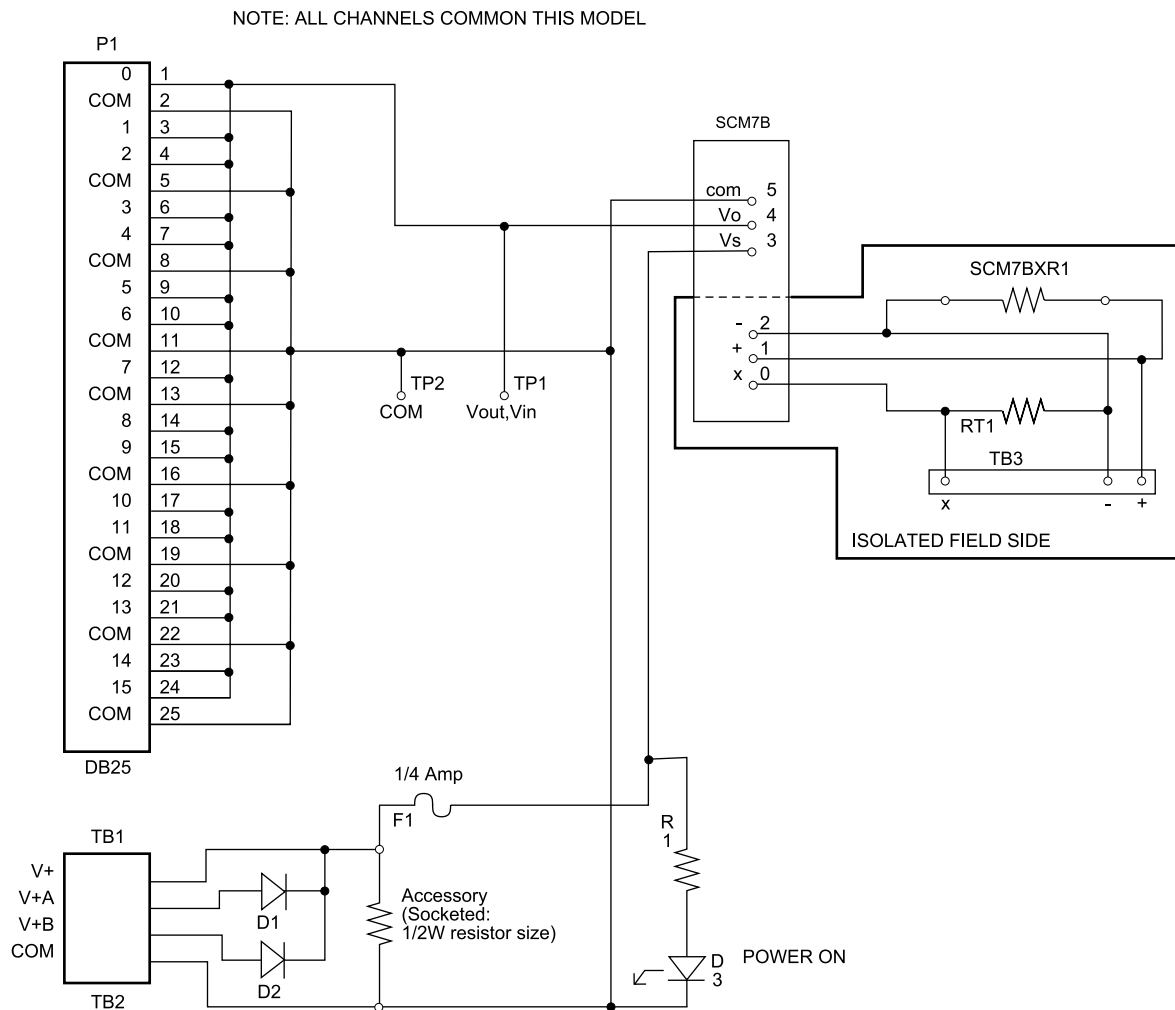


Figure 2: SCM7BxEV Schematic Diagram

SCM7BP01/SCM7BP02

1- and 2-channel Backpanels



DESCRIPTION

The SCM7BP01 (Figure 1) and SCM7BP02 (Figure 2) are 1- and 2-channel backpanels. Unlike other backpanels available, both the system and field side sides have screw terminal connectors able to accept discrete wire (10-24AWG). The backpanels can be ordered with standoffs to allow mounting, using a #6 or smaller screw, or with DIN-rail mounting hardware.

System Side - Power

Both backpanels accept 14-35VDC between "V+" and "COM" using a screw terminal (10-24AWG) block. No reverse supply diodes are provided with this model, but both are fused at 1/4 Amp (01) or 1/2 Amp (02) for module protection.

Field Side - Signal

On the field side, a temperature sensor is mounted underneath the field-side terminal block to provide cold junction compensation for thermocouple modules, and a current-to-voltage conversion resistor (P/N SCM7BXR1) socket location is provided (supplied with SCM7B33 modules).

FEATURES

- 1- and 2-channel Backpanels
- Panel or DIN-rail Mounting Options
- Interface Cables
- Cable-to-screw-terminal Interface Board
- Power Supplies

BENEFITS

- Easy Installation
- 1500Vrms, Continuous Isolation (max)
- Both System- and Field-side sides have Screw Terminal Connectors Able to Accept Discrete wire (10-24 AWG)

Specifications

Operating Temperature	-40°C to +85°C
Relative Humidity	95% Noncondensing
Interface Connector:	
Field	High-density Screw Clamp, 10-24 AWG
System	High-density Screw Clamp, 10-24 AWG
Isolation:	
Input-to-Output	1500Vrms, Continuous (max)
Channel-to-Channel	1500Vrms, Continuous (max)

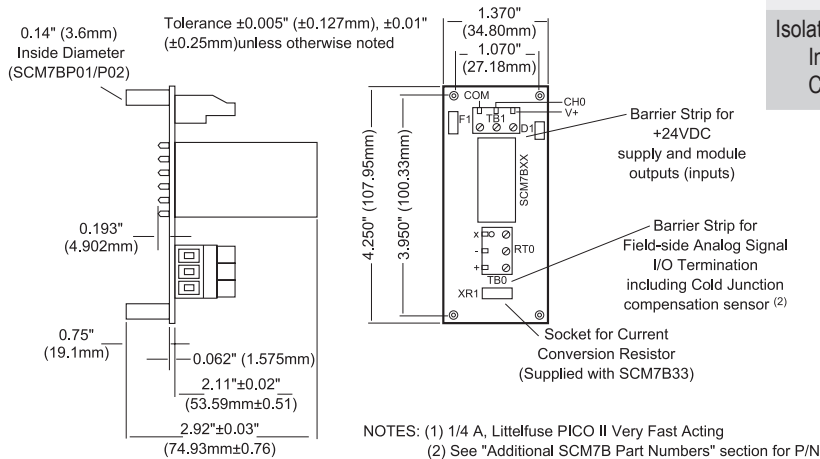


Figure 1: SCM7BP01 Dimensions

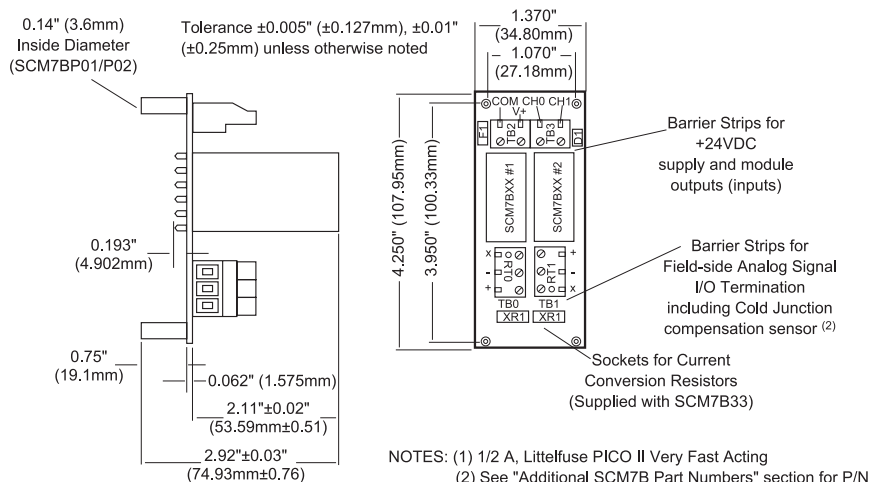


Figure 2: SCM7BP02 Dimensions

SCM7BP01-DIN/SCM7BP02-DIN

Panels and DIN-rail Mounting Accessories



DESCRIPTION

The SCM7BP01 and SCM7BP02 are single- and dual-channel mounting panels for the SCM7B modules. Both have options for standoffs or DIN-rail mounting.

The following accessories are required for DIN-rail mounting one SCM7BP01 or SCM7BP02 panel (Figure 1):

Qty	Model	Description
1	SCMXBEFE	Base Element with Snap Foot
2	SCMXSE	Side Element

The following accessories are required for DIN-rail mounting two or more SCM7BP01-4 or SCM7BP02-4 panels:

Qty	Model	Description
2	SCMXBEFE	Base Element with Snap Foot
2	SCMXSE	Side Element
(# panels) - 2	SCMXBE	Base Element without Snap Foot
(4 x (# panels))-4	SCMXVS	Connection Pins

The following DIN-rail styles are available. Specify length in meters (-XX).

SCMXRAIL1-XX DIN EN 50022-35x7.5 (slotted steel)

SCMXRAIL2-XX DIN EN 50035-G32 (slotted steel)

SCMXRAIL3-XX DIN EN 50022-35x15 (slotted steel)

Ordering Information

Part Number	Description
SCM7BP01	Single-channel Backpanel with Standoffs for Mounting.
SCM7BP01-4	Single-channel Backpanel. No Mounting Hardware Included.
SCM7BP01-DIN	Single-channel Backpanel with Din-rail Mounting Hardware. <i>(Shipped Fully Assembled)</i> .
SCM7BP02	Dual-channel Backpanel with Standoffs for Mounting.
SCM7BP02-4	Dual-channel Backpanel. No Mounting Hardware Included.
SCM7BP02-DIN	Dual-channel Backpanel with Din-rail Mounting Hardware. <i>(Shipped Fully Assembled)</i> .

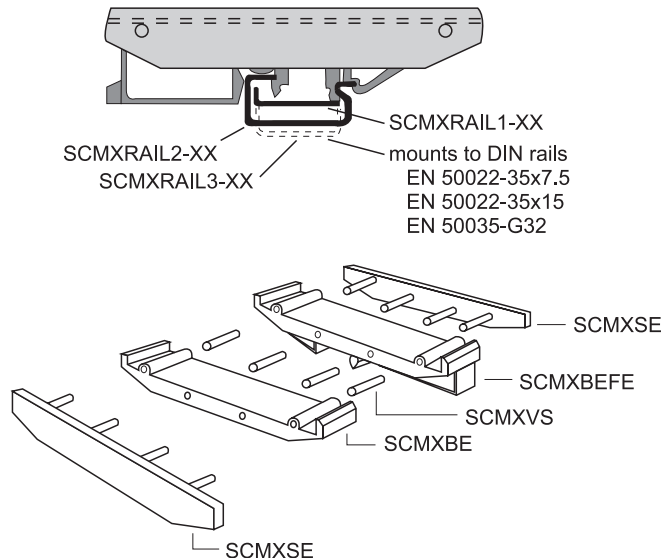


Figure 1: DIN-rail Mounting Elements

The diagram illustrates a 2-channel isolated field module. It consists of two channels, CHANNEL 0 and CHANNEL 1, each with a terminal block (TB0, TB1) and a relay (SCM7BXR1). Channel 0 is connected to TB3 (CH1, CH0) and TB2 (V+, COM). Channel 1 is connected to TB3 (CH1, CH0) and TB2 (V+, COM). Both channels have a 1/2 Amp fuse (F1) and an LED (D1) in series with the COM line. The isolated field side shows the internal wiring of the relays and terminal blocks.

www.dataforth.com

SCM7BP04(-DIN)/SCM7BP08(-DIN)/SCM7BP16(-DIN)

4-, 8-, and 16-channel Backpanels



DESCRIPTION

The SCM7BP04, SCM7BP08, and SCM7BP16 (see Figures 1-4) are 4, 8, & 16 channel backpanels that can accept any of the SCM7B analog modules. All three of these backpanels can either be rack mounted using Dataforth's 19-inch rack P/N SCM7XRK-002 (using the provided 3mm screws), or directly mounted to a surface using #6 or smaller screws. The SCM7BP04-DIN, SCM7BP08-DIN, and SCM7BP16-DIN are identical to the SCM7BP04, SCM7BP08, and SCM7BP16, but with DIN-rail mounting clips attached instead of standoffs. These brackets allow the backpanels to be mounted on either EN 50022-35 x 7.5 (35 x 15) or EN 50035-G32 type DIN-rails.

System Side - Power

Using the "V+" power supply input, the power supply voltage can be as little as +14VDC. If +15VDC is available, it is recommended that the supply be connected between the "V+A" or "V+B" connections and "COM"; this will protect the modules against accidental supply reversal. Using both these connections with two power supplies enables redundant power supply operation. It is also recommended that a diode transient absorber be installed to reduce power supply transient events from degrading system performance. An "accessory" location, between the supply and common lines, is provided for this purpose. A system side grounding #10-32 stud is also provided for use if desired. All backpanels are fused according to channel count, allowing 1/4 Amp per channel.

System Side - Signal

Two system interface DB25 connectors are used, to enable using both input and output modules simultaneously, or to route the signal from an input module backplane to an output module backplane. These backpanels use either the SCM7BXCA01 (DB25-to-26-pin adapter cable) and SCM7XCA004-XX (26-pin-to-26-pin interface cable), or the SCM7BXCA02 (DB25-to-DB25 interface cable), depending on system requirements.

Field Side - Signal

On the field-side, a temperature sensor is mounted underneath the field-side terminal block to provide cold junction compensation for Thermocouple-input modules. A current-to-voltage conversion resistor (P/N SCM7BXR1, supplied with SCM7B33 modules) socket is provided for each channel. Field connections are terminated with three screw terminals at each module site.

FEATURES

- 4-, 8-, 16-channel Backpanels
- Rack or DIN-rail Mounting Options
- All Backpanels Fused, Allowing 1/4 Amp per Channel
- Interface Cables
- Power Supplies

BENEFITS

- Easy Installation
- System Side Grounding Option Provided
- System Side – Power: Redundant Power Supply Operation Possible
- System Side – Signal: Two DB25 System Interface Connectors Available
- Field Side – Signal: Temp Sensor Provides CJC for Thermocouple Input Modules

Specifications

Operating Temperature	–40°C to +85°C
Relative Humidity	95% Noncondensing
Interface Connector	
Field	High-density Screw Clamp, 10-24 AWG
System	2 DB25 (male) Connectors with 4-40 Screw Locks
Isolation	
Input-to-Output	1500Vrms, Continuous (max)
Channel-to-Channel	1500Vrms, Continuous (max)

Ordering Information

Part Number	Description
SCM7BP04	4-channel Backpanel with Standoffs for Mounting.
SCM7BP04-DIN	4-channel Backpanel with Din-rail Mounting Clips. <i>(Shipped Fully Assembled).</i>
SCM7BP08	8-channel Backpanel with Standoffs for Mounting.
SCM7BP08-DIN	8-channel Backpanel with Din-rail Mounting Clips. <i>(Shipped Fully Assembled).</i>
SCM7BP16	16-channel Backpanel with Standoffs for Mounting.
SCM7BP16-DIN	16-channel Backpanel with Din-rail Mounting Clips. <i>(Shipped Fully Assembled).</i>

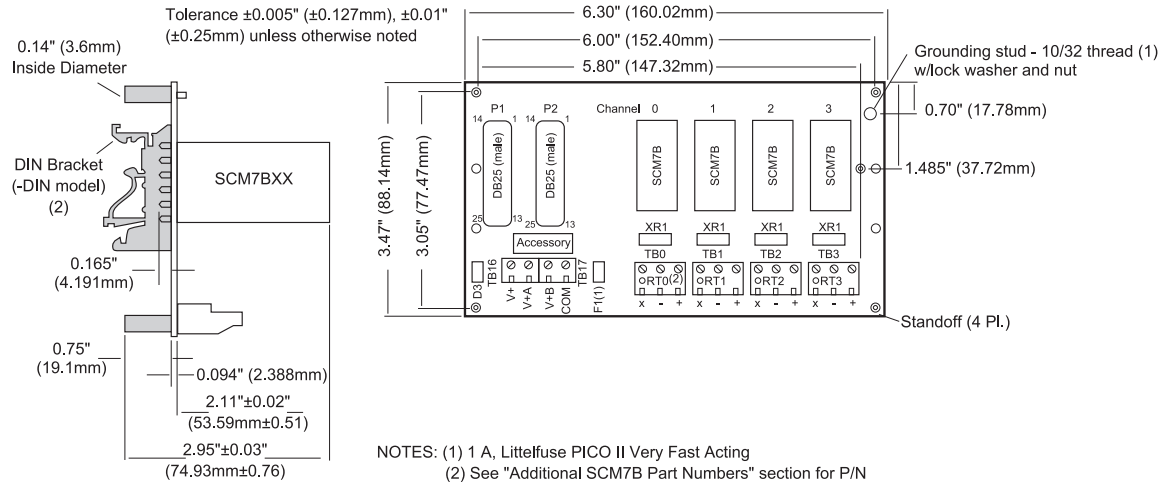


Figure 1: SCM7BP04(-DIN) Dimensions

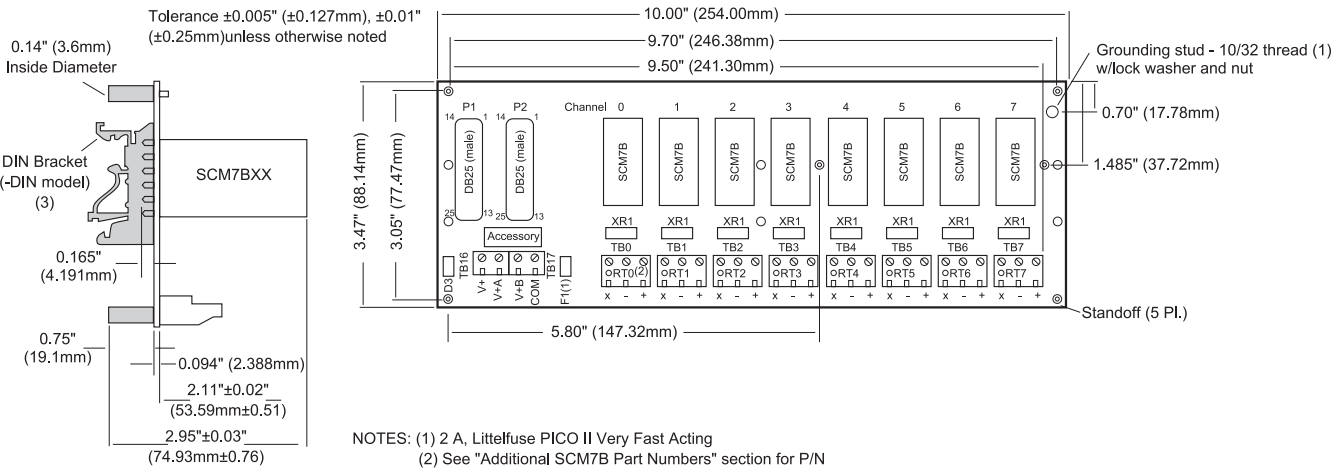


Figure 2: SCM7BP08(-DIN) Dimensions

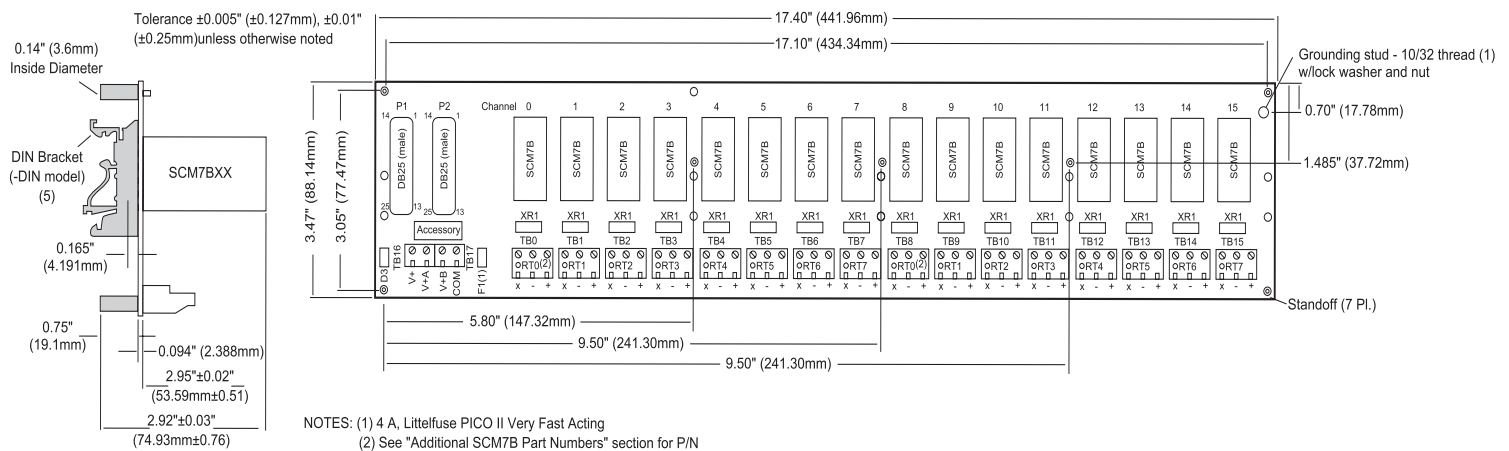


Figure 3: SCM7BP16(-DIN) Dimensions

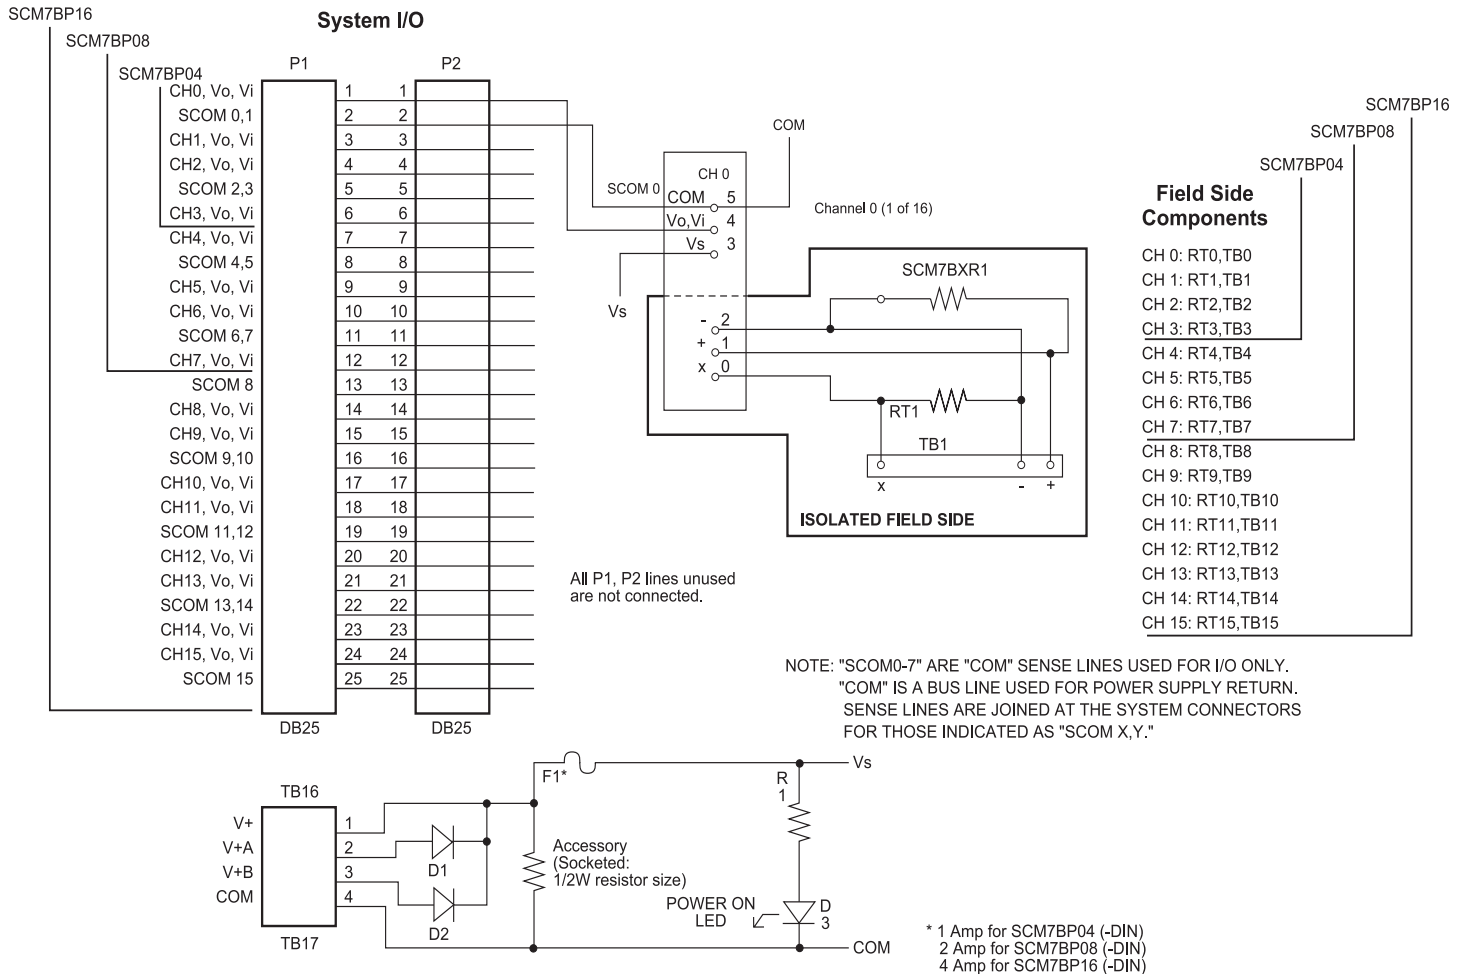



Figure 4: SCM7BP04/08/16(-DIN) Schematic Diagram

SCMXRK-002

19-inch Metal Mounting Rack

DESCRIPTION

The SCMXRK-002 is a 19-inch metal rack for mounting the SCM7BP04/08/16, SCMPB01/02/05/06, SCMAS-PB8/PB16, and isoLynx® SLX200-xx backpanels. It also provides capability to mount a system power supply and the universal interface board, P/N SCMXIF. (See Figure for dimensions).

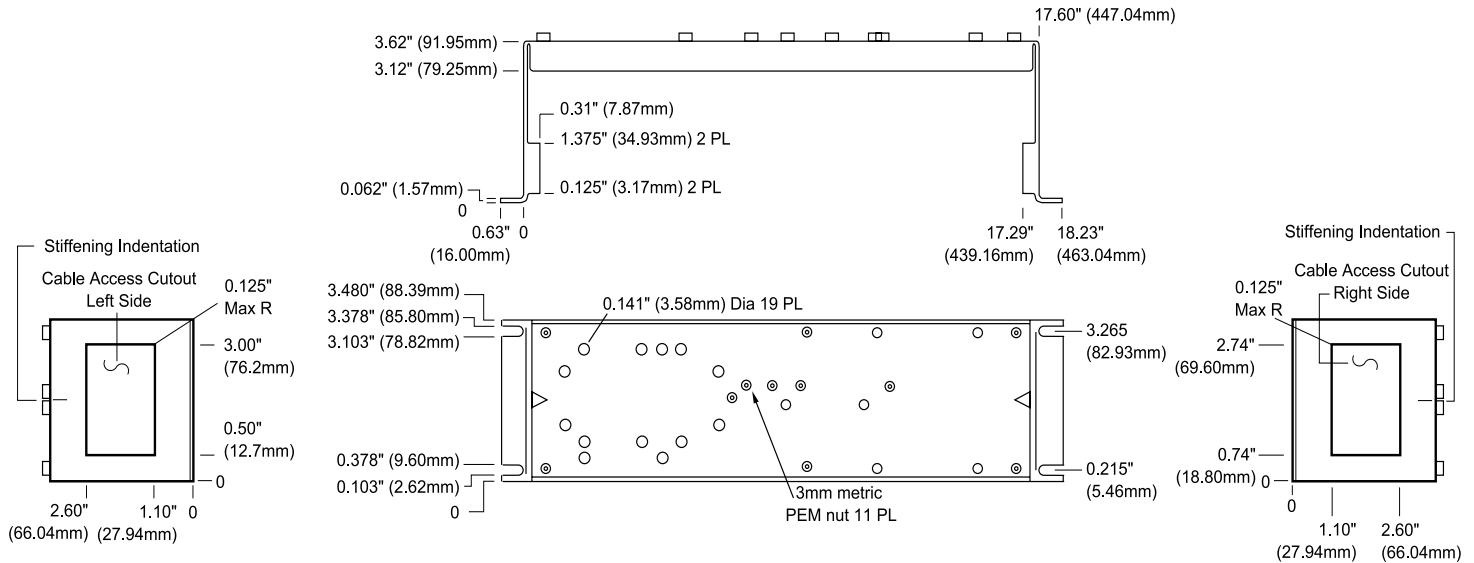

SCMXRK-002 Analog Rack Dimensions


SCMXCA006-01, -02, -07

Interface Cables

DESCRIPTION

SCMXCA006-XX

System interface cable for the SCM7BP04/08/16 backpanels. This is a DB25 Male/Female cable assembly. It can be ordered in lengths of 1m, 2m, and 7m.

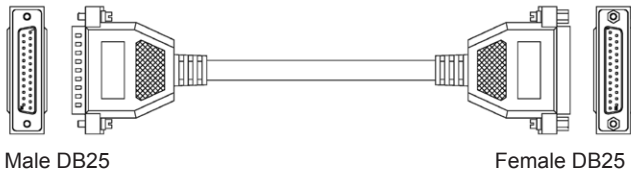

SCMXCA006-XX System Interface Cable


SCM7BXR1

Current-to-Voltage Conversion Resistor



DESCRIPTION

The SCM7BXR1 current-to-voltage conversion resistor (250Ω, 0.1%, 10ppm) is used with the SCM7B33 voltage input modules. Sockets are provided on all backpanels to allow installation of this resistor. Other values are available; consult the factory for ordering details and specifications.

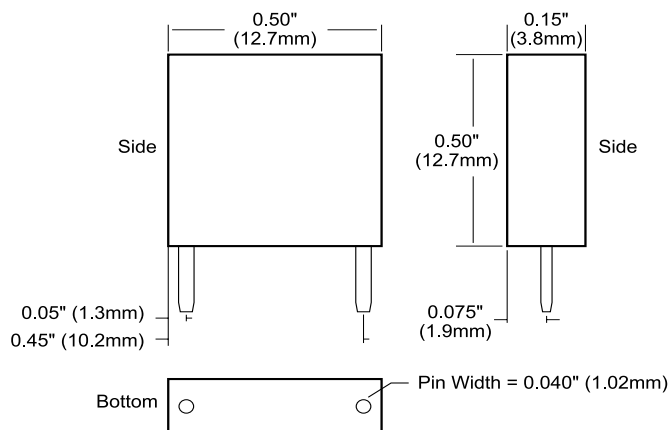


SCM7BXR1 Dimensions

8BXIF (-DIN)

Universal Interface Board

DESCRIPTION

The 8BXIF is a universal interface board which converts a DB25 cable input to 25 screw terminals for discrete wire. It can be mounted on the back of the SCMXRK-002 mounting rack (8BXIF) or on a DIN-rail (8BXIF-DIN). Required mounting hardware is included. Use SCMXCA006-XX cable (see Figure for dimensions).

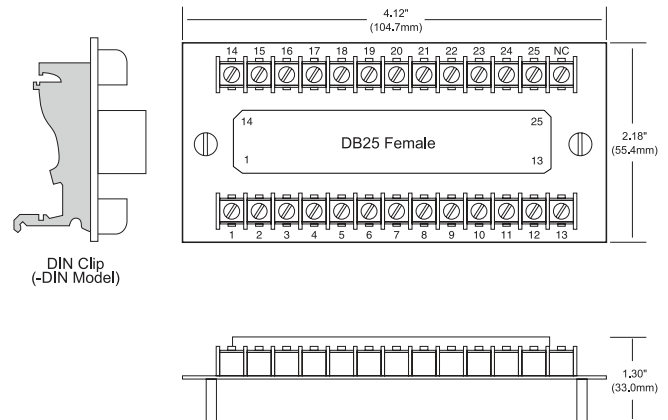

8BXIF Universal Interface Board Dimensions


SCM7BPT



Non-isolated Pass Thru Module

DESCRIPTION

The SCM7BPT is a non-isolated signal pass-through module which shorts together the signal inputs-to-outputs.

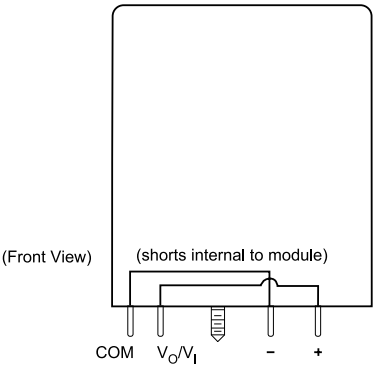

SCM7BPT Module

SCM7B-PROTO

Breadboard Kit

DESCRIPTION

The SCM7B-PROTO breadboard kit was designed to allow users to incorporate their own module functions using an SCM7B format. The kit includes a pc board designed for breadboard circuits, a module case, header and mounting screw. Contact the factory for additional information.

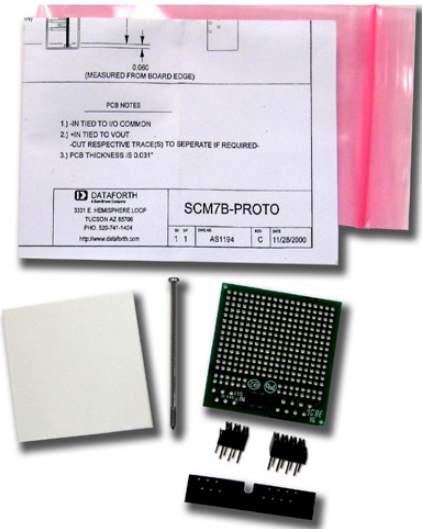


Figure 2: SCM7B-PROTO Breadboard Kit.

Additional Part Numbers of Interest

The following is a list of parts that are available for use with your SCM7B system, or for fabrication of your own backpanel, along with manufacturer's part number. Dataforth makes no claim as to availability and/or quality of parts purchased from vendors other than Dataforth.

Part Description	Part Number	Manufacturer
CJC Thermistor	100K6A1 DC95G104W	Betatherm Corp. Thermometrics
Diode Transient Absorber	SA series	General Semiconductor
Sockets for SCM7B pins	50865-5	Amp Incorporated
Module Retaining Screw Captive Nut, 4-40 Thread	KFS2-440	PEM Engineering
Grounding Stud, 0.625", 10-32 Thread	KFH 10-32-10	PEM Engineering
Axial Fuse	PICO II series	Littelfuse
2-position Termination Block	MKDS5/2-6,35	Phoenix Contact, Inc.
3-position Termination Block	MKDS5/3-6,35	Phoenix Contact, Inc.
DB25 (male) PCB Connector	745078-3	AMP Incorporated
DB25 (female) Ribbon Connector (for Custom Cables)	745078-5	AMP Incorporated
0.062" PCB Standoff	647A-5015-19	Concord
0.094" PCB Standoff	647A-5023-19	Concord

Downloads

Corporate Brochure
Full-Line Product Catalog
SCM5B/SCMHVAS Attenuator System Catalog
SCM7B Catalog
8B Catalog
DSCA Catalog
SCM9B/SCMD Catalog
MAQ®20 DAQ System Catalog
isoLYNX DAQ Systems Catalog
Loop Isolators and Transmitters Catalog
Data Communications Catalog
IoT Energy Monitoring Catalog

Press Releases

- [Dataforth Introduces Next Generation High-Voltage Attenuator System](#)
- [Latest ISO 9001:2015 Quality Standards](#)
- [Dataforth's DSCA High-Performance DIN Modules Receive Latest ATEX Certification](#)
- [Dataforth's DSCT Two-wire Transmitter Modules Receive ATEX Certification](#)

See all [PRESS RELEASES](#)

Application Notes

ENGINEERING BASICS

- [Measuring RMS Values of Voltage and Current \(AN101\)](#)
- [IC Op Amp Errors: What Are They and How Bad Can They Be \(AN102\)](#)
- [Common-Mode Voltage \(AN103\)](#)
- [4-20mA Transmitters \(AN104\)](#)
- [Practical Thermocouple Temperature Measurements \(AN107\)](#)
- [When Good Grounds Go Bad \(AN108\)](#)
- [Single Phase AC Measurements Revisited \(AN109\)](#)
- [3-Phase AC Calculations Revisited \(AN110\)](#)
- [Current Modules Measure Power Factor \(AN111\)](#)
- [Filtering in Signal Conditioning Modules, SCMs \(AN112\)](#)
- [Phase Angles and Time Delays \(AN113\)](#)
- [Accuracy versus Resolution \(AN114\)](#)
- [Sampling Law \(AN115\)](#)
- [Why Use Isolated Signal Conditioners? \(AN116\)](#)
- [Basic Bridge Circuits \(AN117\)](#)
- [Strain Gauge Signal Conditioner \(AN118\)](#)
- [Six Sigma: What? Why? How? \(AN119\)](#)
- [Wind Turbines Today \(AN120\)](#)
- [Low-pass Filter Rise Time vs Bandwidth \(AN121\)](#)
- [Introduction to PID Control \(AN122\)](#)
- [Tuning Control Loops for Fast Response \(AN123\)](#)
- [Tuning Control Loops with the IMC Tuning Method \(AN124\)](#)
- [Tuning Level Control Loops \(AN125\)](#)
- [Tuning Surge Tank Level Control Loop \(AN126\)](#)
- [Op Amp Errors, Another View \(AN127\)](#)
- [RMS Revisited \(AN128\)](#)
- [Harmonics and Utility Costs \(AN129\)](#)

SCM5B MODULES

- [Thermocouple Voltage-to-Temperature Conversion Method \(AN501\)](#)
- [SCM5B Ground Connections and Host System Interfaces \(AN502\)](#)
- [SCM5B Failure Rate Calculation and Prediction \(AN503\)](#)
- [Interpreting Drift Specifications \(AN504\)](#)
- [Hardware Linearization of Non-Linear Signals \(AN505\)](#)
- [ANSI/IEEE C37.90.1-1989 Transient Specification \(AN506\)](#)
- [Shield Grounding \(AN507\)](#)
- [Protecting Signal Lines Against EMI \(AN508\)](#)
- [SCM5B43 - DC LVDT Input Module \(AN509\)](#)

SCM7B MODULES

- [SCM7B Thermocouple Modules and CJC \(AN701\)](#)
- [SCM7B Frequency and Time Response \(AN702\)](#)
- [Failure Rate Calculation and Prediction \(AN704\)](#)

DSCA MODULES

- [DSCA Calibration Procedure \(AN801\)](#)
- [DSCA, SCM5B, SCM7B and 8B Failure Rate Calculation and Prediction \(AN802\)](#)

LDM485, RS-485 DEVICES

- [SCM9B/LDM422/LDM485 RS-485 Connection \(AN201\)](#)
- [LDM485-to-LDM485 to Other RS-485 Devices Configuration \(AN202\)](#)

MAQ®20 MODULES

- [Cross Point Switch Using MAQ20-DORLY Module \(AN901\)](#)
- [MAQ20 PID Control in a Home Heating Application \(AN902\)](#)

Tech Notes

- [Active, Analog, Elliptic Filter](#)
- [Eddy Current - Skin, and Proximity Effects](#)
- [Could We Actually Achieve “Warp Speed”?](#)
- [What is This Crest Factor Thing?](#)
- [Coulomb’s Law](#)
- [Faraday’s Law of Induction](#)
- [Power Supply Isolation](#)
- [When to Use Closed-Loop Control Instead of Open-Loop Control](#)
- [Aliasing, Anti-Aliasing - What is That Anyway?](#)
- [Made in the USA](#)
- [MAQ20 Data Acquisition System Features](#)
- [Advanced CJC Method](#)
- [MAQ20-BRDG1, Strain Gauge Bridge Module](#)
- [3-Year Warranty](#)
- [ISO9001](#)
- [Hazardous Locations in the European Union - ATEX Directive](#)
- [Hazardous Locations in North America](#)
- [Certifications](#)
- [Why Should Sensors Be Isolated](#)
- [Signal Conditioning and Alias Filters](#)
- [Low-pass Filter Rise Time vs Bandwidth](#)
- [Strain Gauge Signal Conditioners](#)
- [Why Isolate Analog Signals?](#)
- [RTD Tutorial](#)
- [Six Sigma - What? Why? How?](#)
- [Windmill Applications](#)
- [Introduction to Thermocouples](#)
- [RTD, Resistance Temperature Detector](#)
- [Shielding and Grounding](#)
- [5B for Piezo-Electric Accelerometers](#)
- [Configurable 5B Module](#)
- [Hysteresis Specifications](#)
- [Miniature Electronics... 8B Modules](#)
- [A Question from Dataforth’s President](#)
- [Unbalanced Voltages Increase Cost](#)
- [Dataforth Test Reports](#)
- [Normal Mode Rejection, NMR](#)
- [Bridge Circuit Measurements](#)
- [Signal-to-Noise Ratio, SNR](#)
- [Accuracy versus Resolution](#)
- [Filtering - Phase Angles and Time Delays](#)
- [Uncertainty Principle](#)
- [Galvanic Isolation](#)
- [Quick Reference for RS-323, -422, -423, -485](#)
- [It’s All About Isolation and Protection](#)
- [Serial Data](#)
- [Signal Conditioner with Power Supply](#)
- [Isolated I/O to Serial Data](#)
- [Loop Isolators](#)
- [Test Reports](#)
- [Measuring True RMS](#)
- [2-wire, 4-20mA Applications](#)
- [System Accessories](#)
- [Why True RMS?](#)
- [Analog-to-Serial](#)
- [Transient Protection](#)
- [Signal Conditioner Life](#)
- [Common-Mode Voltage](#)
- [Thermocouples](#)
- [5B or 7B](#)
- [DIN or 5B/7B Option](#)
- [Signal Conditioning Tutorial](#)
- [Programmable Signal Conditioning](#)
- [When Good Grounds Go Bad](#)
- [Input Resistance](#)
- [Drift Specs](#)
- [Failure Rates](#)
- [Industrial Data Acquisition](#)
- [Single Phase Revisited](#)
- [3-Phase AC Calculations Revisited](#)
- [Using Ethernet for Data Acquisition](#)
- [Linearity and Conformity](#)
- [Reproducibility - Repeatability](#)
- [Surge Withstand Capability](#)
- [Easy Recalibration Procedure](#)
- [System Throughput](#)
- [Sampling Rates and THE LAW](#)
- [Signal Conditioning Article](#)
- [Measured vs Combinational Error](#)
- [Power Supply Sensitivity](#)
- [Filtering Noise](#)
- [Filtering in Signal Conditioning Modules](#)
- [Resistor Thermal Noise](#)
- [Sampling Law](#)
- [Signal Conditioners - Buy vs Build](#)
- [Confident Strain-Gauge Measurements](#)
- [Advanced CJC Method Used in Dataforth Thermocouples Significantly Improves Accuracy](#)

DISCONTINUED DEVICES - Isolator Products

Affected Devices	Replacement Devices	Affected Devices	Replacement Devices
DSCL22-01	None Available	DSCL24-11-1648	None Available
DSCL22-11	None Available	DSCL24-11-1675	None Available
DSCL22-21	None Available	DSCL24-11-1676	None Available
DSCL23-01	None Available	DSCL24-12-1540	None Available
DSCL23-02	None Available	DSCL24-12-1552	None Available
DSCL24-01	DSCP81-01	DSCL24-12-1553	None Available
DSCL24-02	DSCP81-02	DSCA24-12-1559	None Available
DSCL24-11	None Available	DSCL24-12-1617	None Available
DSCL24-12	None Available	DSCL24-12-1618	None Available
DSCL24-11-1575	None Available	DSCL24-12-1626	None Available

DISCONTINUED DEVICES - Backpanels

Affected Devices	Replacement Devices
SCMD-PB4RD	NONE
SCMD-JM8	Use To Depletion No Available Replacement
SCMD-PB8	SCMD-PB4, SCMD-PB16SM, SCMD-PB24SM
SCMD-PB8H	SCMD-PB4D, SCMD-PB16SMD, SCMD-PB24SMD
SCMD-PB8SM	SCMD-PB4, SCMD-PB16SM, SCMD-PB24SM
SCMD-PB8SMD	SCMD-PB4D, SCMD-PB16SMD, SCMD-PB24SMD
SCMD-PB16	SCMD-PB4, SCMD-PB16SM, SCMD-PB24SM
SCMD-PB16H	SCMD-PB4D, SCMD-PB16SMD, SCMD-PB24SMD

DISCONTINUED DEVICES - Power Supply

Affected Devices	Replacement Devices
PWR-4504	Use To Depletion No Available Replacement

DISCONTINUED DEVICES

Affected Devices	Replacement Devices
SLX200-20	None Available
SLX200-30	None Available
SLX200-21	None Available
SLX200-31	None Available
SLX200-20D	None Available
SLX200-30D	None Available
SLX200-21D	None Available
SLX200-31D	None Available

DISCONTINUED DEVICES - Sensor-to-Computer Products

Affected Devices	Replacement Devices	Affected Devices	Replacement Devices
SCM9B-1212	None Available	SCM9B-2562	None Available
SCM9B-1551	None Available	SCM9B-2611	None Available
SCM9B-1552	None Available	SCM9B-2612	None Available
SCM9B-1561	None Available	SCM9B-2641	None Available
SCM9B-1611	None Available	SCM9B-2642	None Available
SCM9B-1641	None Available	SCM9B-3161	None Available
SCM9B-2151	None Available	SCM9B-3162	None Available
SCM9B-2212	None Available	SCM9B-4121	None Available
SCM9B-2221	None Available	SCM9B-4131	None Available
SCM9B-2222	None Available	SCM9B-4162	None Available
SCM9B-2231	None Available	SCM9B-5311	None Available
SCM9B-2232	None Available	SCM9B-5331	None Available
SCM9B-2241	None Available	SCM9B-5341	None Available
SCM9B-2531	None Available	SCM9B-5342	None Available
SCM9B-2542	None Available	SCM9B-D132	None Available

DISCONTINUED DEVICES - Line Drivers and Converters

Affected Devices	Replacement Devices
LDM30-PE	None Available
LDM30-SE	None Available
LDM70-P	None Available
LDM70-PE	None Available
LDM70-PT	None Available
LDM70-SE	None Available
LDM80-S-025	None Available
LDM85-P	None Available
LDM85-PE	None Available
LDM85-PE-025	None Available
LDM85-S	None Available
LDM85-S-025	None Available
LDM85-SE-025	None Available
LDM85-ST	None Available
LDM422-PE	None Available
LDM422-SE	None Available
LDM485-PT	None Available
LDM485-ST	None Available
LDM485-PT-025	None Available
LDM485-SE	None Available

DATAFORTH WARRANTY

Applying to Products Sold by Dataforth Corporation

To view the current Dataforth Corporation Warranty, please click on the link below for the Dataforth Standard Terms and Conditions of Sale Applying to Products Sold by Dataforth Corporation. The Warranty in its entirety is Section 3. Please check this link periodically for updates.

<https://www.dataforth.com/terms-and-conditions-sale>

Application Support

Dataforth provides timely, high-quality product support. Call +1-800-444-7644 TOLL-FREE

Returns/Repair Policy

All warranty and repair requests should be directed to the Dataforth Customer Service Department at +1-520-741-1404. If a product return is required, visit [dataforth.com](https://www.dataforth.com), choose Sales Support on the blue bar and you will see the link to "Obtain an RMA". Fill out the online Return Materials Authorization (RMA) form. Be ready to provide the following information:

1. Complete product model number.
2. Product serial number.
3. Name, address, and telephone number of person returning product.
4. Special repair instructions or reason for return.
5. Purchase order number for out-of-warranty repairs.

The product should be carefully packaged, making sure the RMA number appears on the outside of the package, and shipped prepaid to:

Dataforth Corporation
ATTN: RMA Coordinator
6230 S. Country Club
Tucson, AZ 85706 USA

The information provided herein is believed to be reliable; however, DATAFORTH assumes no responsibility for inaccuracies or omissions. DATAFORTH assumes no responsibility for the use of this information, and all use of such information shall be entirely at the user's own risk. Application information is intended as suggestions for possible use of the products and not as explicit performance in a specific application. Prices and specifications are subject to change without notice. No patent rights or licenses to any of the circuits described herein are implied or granted to any third party. DATAFORTH does not authorize or warrant any DATAFORTH product for use in life-support devices and/or systems.

WORLD HEADQUARTERS

Dataforth Corporation

3331 E. Hemisphere Loop
Tucson, AZ 85706 USA
Toll Free: +1-800-444-7644
Tel: +1-520-741-1404
Fax: +1-520-741-0762
Email: sales@dataforth.com
www.dataforth.com

All Dataforth Products

Manufactured per
[RoHS III Directive EU 2015/863](#)

The Dataforth Quality

Management System is
[ISO9001:2015 Registered](#)



[**dataforth.com**](http://dataforth.com)