DATAFORTH[®]

DSCL22

Loop Powered Isolators - DIN or Panel Mount

Description

Each DSCL22 loop powered isolator provides 1, 2, or 3 channels of analog signal protection by electrically isolating its input from output for any DC process signal in the range of 0-20mA (or 4-20mA). The DSCL22 operates passively, obtaining its power from the transmitted signal (see Figure 1).

The input signal is chopped by a proprietary DC chopper circuit, isolation is provided by transformer coupling, a proprietary technique is used to suppress transmission of common mode spikes or surges, and the output signal from the secondary of the transformer is reconstructed to the original input signal.

If one input to two isolated outputs is desired, multiple channel units may be configured as a splitter (see Figure 2).

Features

- No Power Supply Required, Signal Powered from 0-20mA (or 4-20mA) Input
- · Simplified Wiring for Fast Installation
- DIN Rail or Panel Mountable
- Narrow DIN Package, Mounts up to 27 Devices into a 19" Rack Space
- No Recalibration or Maintenance Required
- Up to 4000Vrms Transformer Isolation
- Prevents Ground-Loop Problems
- Prevents the Transfer of Interference Voltages
 and Currents
- High Accuracy Over Full Span
- CE Compliant

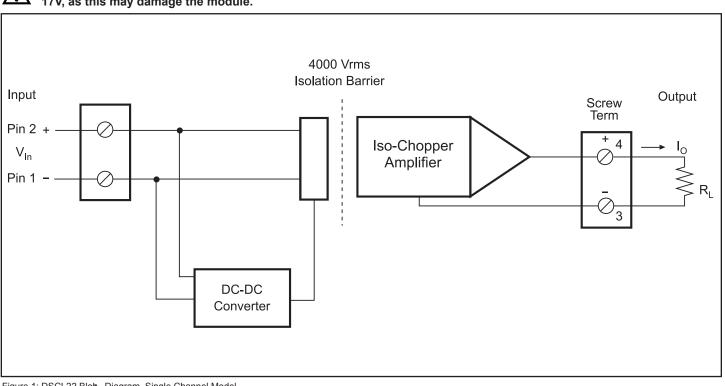


Figure 1: DSCL22 Blok Diagram, Single Channel Model

The compliance voltage or loop voltage must not exceed 17V, as this may damage the module.

DATAFORTH®

Specifications	Typical* at $T_A = +25$ °C; Load R = 250 Ω (current out)
-----------------------	---

DSCL22-01,-11,-21 0/4-20mA 50mA max at 27V max 4000Vrms (1ch) or
50mA max at 27V max 4000Vrms (1ch) or
2300Vrms (2 & 3ch), 1 Minute ±0.05% Span Typical ±0.1% Span Max Included in Accuracy <50ppm/°C <20μA (Typical 5μA) 25.65V max <2.6V (for 500Ω Load)
0/4-20mA 40mA 500Hz 112dB 20dB per Decade above 500Hz 1ms, to 90% Span 0-1000Ω ≩ 0mV (Typical \$ mV)
Weight Approximately 100g Lexan 940 (UL 94 V-O) 50g (10 Shocks, 3 Axis) -25°C to +55°C -40°C to +70°C 0 to 75% Noncondensing EN50081-2 (Radiated, Conducted) EN50082-2 (ESD, RF, EFT)

Ordering Information

Model	Channels	Input Range	Output Range	Figure
DSCL22-01	1	0-20mA (4-20mA)	0-20mA (4-20mA)	3
DSCL22-11	2	0-20mA (4-20mA)	0-20mA (4-20mA)	4
DSCL22-21	3	0-20mA (4-20mA)	0-20mA (4-20mA)	4

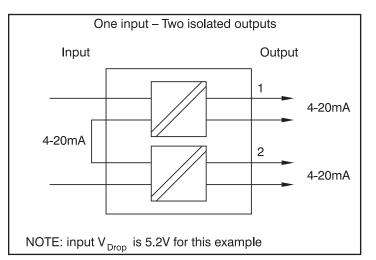


Figure 2: Multi-Channel Veris ons may be ue d as a Splitter

*Contact factory or your local Dataforth sales office for maximum values. (1) Additional error <0.05% per 100Ω above 250Ω

(2) V_{in}⊧ ₀R_L + 2 .6V

Dimensional and Wiring Information

The DSCL22 DIN mount package accepts EN50022 (35 x 7.5) type rails; Dataforth PN SCMXRAIL1-xx. Multiple DSCL22 modules may be mounted next to each other without affecting input or output signals. The DSCL22 may be mounted in any position.

Screw terminals with wire protection clamps sized for 2 x 0.75mm² or 1 x 2.5mm² wires. The DSCL22 requires no maintenance.